

Surface-Mount Electric Rim Strike

SD-998C-NUQ

The SECO-LARM SD-998C-NUQ Surface-Mount Electric Rim Strike is designed for rim exit devices with a 3/4" throw Pullman latchbolt. The strike features selectable fail-safe/fail-secure operation, 12/24 VDC operating voltage, horizontal adjustment, and a 3/4" (19mm) thick metal housing which eliminates the need for frame cutting when installing.




Features:

- 12/24 VDC Operating voltage
- Non-polarized plug-in wire connection
- Horizontal adjustment
- 3/4" (19mm) thick metal housing
- Accommodates up to 3/4" Pullman latch
- Reversible non-handed design fits most door frames
- Surface-mount installation on metal or wooden door frames
- Works with standard rim-type exit devices including SECO-LARM SD-962-AR-36A, SD-962AR-36G, and SD-962AR-36M
- Static strength – 1,500 lbs. (680kg)
- Tested for 250,000 cycles (UL Tested)
- Low current draw: 540mA@12VDC, 270mA@ 24VDC
- Dynamic strength 70 ft-lbs. (9.68 m-kgs)
- Field-selectable for fail-safe or fail-secure operation
- Five-year limited warranty



Dimensions:

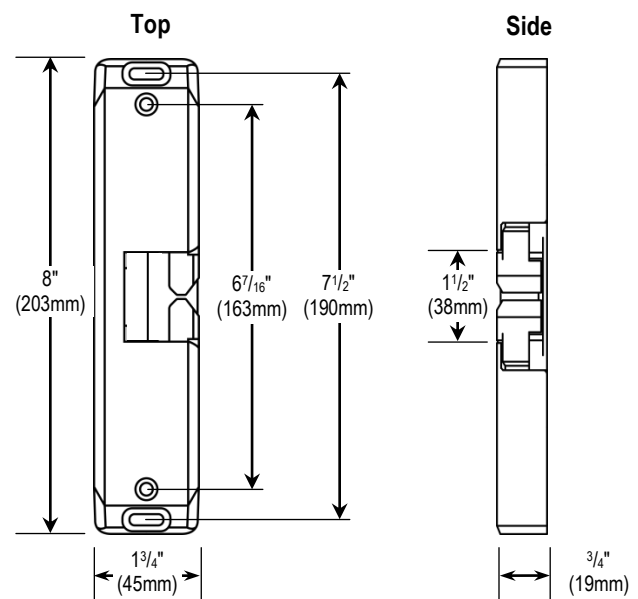

Specifications:

Operating voltage	12/24 VDC	
Current draw	12VDC	540mA
	24VDC	270mA
Operating temperature	14°~113° F (-10°~45° C)	
Operating humidity	0~95%	
Static strength	1,500 lbs. (680kg)	
Dynamic strength	70 ft-lbs. (9.68 m-kgs)	
Endurance	250,000 cycles (UL Tested)	
Dimensions	8"x1 3/4"x3/4" (203x45x19 mm)	

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2016 © SECO-LARM U.S.A., Inc. All rights reserved.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI_SD-998C-NUQ_161018a.docx