

## ProxCards<sup>®</sup> II Card

Durable, Value Priced Proximity Access Card



### Features:

- Offers universal compatibility with all HID proximity readers.
- Provides durable packaging and consistent read range.
- Provides an external number for easy identification and control.
- Supports formats up to 85 bits, with over 137 billion codes.
- Custom pre-printed artwork available.
- A PVC overlay allows for on-site photo ID using most direct image printers.
- Using HID's ProxProgrammer<sup>®</sup>, card vendors can ship ProxCards II proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

### THE RF-PROGRAMMABLE PROXCARD<sup>®</sup> II PROXIMITY ACCESS CARD IS THE INDUSTRY CHOICE FOR A COST-EFFECTIVE SOLUTION TO PROXIMITY ACCESS CONTROL.

- **Proven, Reliable Technology** – Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
- **Convenient To Use** – Can fit into a wallet or purse. Use with a strap and clip as a photo ID badge.
- **Cross-reference** – A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
- **Security** – Offers over 137 billion unique codes.
- **Long Life** – Passive, no-battery design allows for an infinite number of reads.
- **Durability** – Strong, flexible and resistant to cracking and breaking.
- **Companion Products**– 1321 Photo pouch overlay  
1324 PVC Direct print overlay

The RF-programmable ProxCards<sup>®</sup> II proximity access card is the industry choice for a cost-effective solution to proximity access control.


## SPECIFICATIONS

### ProxCards® II Card

|                                    |                                                                                                                                                                                                                                                                            |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Base Part Number</b>            | 1326                                                                                                                                                                                                                                                                       |
| <b>Typical Maximum* Read Range</b> | ProxPoint® Plus reader-up to 3" (7.5 cm)<br>MiniProx® reader-up to 5.5" (14 cm)<br>ThinLine® II reader-up to 5.5" (14 cm)<br>ProxPro® reader-up to 8" (20 cm)<br>ProxPro® II reader-up to 9" (22.9 cm)<br>Prox80™-up to 5.5" (14 cm)<br>MaxiProx® reader-up to 24" (60 cm) |
| <b>Dimensions</b>                  | 2.135" x 3.385" x 0.075" MAX.<br>(5.4 x 8.6 x 0.19 cm)                                                                                                                                                                                                                     |
| <b>Operating Temperature</b>       | -50° to 160° F (-45° to 70° C)                                                                                                                                                                                                                                             |
| <b>Options</b>                     | External card numbering<br>(inkjet only; no laser engraving)<br>Custom artwork (text or graphics)                                                                                                                                                                          |
| <b>Weight</b>                      | 0.24 oz. (6.8 gm)                                                                                                                                                                                                                                                          |
| <b>Warranty</b>                    | Lifetime                                                                                                                                                                                                                                                                   |

#### NOTES:

\*Dependent on local installation conditions.

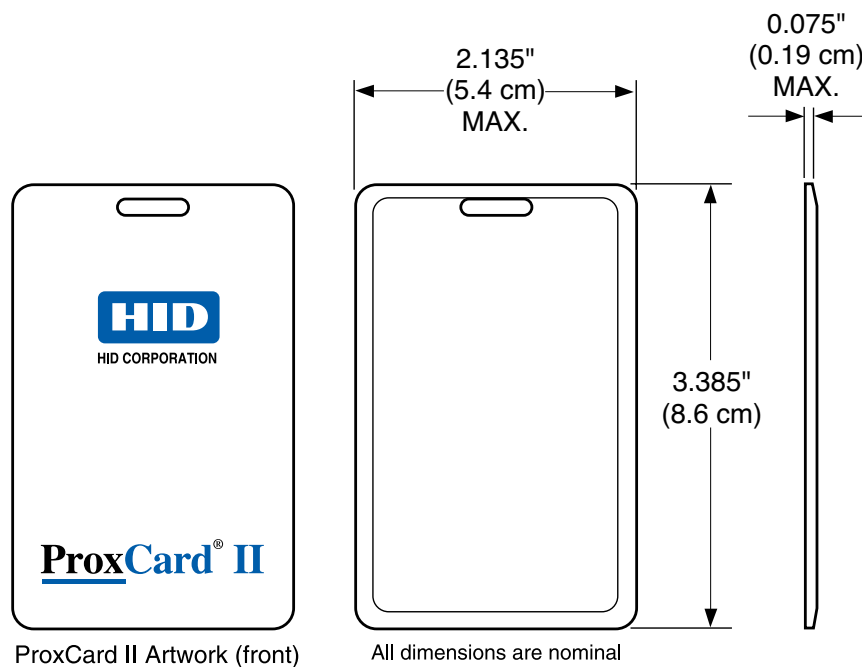

North America: +1 949 732 2000  
 Toll Free: 1 800 237 7769  
 Europe, Middle East, Africa: +44 1440 714 850  
 Asia Pacific: +852 3160 9800  
 Latin America: +52 55 5081 1650

[hidglobal.com](http://hidglobal.com)

#### ASSA ABLOY

An ASSA ABLOY Group brand

© 2011 HID Global Corporation. All rights reserved. HID, the HID logo, ProxCards logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks and product or service names are trademarks or registered trademarks of their respective owners.  
 2012-05-14-hid-proxcardsii-cards-ds-en