



186070-000 | FOSC450-B6-6-NT-0-B0V

FOSC™450 B6 Fiber Optic Splice Closure, Gel Cable sealing, no pre-installed tray, 6 cable attachments, with test valve

- Single-ended, O-ring sealed dome closure for splicing feeder and distribution cables
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- FOSC splice trays hinged for access to any splice without disturbing other trays
- Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- Compatible with CommScope's CWDM modules and optical splitter trays

Product Classification

| | |
|-----------------------|--------------------------------------|
| Brand | FOSC™ |
| Product Series | FOSC 450 |
| Product Type | Butt feeder and distribution closure |
| Regional Availability | Latin America North America |

Body Features

| | |
|------------|----------------|
| Cable Seal | Compressed Gel |
| Color | Black |

Configuration Features

| | |
|--------------------------------------|-----------|
| Port Shape | Round (6) |
| Flash Test Valve | Yes |
| Number of Pre-installed Splice Trays | none |
| Number of Cable Attachments | 6 |
| Slack Basket | Yes |


Dimensions

| | |
|------------------|------------------------|
| Closure Diameter | 254.000 mm 10.000 in |
| Length | 610.00 mm 24.02 in |

Operation/Application

| | |
|-------------|--------------------------|
| Environment | Direct burial Manholes |
|-------------|--------------------------|

Outline Drawing

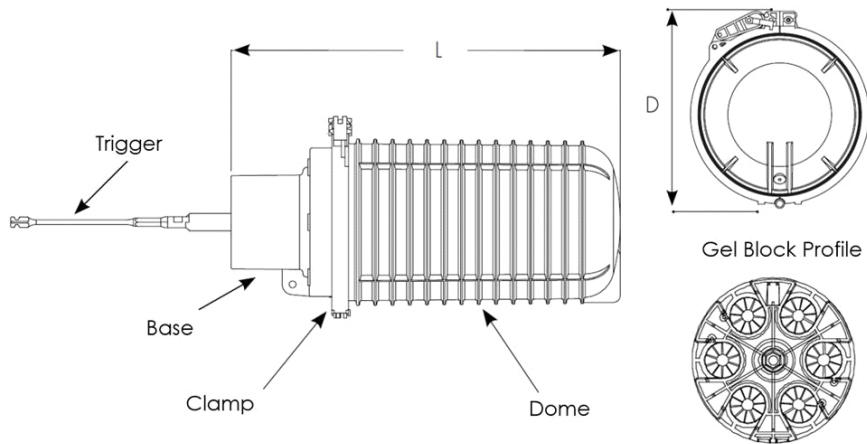

Packaging Features

| | |
|------------------------|------------|
| Minimum Order Quantity | 1 |
| Packaging Method | Box/Carton |

Regulatory Compliance/Certifications

Agency
RoHS 2011/65/EU

Classification
Compliant