Product Specifications





467054-000 | FOSC450-B6-6-24-1-B3V

FOSC[™]450 B6 Fiber Optic Splice Closure, Gel Cable sealing, one pre-installed 24-splice tray, 6 cable attachment, three ground feedthrough, with test valve

- Single-ended, O-ring sealed dome closure for splicing feeder and distribution cables
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- · Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- FOSC splice trays hinged for access to any splice without disturbing other trays
- Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- Compatible with CommScope's CWDM modules and optical splitter trays

Product Classification

Brand FOSC™ Product Series FOSC 450

Product Type Butt feeder and distribution closure
Regional Availability Latin America | North America

Body Features

Cable Seal Compressed Gel

Color Black

Configuration Features

Port Shape Round (6) Flash Test Valve Yes

Number of Pre-installed Splice Trays 24-fiber (1)

Cable Blocking Yes
Ground Feedthrough Yes
Ground Feedthrough Lugs 3
Number of Cable Attachments 6
Slack Basket Yes

Dimensions

Closure Diameter 254.000 mm | 10.000 in Length 610.00 mm | 24.02 in

Operation/Application


Environment Direct burial | Manholes

Product Specifications



467054-000 | FOSC450-B6-6-24-1-B3V

Outline Drawing

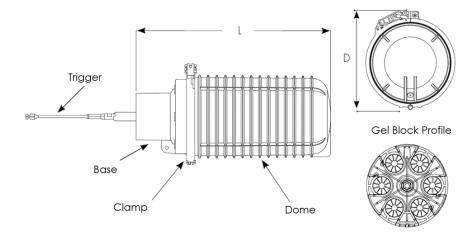

Packaging Features

Minimum Order Quantity 1
Packaging Method Box/Carton

Regulatory Compliance/Certifications

Agency Classification
RoHS 2011/65/EU Compliant