Product Specifications





A08617-000 | FOSC450-A4-4-NT-0-A1V

FOSC™450 A4 Fiber Optic Splice Closure, Gel Cable sealing, no pre-installed tray, 4 cable attach., one ground feedthrough lug, with test valve

- Single-ended, O-ring sealed dome closure for splicing feeder and distribution cables
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- FOSC splice trays hinged for access to any splice without disturbing other trays
- Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- Compatible with CommScope's CWDM modules and optical splitter trays

Product Classification

Brand FOSC™
Product Series FOSC 450

Product Type Butt feeder and distribution closure
Regional Availability Latin America | North America

Body Features

Cable Seal Compressed Gel
Color Black

Configuration Features

Splice Capacity 144 Round (4) Port Shape Flash Test Valve Yes Number of Pre-installed Splice Trays none Ground Feedthrough Yes Ground Feedthrough Lugs Number of Cable Attachments Slack Basket Yes Splice Capacity (Mass Fusion) Splice Capacity (Single Splice, SM12 Modules) 96 Splice Capacity (Single Splice, SM6 Modules)

Dimensions

Closure Diameter 205.000 mm | 8.071 in Length 485.00 mm | 19.09 in

Operation/Application


Environment Direct burial | Manholes

Product Specifications



A08617-000 | FOSC450-A4-4-NT-0-A1V

Outline Drawing

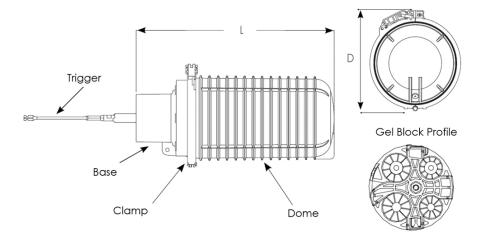

Packaging Features

Minimum Order Quantity 1
Packaging Method Box/Carton

Regulatory Compliance/Certifications

AgencyClassificationRoHS 2011/65/EUCompliant