

C-WM-A-WLAR Series

LED Architectural Wall Mount

Replaces 100W Incandescent

C-LITE
LED LIGHTING BY CREE

LONG-LASTING, DURABLE & STYLISH

LED Architectural Wall Mount delivers long-lasting (154,000 hours), bright light (1100 lumens) in a durable housing that is both sleek and stylish.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 1,100
- CRI: ≥ 70
- CCT: Cool White (5000K)
- Input Power: 14 Watts
- Dimmable: No
- Mounting: Wall
- Operating Minimum: -30°C (-22°F)
- Lifespan: Estimated 154,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 100W Incandescent

STYLISH	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Sleek construction accents exterior architecture• Anti-glare lens provides optimum light	<ul style="list-style-type: none">• Security• Stairways• Perimeter Lighting	<ul style="list-style-type: none">• 120V Operation with built-in photocell

ORDERING INFORMATION

Example: C-WM-A-WLAR-11L-50K-MB

C-WM-A	WLAR	11L	50K	MB
PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WM-A	WLAR LED Architectural Wall Mount	11L 1,100 Lumens, 14W	50K Cool White (5000K)	MB Medium Bronze

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/28/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-WM-A-WLAR Series

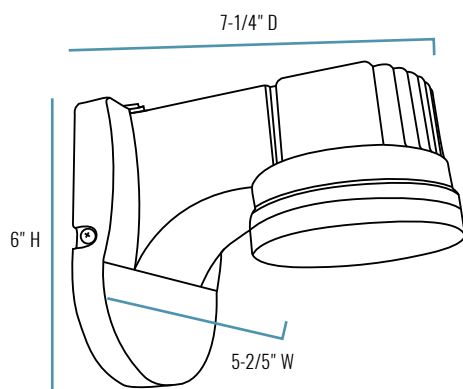

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
7-1/4" L x 5-2/5" W x 6" H	2.3 lbs.	8 to 18 feet	1-1/2 to 2 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Durable, die-cast aluminum housing Medium bronze polyester powder-coat finish
LENS ASSEMBLY	Anti-glare, heavy-duty frosted polycarbonate lens
MOUNTING	Mounts directly to recessed junction box with included mounting plate

ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-30°C (-22°F)	Estimated >154,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.12A	208V-277V No Draw	0.23A	0.20A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/28/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE