

C-WM-A-WLCY Series

LED Cylinder

Replaces 60W Incandescent

C-LITE
LED LIGHTING BY CREE

CLASSIC RESIDENTIAL LOOK & FEEL

LED Cylinder fixture provides exceptional security lighting, while reducing energy and maintenance costs. Its traditional design and long lifetime makes it a smart upgrade choice.



White finish
also available



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 600
- CRI: ≥ 70
- CCT: Neutral White (4000K)
- Input Power: 22 Watts
- Dimmable: No
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated 172,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 60W Incandescent

VALUE	LOW MAINTENANCE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Built-in photocell• Long lifetime - up to 172,000 hours	<ul style="list-style-type: none">• Fully-gasketed lens keeps bugs out• No relamping required	<ul style="list-style-type: none">• Security• Pathways• Perimeter Lighting	<ul style="list-style-type: none">• 120V Operation with built-in photocell

ORDERING INFORMATION

Example: C-WM-A-WLCY-6L-40K-DB

C-WM-A	WLCY	6L	40K	
PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WM-A	WLCY LED Cylinder	6L 600 Lumens, 22W	40K Neutral White (4000K)	DB Dark Bronze WH White

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/28/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-WM-A-WLCY Series

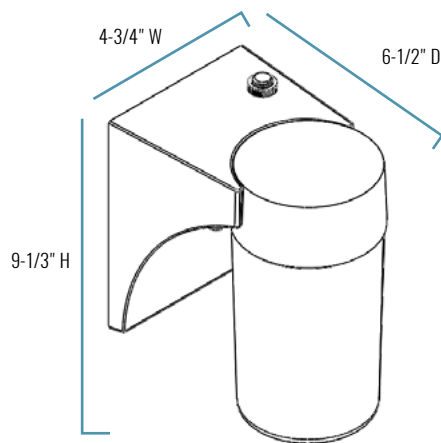

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
6-1/2" D x 4-3/4" W x 9-1/3" H	2.12 lbs.	6 to 10 feet	N/A

FIXTURE SPECIFICATIONS

HOUSING	Die-cast aluminum housing Available in dark bronze or white finish
LENS ASSEMBLY	Screw-in polycarbonate lens
MOUNTING	Bracket with threaded nipple mounts to standard 3" or 4" octagonal junction box

ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated >172,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.18A	N/A	N/A	N/A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/28/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE