

# C-WM-A-WLSP Series

## LED Globe

Replaces 75W Incandescent

**C-LITE**  
LED LIGHTING BY CREE

### CLASSIC RESIDENTIAL LOOK & FEEL

LED Globe fixture provides exceptional security lighting, while reducing energy and maintenance costs. Its traditional design and long lifetime makes it a smart upgrade choice.



White finish  
also available



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 800
- CRI:  $\geq 70$
- CCT: Neutral White (4000K)
- Mounting: Wall
- Input Power: 22 Watts
- Dimmable: No
- Operating Minimum:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )
- Lifespan: Estimated 172,000 Hours
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 75W Incandescent

VALUE	LOW MAINTENANCE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>• Built-in photocell</li><li>• Long lifetime - up to 172,000 hours</li></ul>	<ul style="list-style-type: none"><li>• Fully-gasketed lens keeps bugs out</li><li>• No relamping required</li></ul>	<ul style="list-style-type: none"><li>• Security</li><li>• Pathways</li><li>• Perimeter Lighting</li></ul>	<ul style="list-style-type: none"><li>• 120V Operation with built-in photocell</li></ul>

### ORDERING INFORMATION

Example: C-WM-A-WLSP-8L-40K-DB

C-WM-A	WLSP	8L	40K	
PRODUCT	STYLE	LUMEN PACKAGE	CCT	COLOR
C-WM-A	WLSP LED Globe	8L 800 Lumens, 22W	40K Neutral White (4000K)	DB Dark Bronze WH White

#### CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/28/2017

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details



# C-WM-A-WLSP Series

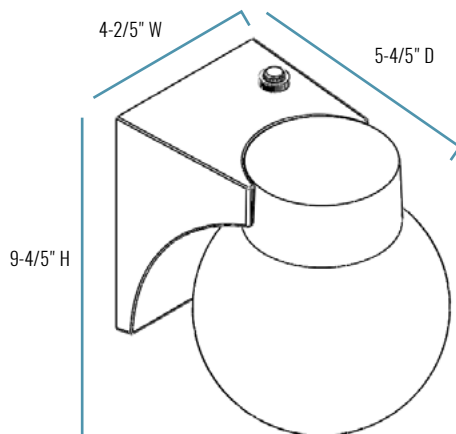

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5-4/5" D x 4-2/5" W x 9-4/5" H	2.22 lbs.	6 to 10 feet	N/A

## FIXTURE SPECIFICATIONS

HOUSING	Die-cast aluminum housing Available in dark bronze or white finish
LENS ASSEMBLY	Screw-in polycarbonate lens
MOUNTING	Bracket with threaded nipple mounts to standard 3" or 4" octagonal junction box

## ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 172,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.18A	N/A	N/A	N/A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.cree.com/patents](http://www.cree.com/patents). The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada) T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/28/2017

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING BY CREE