

C-WP-A-FCT3-6L Series

Premium LED Wall Pack - Medium
Replaces 150W PSMH/175 MH

C-LITE
LED LIGHTING BY CREE

REPLACE UP TO 150W PSMH/175W MH FOR LESS

Eliminate glare and uplight with this Premium LED Wall Pack.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 6,000, 6,200
- CRI: ≥ 70
- CCT: Neutral White (4000K), Cool White 5000K
- Input Power: 65-66 Watts
- Dimmable: No
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated >100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5 Years*
- Replaces 100W/175W PSMH

EFFICIENT	VALUE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Full cutoff design for direct downlight and true IES Type III distribution• Long estimated lifetime and low energy usage	<ul style="list-style-type: none">• High-quality aluminum construction• Use up to 60% less energy than previous models	<ul style="list-style-type: none">• Security• Pathways• Perimeter Lighting• When control of spill light is important	<ul style="list-style-type: none">• Universal (120V through 277V Operation)

ORDERING INFORMATION

Example: C-WP-A-FCT3-6L-40K-DB

C-WP-A	FCT3	6L		DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	FCT3 Premium LED Wall Pack	6L 6,000 Lumens (40K) 65W 6,200 Lumens (50K) 66W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 11/29/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-WP-A-FCT3-6L Series

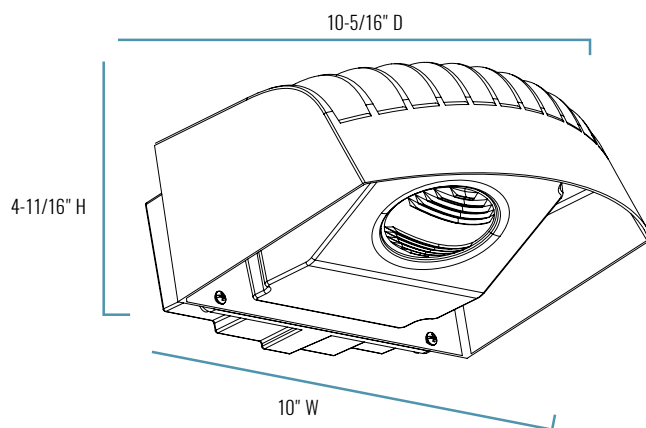

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
10-5/16" D x 10" W x 4-11/16" H	7.26 lbs.	15 to 18 feet	4 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Low-copper, die-cast aluminum housing and lens frame Dark bronze polyester powder-coat finish Heat dissipating fins
LENS ASSEMBLY	Fixed cutoff glare shield to reduce light pollution Tempered glass lens is thermal, shock & impact resistant Patented lens design delivers true IES Type III distribution
MOUNTING	1/2" threaded conduit entries on two sides and bottom or mount over recessed junction box Die-cast detachable back box for easy mounting

ELECTRICAL PERFORMANCE


OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated >100,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.55A	0.32A	0.28A	0.24A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5 Year Limited*	Wet Locations	DLC Qualified

C-WP-A-FCT3-6L Series

ACCESSORIES

	PHOTOCELL - BUTTON, 120V/208V/240V/277V
	<p>SKU: C-ACC-A-PCCELL-LV (120V) C-ACC-A-PCCELL-HV-TL (208V/240V/277V))</p> <p>USE: Photocell is field installed and drilling of the back box is required.</p>

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Northeast Energy Efficiency Partnerships, Inc.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 11/29/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE