

C-WP-A-TR-15L Series

LED High-Output Traditional Style Wall Pack

Up to 15,300 Lumens

Replaces 320W PSMH/400W MH

C-LITE
LED LIGHTING BY CREE

THE TRADITIONAL LOOK YOU WANT – NOW IN LED!



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 15,000, 15,300
- CRI: ≥ 70
- CCT: Neutral White (4000K), Cool White 5000K
- Input Power: 119 Watts
- Dimmable: No
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated 100,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 320W PSMH/400W MH

EFFICIENT	DURABLE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• Unbelievable energy savings (uses 70% less than 400W MH)• High-output, high-efficiency LED arrays	<ul style="list-style-type: none">• Heat & shock-resistant borosilicate glass lens• Heavy duty, die-cast aluminum housing	<ul style="list-style-type: none">• Security• Pathways• Perimeter Lighting	<ul style="list-style-type: none">• Universal (120V through 277V Operation)

ORDERING INFORMATION

Example: C-WP-A-TR-15L-40K-DB

C-WP-A	TR	15L		DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	TR LED High-Output Traditional Style Wall Pack	15L 15,300 Lumens (50K) 15,000 Lumens (40K) 119W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 11/29/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-WP-A-TR-15L Series

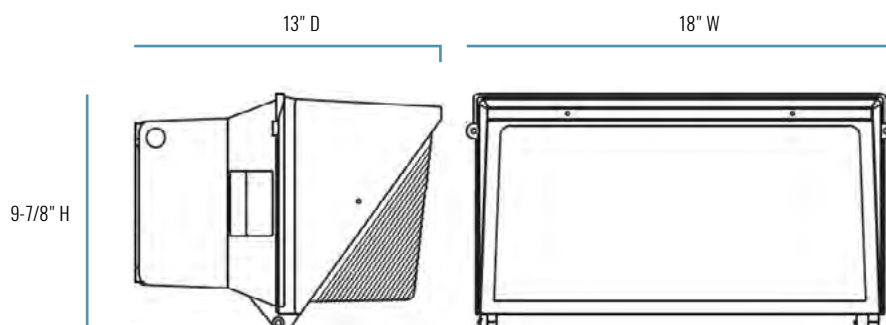

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
13" D x 18" W x 9-7/8" H	19.8 lbs.	15 to 20 feet	3 to 4 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Heavy duty, die-cast aluminum housing with hinged door frame Dark bronze powder-coat finish
LENS ASSEMBLY	Heat and shock-resistant borosilicate glass prismatic lens
MOUNTING	1/2" NPS knockouts on top and sides or rear mounting plate for conduit entry

ELECTRICAL PERFORMANCE


OPERATING MINIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 100,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.99A	0.57A	0.50A	0.43A

WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5 Year Limited*	Wet Locations	DLC Qualified

C-WP-A-TR-15L Series

ACCESSORIES

	PHOTOCELL - BUTTON, 120V/208V/240V/277V
	<p>SKU: C-ACC-A-PCCELL-LV (120V) C-ACC-A-PCCELL-HV-TL (208V/240V/277V))</p> <p>USE: Photocell is field installed and drilling of the back box in the field is required.</p>

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Northeast Energy Efficiency Partnerships, Inc.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 11/29/2017

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE