

# C-WP-A-TR-1L Series

## LED Wall Pack

Replaces 50W MH

**C-LITE**  
LED LIGHTING BY CREE

### REPLACE 50W MH WITH A FAMILIAR FIXTURE!

This longer-lasting wall pack (over 170,000 hours) uses 63% less energy than its 50W HID counterpart, while providing a familiar form factor for easy installation.



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 1,300
- CRI:  $\geq 70$
- CCT: Neutral White (4000K)
- Input Power: 20 Watts
- Dimmable: No
- Operating Minimum:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )
- Lifespan: Estimated 172,000 Hours
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 50W MH

EFFICIENT	DURABLE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>• Uses 63% less energy than 50W MH Wall Packs</li><li>• Can reduce utility costs &amp; labor when combined with optional photocell</li></ul>	<ul style="list-style-type: none"><li>• Aluminum reflector &amp; polycarbonate refractor withstand the test of time</li><li>• 1/2" NPT tapped back &amp; two sides for conduit entrances</li></ul>	<ul style="list-style-type: none"><li>• Security</li><li>• Pathways</li><li>• Perimeter Lighting</li></ul>	<ul style="list-style-type: none"><li>• 120 Operation</li></ul>

### ORDERING INFORMATION

Example: C-WP-A-TR-1L-40K-DB

C-WP-A	TR	1L	40K	DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	TR LED Wall Pack	1L 1,300 Lumens 20W	40K Neutral White (4000K)	DB Dark Bronze

#### CERTIFICATIONS:

US: [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415


Canada: [www.cree.com/canada](http://www.cree.com/canada) T (800) 473-1234 F (800) 890-7507

Rev. Date: V1 11/30/2017

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details



# C-WP-A-TR-1L Series

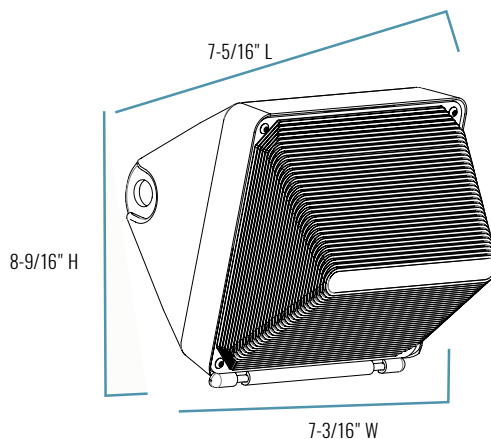

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	SHIPPING WEIGHT	MOUNTING HEIGHT	SPACING
7-5/16" D x 7-3/16" W x 8-9/16" H	2.5 lbs.	2.5 lbs.	8 to 12 feet	2 to 3 times the mounting height

## FIXTURE SPECIFICATIONS

HOUSING	Sturdy, die-cast aluminum housing and lens frame Dark bronze polyester powder-coat finish
LENS ASSEMBLY	One-piece anodized aluminum reflector UV-stabilized prismatic polycarbonate refractor
MOUNTING	1/2" NPT tapped back and two sides for conduit entrances

## ELECTRICAL PERFORMANCE


OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 172,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.17A	N/A	N/A	N/A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5 Year Limited*	Wet Locations

# C-WP-A-TR-1L Series

## ACCESSORIES

	<b>PHOTOCELL - BUTTON, 120V</b>
	<p>SKU: <b>C-ACC-A-PCCELL-LV</b> (120V)</p> <p>USE: Photocell is field installed and drilling of the back box in the field is required.</p>

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.cree.com/patents](http://www.cree.com/patents). The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada) T (800) 473-1234 F (800) 890-7507

Rev. Date: V1 11/30/2017

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING BY CREE