

# C-WP-A-FCT3-3L Series

Premium LED Wall Pack - Small  
Replaces 100W PSMH

**C-LITE**  
LED LIGHTING BY CREE

## REPLACE UP TO 100W PSMH

Eliminate glare and uplight with this Premium LED Wall Pack.



## PRODUCT SPECIFICATIONS

### OVERVIEW

- Initial Delivered Lumens: 3,500, 3,600
- CRI:  $\geq 70$
- CCT: Neutral White (4000K), Cool White 5000K
- Input Power: 33 Watts
- Dimmable: No
- Operating Minimum:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )
- Lifespan: Estimated >50,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 5 Years\*
- Replaces 100W PSMH

PREMIUM/FULL CUTOFF	EFFICIENT	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>• Stylish modern design</li><li>• Reduced uplight for control of spill light</li><li>• High-quality aluminum construction</li></ul>	<ul style="list-style-type: none"><li>• Uses up to 60% less energy than previous models</li><li>• Long estimated lifetime and low energy usage</li><li>• Optional photocell</li></ul>	<ul style="list-style-type: none"><li>• Security</li><li>• Pathways</li><li>• Perimeter Lighting</li><li>• When control of spill light is important</li></ul>	<ul style="list-style-type: none"><li>• Universal (120V through 277V Operation)</li></ul>

## ORDERING INFORMATION

Example: C-WP-A-FCT3-3L-40K-DB

C-WP-A	FCT3	3L		DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	FCT3 LED Small Wall Pack	3L 3,500 Lumens (40K) 3,600 Lumens (50K) 33W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze

### CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/29/2017

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details



# C-WP-A-FCT3-3L Series

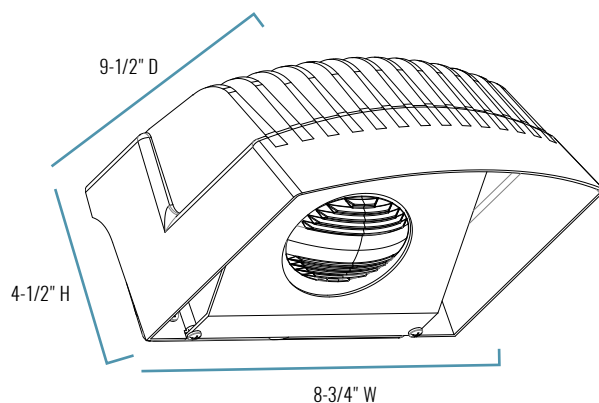

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
9-1/2" D x 8-3/4" W x 4-1/2" H	7.0 lbs.	8 to 15 feet	1 to 2 times the mounting height

## FIXTURE SPECIFICATIONS

HOUSING	Low-copper, die-cast aluminum housing and lens frame Dark bronze polyester powder-coat finish Heat dissipating fins
LENS ASSEMBLY	Fixed cutoff glare shield to reduce light pollution Tempered glass lens is thermal, shock & impact resistant Patented lens design delivers true IES Type III distribution
MOUNTING	1/2" threaded conduit entries on two sides and bottom or mount over recessed junction box Die-cast detachable back box for easy mounting

## ELECTRICAL PERFORMANCE


OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated >50,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.28A	0.16A	0.14A	0.12A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited*	Wet Locations

# C-WP-A-FCT3-3L Series

## ACCESSORIES

	PHOTOCELL - BUTTON, 120V/208V/240V/277V
	<p>SKU: <b>C-ACC-A-PCCELL-LV</b> (120V) <b>C-ACC-A-PCCELL-HV-TL</b> (208V/240V/277V))</p> <p>USE: Photocell is field installed and drilling of the back box is required.</p>

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.cree.com/patents](http://www.cree.com/patents). The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada) T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/29/2017

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING BY CREE