

# C-WP-A-TRAD-3L Series

## LED Traditional Style Wall Pack - Small

Replaces 100W PSMH

**C-LITE**  
LED LIGHTING BY CREE

A NEW TWIST ON AN OLD CLASSIC.



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 3,200, 3,400
- CRI:  $\geq 70$
- CCT: Neutral White (4000K), Cool White 5000K
- Input Power: 33 Watts
- Dimmable: No
- Operating Minimum:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )
- Lifespan: Estimated 76,000 Hours
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 100W PSMH

EFFICIENT	DURABLE	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"><li>• Uses 45% less energy than comparable HID fixtures</li><li>• Quick, easy installation</li></ul>	<ul style="list-style-type: none"><li>• Lens is heat and shock resistant</li><li>• Powder-coat finish withstands the test of time</li></ul>	<ul style="list-style-type: none"><li>• Security</li><li>• Pathways</li><li>• Perimeter Lighting</li></ul>	<ul style="list-style-type: none"><li>• Universal (120V through 277V Operation)</li></ul>

### ORDERING INFORMATION

Example: C-WP-A-TRAD-3L-40K-DB

C-WP-A	TRAD	3L		DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	TRAD LED Traditional Style Wall Pack	3L 3,200 Lumens (40K) 3,400 Lumens (50K) 33W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze

#### CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/30/2017

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details



# C-WP-A-TRAD-3L Series

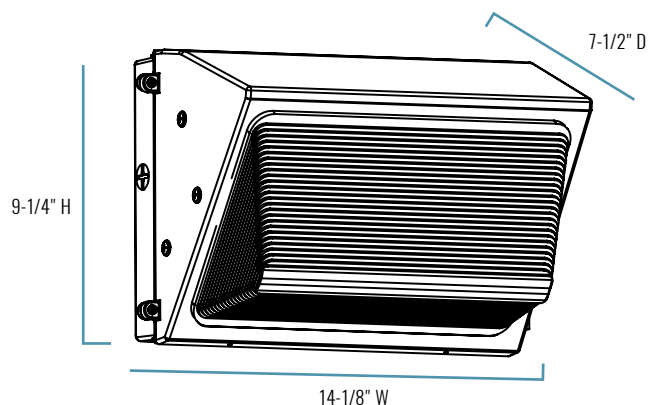

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
7-1/2" D x 14-1/8" W x 9-1/4" H	8.6 lbs.	8 to 18 feet	2 to 3 times the mounting height

## FIXTURE SPECIFICATIONS

<b>HOUSING</b>	Heavy duty, die-cast aluminum housing with hinged door frame Dark bronze polyester powder-coat finish
<b>LENS ASSEMBLY</b>	Heat and shock-resistant borosilicate glass prismatic lens
<b>MOUNTING</b>	1/2" NPT tapped knockouts for conduit entrances (one on top, one on each side, one on back)

## ELECTRICAL PERFORMANCE

OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 76,000 Hours	> 0.9	< 20%	No


INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.275A	0.16A	0.14A	0.12A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED
5-Year Limited*	Wet Locations

# C-WP-A-TRAD-3L Series

## ACCESSORIES

	<b>PHOTOCELL - BUTTON, 120V/208V/240V/277V</b>
	<p>SKU: <b>C-ACC-A-PCCELL-LV</b> (120V) <b>C-ACC-A-PCCELL-HV</b> (208V/240V/277V) USE: Photocell is field installed and drilling of the back box in the field is required.</p>

© 2017 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.cree.com/patents](http://www.cree.com/patents). The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: [c-lite.com](http://c-lite.com) T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada) T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 11/30/2017

For informational purposes only. Content is subject to change. \*See [lighting.cree.com/warranty](http://lighting.cree.com/warranty) for details

**C-LITE**  
LED LIGHTING BY CREE