

C-WM-A-WLHO Series

LED High-Output Wall Mount

Replaces 100W PSMH

C-LITE
LED LIGHTING BY CREE

BRIGHT LIGHT THAT LASTS - UP TO 172,000 HOURS!

This LED Wall Mount delivers over 3000 lumens and is the perfect replacement for your 100W PSMH wall mount fixture..



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 3,400, 3,600
- CRI: ≥ 70
- CCT: Neutral White (4000K), Cool White (5000K)
- Input Power: 36 Watts
- Dimmable: No
- Operating Minimum: -40°C (-40°F)
- Lifespan: Estimated 172,000 Hours
- Power Factor: > 0.9
- Total Harmonic Distortion: $< 20\%$
- Limited Warranty: 5 Years*
- Replaces 100W PSMH

| EFFICIENT | DURABLE | RECOMMENDED USE | INPUT VOLTAGE |
|---|--|--|--|
| <ul style="list-style-type: none">• Up to 99 lumens per watt• 65% more lumens than previous models | <ul style="list-style-type: none">• Heavy-duty polycarbonate housing and prismatic refractor that is built to last | <ul style="list-style-type: none">• Security• Pathways• Perimeter Lighting | <ul style="list-style-type: none">• 120V Operation with built-in photocell |

ORDERING INFORMATION

Example: C-WM-A-WLHO-34L-40K-MB

| C-WM-A | WLHO | | | MB |
|---------|------------------------------------|-----------------------------------|-------------------------------------|----------------------------|
| PRODUCT | STYLE | LUMEN PACKAGE | CCT | COLOR |
| C-WM-A | WLHO LED High-Output Wall Mount | 34L 3,400 Lumens 36W | 40K Neutral White (4000K) | MB Medium Bronze |
| | | 36L 3,600 Lumens 36W | 50K Cool White (5000K) | |

CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 01/24/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details



C-WM-A-WLHO Series

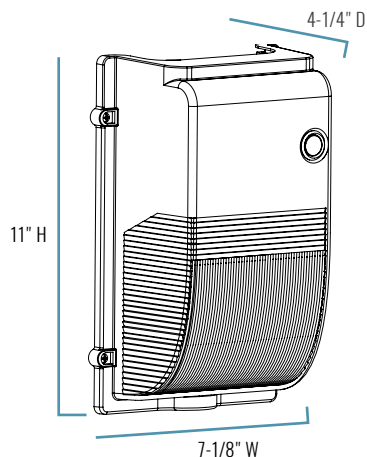

SERIES OVERVIEW

| DIMENSIONS | PRODUCT WEIGHT | MOUNTING HEIGHT | SPACING |
|-----------------------------|----------------|-----------------|---------|
| 4-1/4" D x 7-1/8" W x 11" H | 3.5 lbs. | 8 to 12 feet | N/A |

FIXTURE SPECIFICATIONS

| | |
|---------------|--|
| HOUSING | Polycarbonate housing in medium bronze with heavy-duty aluminum mounting plate |
| LENS ASSEMBLY | UV-stabilized polycarbonate prismatic refractor |
| MOUNTING | Mounts over a 4" square or octagonal junction box Knockouts provided on back and bottom of housing for 1/2" conduit entry |

ELECTRICAL PERFORMANCE

| OPERATING MINIMUM | LIFESPAN L ₇₀ AT 25°C (77°F) | POWER FACTOR | TOTAL HARMONIC DISTORTION | DIMMABLE |
|---------------------|--|--------------|------------------------------|----------|
| -40°C (-40°F) | Estimated >172,000 Hours | > 0.9 | < 20% | No |
| INPUT VOLTAGE | 120V | 208V | 240V | 277V |
| CURRENT DRAW (Amps) | 0.3A | N/A | N/A | N/A |

WARRANTY AND CERTIFICATIONS

| WARRANTY | UL LISTED |
|-----------------|---------------|
| 5 Year Limited* | Wet Locations |

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. The CREE LEDs logo, C-LITE™ and the C-LITE logo are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

US: c-lite.com T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V2 01/24/2018

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING BY CREE