

# PHILIPS

## Site & Area

### Area light



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

The **Philips Area light** features energy saving LED technology ideal for pole mounted area lighting applications. Area light is available with Type 3 and Type 4 distributions in two lumen packages, providing up to 24,300 lumens.

### Ordering guide

example: PAL-150-NW-G1-AR-3-8-BZ

Luminaire	Wattage	LED Color – Generation	Mounting	Distribution	Voltage	Controls	Finish
<b>PAL</b>		<b>NW-G1</b>	<b>AR</b>		<b>8</b>		<b>BZ</b>
<b>PAL</b> Area Light	<b>150</b> 150W <b>200</b> 200W	<b>NW-G1</b> Neutral White, 4000K, 70 CRI, Generation 1	<b>AR<sup>1</sup></b> Arm mounting	<b>3</b> Type 3 <b>4</b> Type 4	<b>8</b> 120-277 Volts	-- No motion sensor <b>IMRI<sup>2</sup></b> Motion sensor	<b>BZ</b> Bronze

1. Mounts to a square pole. Adapter included for 4" round poles.
2. IMRI is available with PAL-200 only.

### Specifications

#### Housing

Aluminum die-cast housing with attachable arm. Arm has removable cover for ease of wire connection.

#### IP Rating

LED light engine rated IP66. Driver compartment rated to IP65.

#### Vibration Resistance

3G vibration rating that conforms to standards set forth by ANSI C136.31. Testing includes vibration to 3G acceleration in all three axes.

#### Electrical

Driver efficiency (>90% at full load). Available in 120-277V. IP66 compliant driver. RoHS compliant. Surge protector standard. 10KA per ANSI/IEEE C62.41.2.

#### LED Board and Array

216 or 280 LEDs. Color temperature 4000K, +/- 250K. Minimum CRI of 70. Metal core substrate.

#### Optical System

Type 3 and 4 distributions available.

#### LED Thermal Management

The housing design allows the one piece housing to provide excellent thermal management critical to long LED system life.

#### Infrared Motion Response

Integral IMRI module is a passive infrared (PIR) motion sensor mounted integral on driver enclosure and is available with a sensor lens type to accommodate mounting heights up to 40' and occupancy coverage area up to 2,800 sq.ft (60' in diameter). Motion response for option IMRI is set/operates in the following fashion:

The motion sensor is set to a constant 30% if there is low natural light detected by the integrated photocell and no motion.

When motion is detected by the PIR sensor, the luminaire goes to full power/ light output.

Dimming on low is factory set to 30% with 5 minute default in "full power" prior to dimming back to low. When no motion is detected for 5 minutes, the motion response system reduces the wattage by 70%, to 30% of the normal constant wattage reducing the light level.

#### Mounting

Standard luminaire arm mounts to square poles. Round pole adapter included with every luminaire designed for 4" OD poles.

#### Energy Saving Benefits

System efficacy up to 126lm/W with significant energy savings over Pulse Start Metal Halide luminaires.

#### Listings

UL/cUL listed to the UL 1598 standard, suitable for Wet Locations. Suitable for use in ambient from -30° to 40°C (-22° to 104°F). All product configurations are DesignLights Consortium® qualified.

#### Finish

Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) textured polyester powdercoat finish. Standard color is bronze (BZ).

#### Limited Warranty

Luminaires, LED arrays, and drivers are all covered by a 5-year limited warranty. See philips.com/warranties for details.

# Lighttogo



# Area light LED

## PAL150/PAL200

### LED Wattage and Lumen Values

Ordering Codes	Total LEDs	System Current (mA)	Color Temp. (K)	Average System Wattage <sup>1</sup>	Type 3			Type 4		
					Lumen Output <sup>1,2</sup>	BUG Rating	Efficacy (LPW)	Lumen Output <sup>1,2</sup>	BUG Rating	Efficacy (LPW)
PAL150-NW-G1-AR	216	2850	4000K	147	18,585	B3-U0-G3	126	18,324	B3-U0-G3	125
PAL200-NW-G1-AR	280	3800	4000K	197	24,382	B4-U0-G4	124	24,109	B3-U0-G3	122

1. Wattage and lumen output may vary by due to LED manufacturer forward volt specification and ambient temperature. Wattage shown is average for 120V through 277V input. Measured wattage may vary due to variation in input voltage.
2. Lumen values based on photometric tests performed in compliance with IESNA LM-79. Contact [outdoorlighting.applications@philips.com](mailto:outdoorlighting.applications@philips.com) for details or additional information.


### Predicted Lumen Depreciation Data

Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output. Calculated per IESNA TM21-11. Published L70 hours limited to 6 times actual LED test hours.

Ambient Temperature °C	LED Current	System Current	Calculated L <sub>70</sub> hrs <sup>1,2</sup>	L <sub>70</sub> per TM21 <sup>2,3</sup>	Lumen Maintenance @ 50,000hrs
25 °C	120mA	2850mA	>68,000	>54,000	77%
25 °C	120mA	3800mA	>68,000	>54,000	77%

1. Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions.
2. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output.
3. Calculated per IESNA TM 21-11. Published L70 hours limited to 6 times actual LED test hours.

### Dimensions

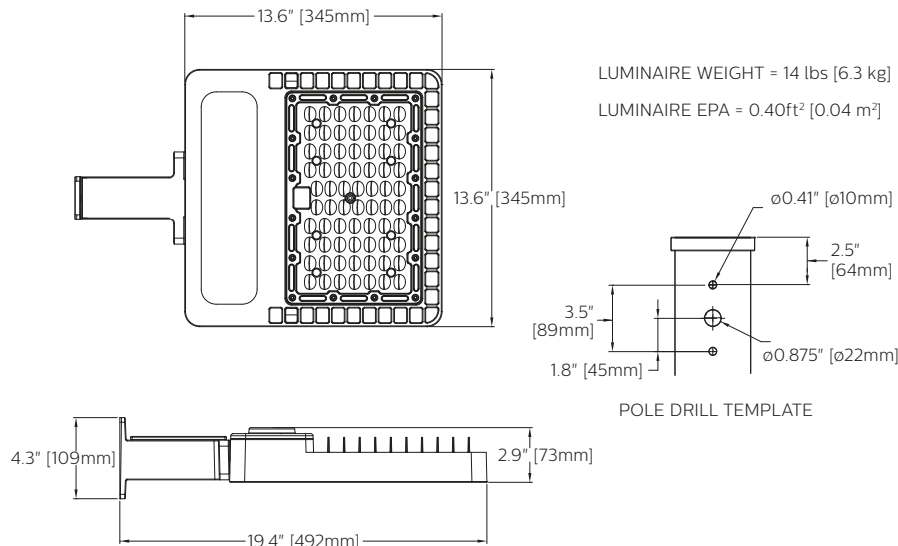

© 2017 Philips Lighting Holding B.V. All rights reserved.  
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.  
[philips.com/Lighttogo](http://philips.com/Lighttogo)



Philips Lighting North America Corporation  
200 Franklin Square Drive, Somerset, NJ 08873  
Tel. 855-486-2216

Philips Lighting Canada Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008