

# Zipcord Tight-Buffered Cable, Plenum

2 F, 62.5  $\mu$ m multimode (OM1)

CORNING

Corning zipcord cables are designed for interconnect applications. Two 900  $\mu$ m TBI<sup>®</sup> buffered fibers are surrounded by aramid yarn strength members and a flame-retardant jacket. This cable design offers mechanical durability and flame resistance that meet the requirements of the National Electrical Code<sup>®</sup> (NEC) Article 770.

*This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Meets NEC requirements

Meets burn test criteria

### All-dielectric strength member

Mechanical durability


## Standards

### Approval and Listings

National Electrical Code<sup>®</sup>  
(NEC<sup>®</sup>) OFNP, CSA FT-6,  
ICEA S-83-596

### Flame Resistance

NFPA 262 (for plenum, riser and general building applications)

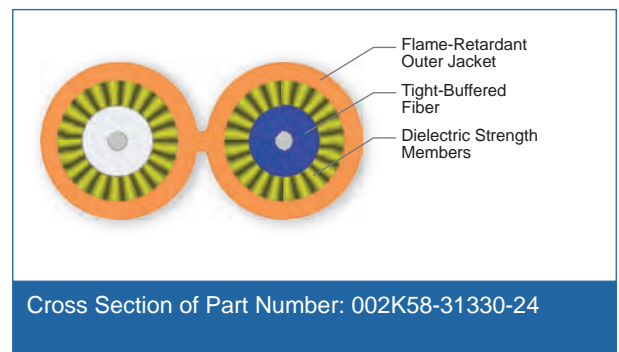

## Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser, Plenum
Cable Type	Tight-Buffered
Product Type	Interconnect
Flame Rating	Plenum (OFNP)
Fiber Category	62.5 $\mu$ m MM (OM1)

CORNING

# Zipcord Tight-Buffered Cable, Plenum

2 F, 62.5 µm multimode (OM1)

CORNING

## Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Operation	0 °C to 70 °C (32 °F to 158 °F)

## Cable Design

Fiber Count	2
Tight Buffer Color	Blue, White
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Subunits	2
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Orange

## Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	220 N (50 lbf)
Max. Tensile Strength, Long-Term	66 N (15 lbf)
Nominal Outer Diameter	2.0 mm x 4 mm (0.08 in x 0.16 in)
Weight	7.4 kg/km (5.2 lb/1000 ft)
Min. Bend Radius Installation	50 mm (2 in)
Min. Bend Radius Operation	10 mm (0.4 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Core Diameter	62.5 µm
Fiber Category	OM1
Fiber Code	K
Performance Option Code	30
Wavelengths	850 nm / 1300 nm

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

CORNING

# Zipcord Tight-Buffered Cable, Plenum

2 F, 62.5 µm multimode (OM1)

CORNING

## Fiber Specifications

Optical Characteristics (cabled)	
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -

Notes: 1) Improved attenuation and bandwidth options available.  
2) Bend-insensitive single-mode fibers available on request.  
3) Contact a Corning Customer Care Representative for additional information.

## Ordering Information

Part Number	002K58-31330-24
Product Description	Zipcord Tight-Buffered Cable, Plenum, 2 F, 2.0 mm diameter, 62.5 µm multimode (OM1)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).  
Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING