


FREEDM® LST™ Loose-Tube, Gel-Free Cable, Riser

4 F, Single-mode (OS2)

CORNING

Corning FREEDM® LST™ gel-free cables are flame-retardant, indoor/outdoor, riser-rated cables designed for interbuilding and intrabuilding backbones in aerial, duct and riser applications. With a riser rating, there is no need for a transition splice when entering the building. Available in a compact design, these cables are protected against water penetration by innovative waterblocking tapes and yarns that swell to absorb water. Waterblocking without the use of messy gels provides more efficient and craft-friendly cable preparation, allows easier cable access and simplifies the use of buffer tube fan-out kits. The buffer tubes and fibers in each tube are color coded for quick, easy identification.

Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

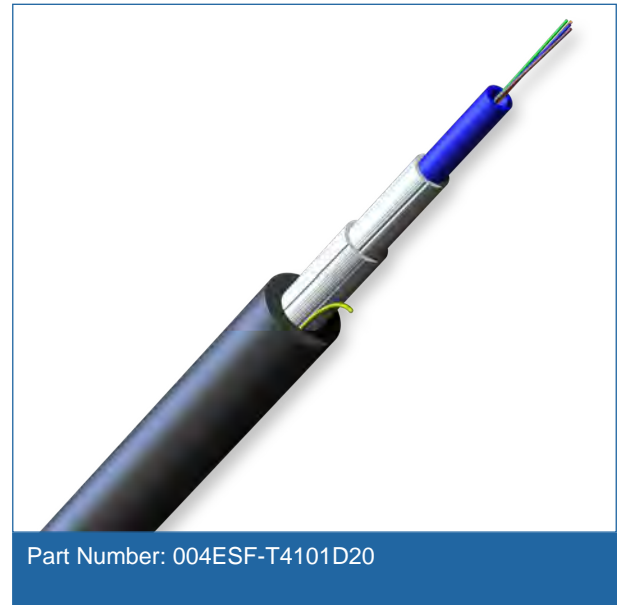

Part Number: 004ESF-T4101D20

Features and Benefits

Riser rating

No transition splices when entering buildings

Gel-free waterblocking technology

Craft-friendly cable preparation

Color-coded fibers


Quick and easy identification

All-dielectric construction

Requires no grounding or bonding

UV-resistant, flame-retardant jacket

Rugged, durable and easy to strip

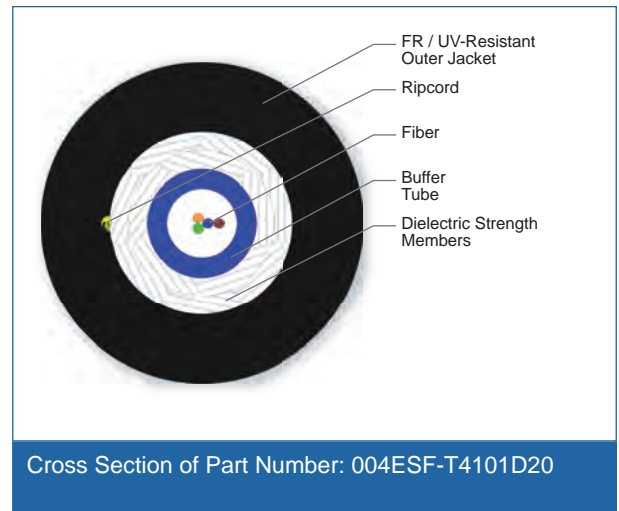

Cross Section of Part Number: 004ESF-T4101D20

Standards

Approval and Listings

National Electrical Code®
(NEC®) OFNR, CSA OFN
FT-4

Common Installations

Outdoor lashed aerial and duct; indoor vertical riser and general purpose horizontal according to National Electrical Code (NEC) Article 770

CORNING

FREEDM® LST™ Loose-Tube, Gel-Free Cable, Riser

4 F, Single-mode (OS2)

CORNING

Standards

Design and Test Criteria ANSI/ICEA S-104-696

Specifications

General Specifications

Environment	Indoor/Outdoor Cables
Application	Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser)
Cable Type	Loose Tube
Product Type	Dielectric
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Fiber Count	4
Fiber Coloring	Blue, Orange, Green, Brown
Fibers per Tube	4
Number of Tube Positions	1
Number of Active Tubes	1
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tensile Strength Elements and/or Armoring - Layer 2	Water-swellable dielectric strength members
Number of Ripcords	1
Outer Jacket Material	Flame-Retardant, UV-Resistant
Outer Jacket Color	Black

Mechanical Characteristics Cable

Weight	56 kg/km (38 lb/1000 ft)
Nominal Outer Diameter	7.4 mm (0.29 in)

CORNING

FREEDM® LST™ Loose-Tube, Gel-Free Cable, Riser

4 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	1350 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)
Min. Bend Radius Installation	111 mm (4.4 in)
Min. Bend Radius Operation	37 mm (1.5 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28e+® fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical attenuation	0.33 dB/km / 0.33 dB/km / 0.19 dB/km

* Typical attenuation values match the attenuation values listed in the optical fiber specifications. See www.corning.com/opticalfiber for Corning optical fiber specifications. Better attenuation performance options are available for some fiber and cable types. Contact Customer Care for additional fiber options.

* * SMF-28® Ultra and ClearCurve® XB fiber deliver up to 10x better macrobend loss performance compared to the G.652.D standard and up to 33 percent better macrobend loss performance than the G.657.A1 standard for 10mm radii bends.

Ordering Information

Part Number	004ESF-T4101D20
Product Description	FREEDM® LST™ Single-Tube, Gel-Free Cable, 4 F, Single-mode (OS2)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING