



-40° TO +70°



802.11ac



802.3at



802.3af/at



IP67



2



The NetWave® NW9[E] ultra-high throughput, impact-resistant hardened wireless Ethernet transmission device can be configured through the embedded User Interface as a Client or as an Access Point. This single radio model was designed for high throughput point-to-point or multi-point applications and comes with an integrated 19dBi, 17° beamwidth antenna. The NW9[E] supports up to 500 Mbps throughput using 802.11ac MIMO technology. The units can be powered by an 802.3af/at PoE compliant device or through a sold-separately PoE injector with the second Ethernet port serving as an IEEE802.3at power source. The NW9 is FCC certified for use in North America and the NW9E is ETSI, DFS and TPC certified for use in the European Union.

FEATURES

- › Up to 500 Mbps throughput
- › Sturdy cast aluminum enclosure
- › IEEE802.3at PoE Compliant PD
- › Over current protection and 3 layers of Ethernet surge suppression on the PD port
- › 802.11ac Compliant
- › Distances up to 2 mi (FCC) or 2km (ETSI)
- › Distances up to 4 mi (FCC) with MAC Lock enabled
- › Environmentally Hardened -40° to +70°C
- › Meets class IP67 dust and water immersion protection standards
- › ETSI Standards (EU Region only):
 - DFS Dynamic Frequency Selection
 - TPC Transmit Power Control
- › Secure transmission: WPA2 - AES or TKIP encryption
- › ComNet Antenna alignment feature eases installation and setup
- › RF Spectrum Survey Tools
- › Antenna Alignment Tools
- › LED array displays unit operational status along with received signal strength
- › Radio Internal Components covered by Lifetime Warranty.
- › Enclosure covered by Three Year Warranty.

APPLICATIONS

- › High Throughput Back Haul Link for installations that require connecting to more than one Ethernet device
- › Ideal for PoE Camera connectivity
- › Simple to deploy and cost-effective alternative to physical connections to Ethernet edge equipment
- › Integration of Ethernet where right-of-way issues mandate wireless communications
- › ITS traffic signalization networks and Video Detection Systems (VDS)
- › Multicast traffic-based video systems
- › ITS roadside and city center CCTV surveillance, and surveillance of high-value or mission-critical assets
- › Wireless communications in manufacturing, petrochemical refineries, wastewater treatment facilities, and other industrial automation and control applications operating in harsh or out-of-plant environments
- › Electrical substation video and perimeter surveillance

SPECIFICATIONS

5GHz Wireless Radio

EIRP	NW9 (FCC): Up to +36dBm for point to multipoint deployments, +49dBm for point to point deployments with MAC-lock feature enabled NW9E (ETSI): +30dBm
RF Output	+30dBm Rated Transmitter
Operational Frequency	5180MHz – 5825MHz, Region-dependent. Not all frequencies are supported in all regions. Contact ComNet for frequencies supported in your region.
Bandwidths	10, 20, 40, and 80MHz

Internal Antenna

Antenna	Internal 19dBi Dual Polarized Directional
Gain	19dBi
Azimuth	17° Horizontal/Vertical
Elevation	17° Horizontal/Vertical

Connectors

Gigabit Ethernet	2 × RJ-45, Sealed Cable Gland
------------------	-------------------------------

Software Features

Addressing	Static IP / DHCP Client / DHCP Server
SNMP	V3
Spanning Tree Protocol support	
Telnet Server	
Syslog	
802.1x Port-Based Network Access Control	
NTP Client	
User-Configurable Watchdog and Auto-Reboot Mechanism	
Multi-Level Configuration and Monitoring Login Accounts	
User Configurable Long Range Parameters	

Power

Operating Power	48 to 57 VDC @ 170 mA
Power Consumption	8 W Max (with no PD load connected to port 2)
PD Power	IEEE802.3af/at PD compliant
PSE Power	IEEE802.3at PSE compliant

Mechanical

Indicating LEDs	Power On Ethernet Link Signal Strength
Size (L × W × H)	10.27 × 10.27 × 1.38 in (26.1 × 26.1 × 3.5 cm)
Shipping Weight:	<5.5 lb / 2.5 kg

Environmental

MTBF	>100,000 hours
Operating Temp	-40° C to +70° C
Storage Temp	-40° C to +85° C
Relative Humidity	5% to 95%, non-condensing ¹

Warranty

Internal Components	Lifetime
Enclosure	3 Year

AGENCY COMPLIANCE

PART 15
COMPLIANT

RoHS



Low Power Consumption


ORDERING INFORMATION

Part Number	Description
NW9	Individual Hardened Single Radio, Two Gb Ethernet Ports, One internal 19dBi 17° beamwidth directional antenna, includes pole mounting assembly, Port 1 Supports 802.3af/at PD PoE Power , Port 2 provides IEEE802.3at PSE PoE Power , FCC certified for use in NA Region
NW9E	Individual Hardened Single Radio, Two Gb Ethernet Ports, One internal 19dBi 17° beamwidth directional antenna, includes pole mounting assembly, Port 1 Supports 802.3af/at PD PoE Power , Port 2 provides IEEE802.3at PSE PoE Power , ETSI certified for use in EU Region
Included Accessories	Mounting Hardware Kit (For Pole Mounting Only)
Options	CNGE1IPS - 35W PoE Injector (sold separately) [1]Add suffix 'C' for Conformally Coated Circuit Boards to extend to condensation conditions (Extra charge, consult factory)

NOTE: In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

TYPICAL APPLICATIONS

High Throughput Point-to-Point Topology (Shown with PoE Cameras)

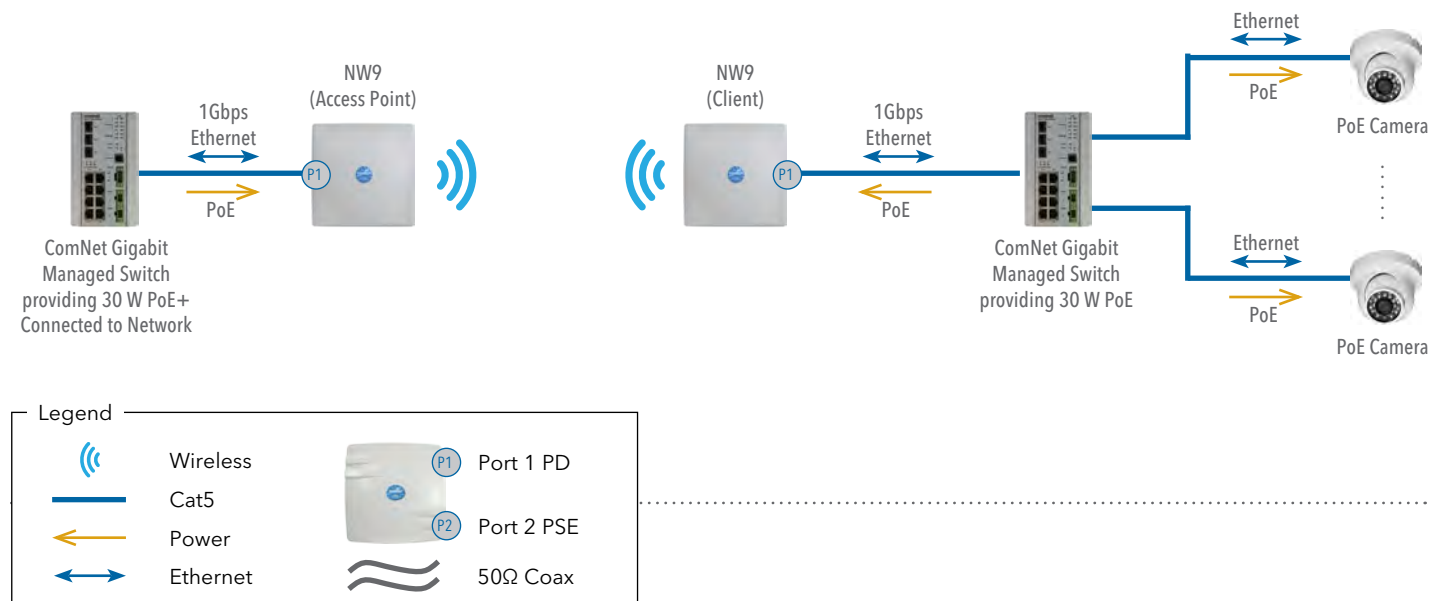

Point-to-Point Topology (Shown with PoE Injector and PoE Powered Cameras)

