

## NetWaySP4WPX 4-port PoE+ Hardened Switch

### Description

Altronix NetWaySP4WPX Outdoor PoE+ Hardened Switch provides two (2) 1Gb SFP (Fiber) ports and four (4) PoE+ (30W) or two (2) Hi-PoE (60W) ports, passing data for PoE/PoE+/Hi-PoE compliant devices. Cameras/edge devices may be located up to 100m from the unit. Embedded LINQ Technology allows you to monitor, control, and report power and diagnostics from anywhere.



NetWaySP4WPX

### Key Features


- Two (2) Gigabit SFP ports.
- 120W total power:
  - Four (4) PoE/PoE+ (up to 30W) ports or two (2) Hi-PoE (60W) ports.
- Four (4) 10/100/1000 Mbps ports.
- IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W).
- PoE activity LED indicators.
- UL Listed in the U.S. and Canada.
- CE Approved.

- Automatic switch over to stand-by battery when AC fails.
- Lifetime Warranty / Made in the U.S.A.

### Similar products:

- NetWaySP4WP - Outdoor 4-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure.
- NetWaySP4WPN - Outdoor 4-port PoE+ Hardened Switch only in NEMA 4/4X, IP66-11 enclosure.
- NetWaySP4X - Indoor 4-port PoE+ Hardened Switch.
- NetWaySP4PL - 4-port PoE+ Hardened Switch on Backplane.
- NetWaySP4B - 4-Port PoE+ Switch board only.

### Typical Application

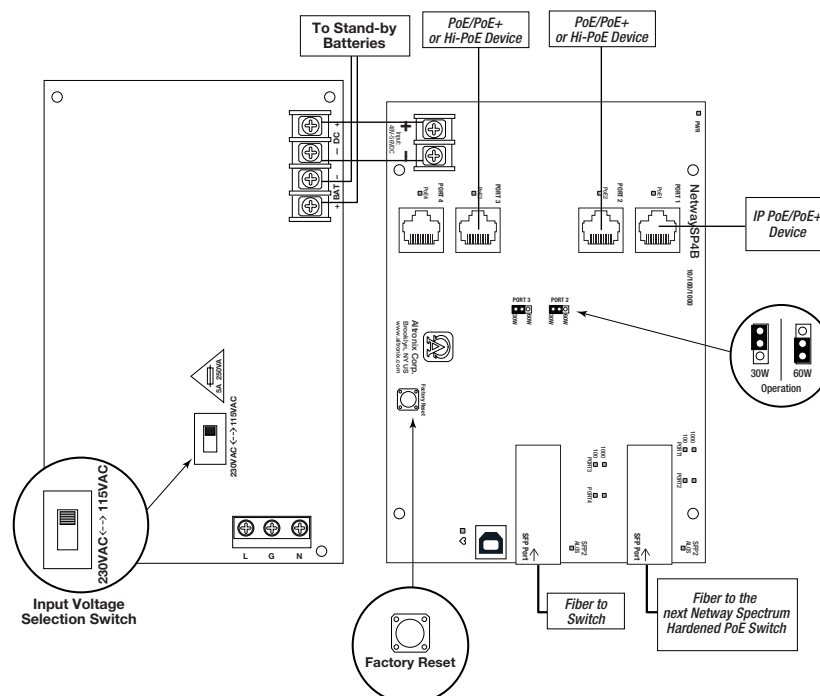

# NetWaySP4WPX

## 4-port PoE+ Hardened Switch

### Specifications

#### Input

Voltage	115VAC, 60Hz, 2.5A or 230VAC, 50/60Hz, 1.3A.
Fusing	5A/250V.

#### Power Output

Maximum Power	Four (4) PoE+ (30W) ports or two (2) Hi-PoE (60W) ports. IEEE 802.3at (30W) and IEEE 802.3af (15W) compliant. 120W total power. Integral surge protection.
---------------	---

**Fiber Ports:** Two (2) Gigabit SFP ports.

**Ethernet Ports:** Four (4) 10/100/1000 Mbps ports.  
Connectivity: RJ45, auto-crossover.  
Wire type: 4-pair CAT5 or better structured cable.  
Distance: up to 100m.  
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation.

#### Back-up Battery (not included)

Type	Sealed lead acid or gel type.
Failover	Upon AC loss, instantaneous.

#### Indicators (LED)

Individual PoE On LEDs for each port.  
Individual IP Link status, 10/100Base-T/active LEDs for each port.  
ALOS LED indicates fiber connection for SFP port.  
Heartbeat LED indicates proper operation of the unit.

#### LINQ Technology:

Remote network management allows for camera/device reset and monitoring.  
Provides local and/or remote access to critical information via LAN/WAN.  
Email and Windows Dashboard Alert notifications report real-time diagnostics.  
Event log tracks history.

#### Agency Listings

UL/cUL	UL60950-1 (Information Technology Equipment). UL60950-22 (Information Technology Equipment to be installed Outdoors).
CE	European Conformity.

#### Physical and Environmental

##### Enclosure Dimensions (H x W x D approx.):

17.53" x 15.3" x 6.67" (445.3mm x 388.6mm x 169.4mm).

NEMA 4/4X, IP66-11 Rated enclosure for outdoor use.

Accommodates four (4) 12VDC/4AH batteries (48V of backup).

##### Product Weight / Shipping (approx.)

Product Weight:	15 lb. (6.8 kg).
Shipping Weight:	17.5 lb. (7.9 kg).

##### Temperature

Operating:	60W: -40°C to 75°C (-40°F to 167°F). 75W: -40°C to 70°C (-40°F to 158°F). 100W: -40°C to 55°C (-40°F to 131°F). 120W: -40°C to 45°C (-40°F to 113°F).
------------	--

Storage: -40°C to 85°C (-40°F to 185°F).

Relative Humidity: 85% +/-5%.

BTU/Hr. (approx.): 61 BTU/Hr.

Operating Altitude: -304.8 to 2,000m.

### Accessories



#### NetWaySP1A - Ethernet over Fiber Media Converter/Repeater

*For Applications requiring an additional SFP (Fiber) Port*

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



#### P1MM and P1SM10 - SFP Modules

Altronix P1MM and P1SM10 are hot-pluggable SFP fiber transceiver modules and are readily usable with all Altronix Spectrum fiber optic equipment for 1G transmission rates. The P1MM is to be used with Multi-Mode Fiber for distances up to 550m. The P1SM10 is to be used with Single-Mode Fiber for distances up to 10Km.



#### PMK2 Pole Mount Kit (order separately)

PMK2 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8"(diameter) poles.