


OLS350220

Off-Line Switching Power Supply/Charger

Description

Altronix OLS350220 power supply/charger converts a 220VAC (working range 198VAC - 256VAC), 50/60Hz input into a 24VDC output. This unit has a wide range of applications for access control and security system accessories that require additional power.

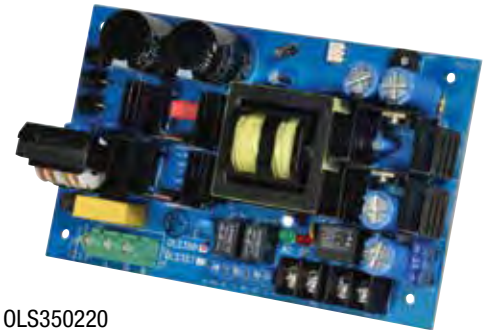

OLS350220

Specifications

Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz 2.5A.
---------	--

Outputs

Voltage	24VDC.
Current	12A continuous supply current.
Other	Short circuit and thermal overload protection. Filtered and regulated.

Back-up Battery *(not included)*

Type	Sealed lead acid or gel type.
Failover	Upon AC loss, instantaneous.

Supervision

AC Failure	Form "C" contacts.
Battery Low/Fail	Form "C" contacts.

Indicators (LED)

Input	Input voltage is present.
DC Output	Powered.

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (L x W x H) 7.25" x 4.5" x 1.75" (184.1mm x 114.3mm x 44.5mm).	
Product Weight	1.1 lbs. (0.5 kg).
Shipping Weight	1.4 lbs. (0.64 kg).
Temperature	
Operating	0°C to 49°C (32°F to 120°F).
Storage	-20°C to 70°C (-4°F to 158°F).
Relative Humidity	85% +/-5%.
BTU/Hr (approx.):	147 BTU/Hr.

OLS350220

Off-Line Switching Power Supply/Charger

Board Dimensions (L x W x H) and Drawing

7.25" x 4.5" x 1.75" (184.1mm x 114.3mm x 44.5mm)

