

RT Series Remote Transmitters

WIRELESS TRANSMITTERS AND RECEIVERS

MODELS RT-1 & RT-3

FEATURES

- **RT-1** Kit includes one channel receiver and two transmitters with mount and keychain
- **RT-3** Kit includes three channel receivers, one transmitter with mount and keychain
- Transmitter mounts allows for mounting under a desk or on a wall
- 12" antenna allows for up to 300' of range
- Rolling code with more than one billion code combinations
- Latching option allows you to keep doors unlocked until you press the button again
- Receiver can be controlled by up to thirty transmitters and has a five second momentary output

APPLICATIONS

- Ideal for front desk/reception and retrofit
- Hard to wire locations, or for easier pushbutton placement
- Can be used with maglocks, electric strikes, keypads, gate operators, door operators and more

SPECIFICATIONS

- CE Certified
- RoHS Compliant
- Operating Temperature: -4°F to +140°F [-20°C to +60°C]

DIMENSIONS

- Receiver dimensions: 2-1/2" L x 1-1/4" W x 3/4" D

ELECTRICAL

- Receiver operates on 12 or 24 VAC or VDC
- Maximum current draw 50mA
- Relay SPDT contact rated 1A at 30 VDC or 120 VAC
- Working frequency is 433.92 MHz

ACCESSORIES


- Additional transmitter (RT-1T)
- Additional transmitter with wire lead (RT-1TW)
- Extra three channel receiver (RT-3R)

Model	Description
RT-1	One Receiver and Two Wireless Transmitters
RT-1T	Additional Transmitter for RT-1 Kit
RT-1TW	Additional Transmitter with Wire Leads (Allows Expansion of RT-1 and RT-3)
RT-3	Three Receivers and One Wireless Transmitter
RT-3R	Additional Receiver (Allows Expansion of RT-1)



RT-3

One transmitter can operate three separate doors by utilizing one button per door.

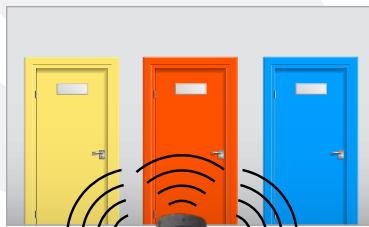

RT-1

Two transmitters operate the same single door.



AC-019-0618

ALARMCONTROLS