

LNP-0500 Series

5-Port Industrial PoE+ Unmanaged Ethernet Switch, with
4*10/100Tx (PSE: 30W/Port) + 1*10/100Tx



Features


- ▶ 4-Port IEEE 802.3at Compliant PoE+ (30W/Port)
- ▶ 1-Port 10/100Tx Fast Ethernet
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 2K MAC Address Table
- ▶ Network Broadcast Storm Protection
- ▶ EFT Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 48~55VDC
- ▶ Built-in 1 relay output for Port Break Alarm
- ▶ IP30 Rugged Aluminum Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range – STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNP-0500 series is an industrial PoE+ unmanaged Ethernet switch featuring 4*10/100Tx PoE+ ports and 1*10/100Tx fast Ethernet RJ45 port. Each power over Ethernet (PoE+) port supports an IEEE 802.3at high power PoE+ output up to 30W per port, making it ideal for applications that demand a PoE+ power source.

The LNP-0500 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). The series also provides Ethernet connectivity with PoE+ functions for outdoor or harsh industrial application environments, such as, security surveillance, ITS-traffic monitoring systems, facility management for power/utility, water wastewater treatment plants, and lastly, automated production lines in factory automation.

DIMENSIONS

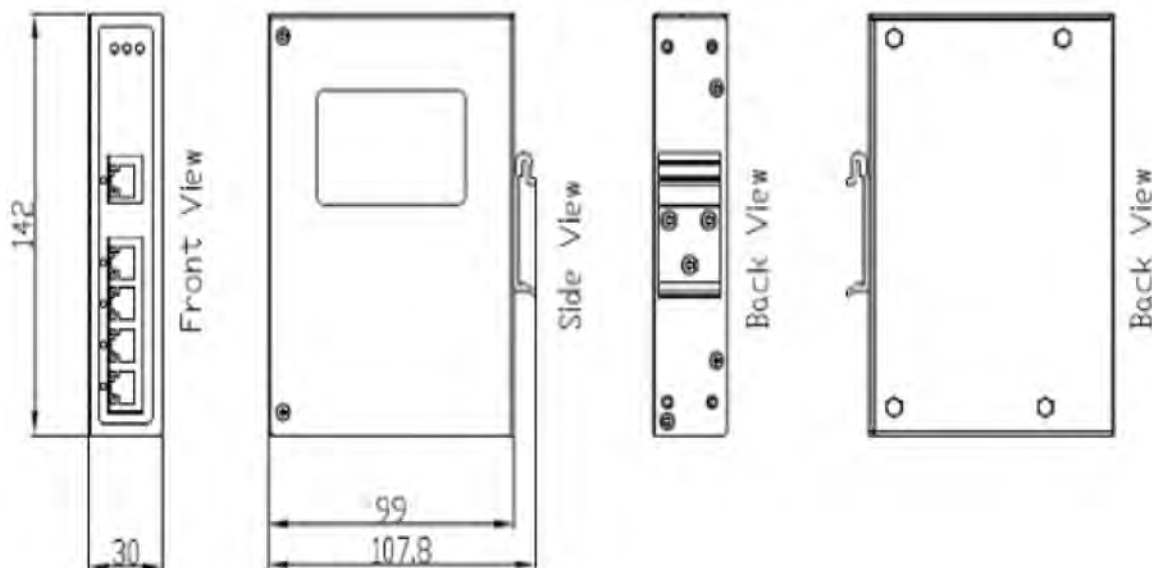

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseT Fast Ethernet IEEE 802.3x Flow Control and Back-Pressure IEEE 802.3at PoE (Power-over-Ethernet)
Processing Type	Store-and-Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x back pressure flow control
Switch Properties	
Switch Architecture	Back-Plane (Switching Fabric): 1.0Gbps
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port
Jumbo Frame	-
MAC Table Size	2K
Port Interface	
Ethernet Port	10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection 4*10/100Tx (PoE+) + 1*10/100Tx
PoE Port Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, MDI-X Alternative A)
Mechanical Characteristics	
Housing	Metal IP30 rated
Dimensions	30 x 142 x 99 mm
Weight	Unit: 1.1 lbs Shipping: 1.45 lbs
Mounting	DIN-Rail; Wall-mount (Optional)

Power Requirement	
Input Voltage	48~55VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Present
Overload Current Protection	Present
PoE Power Output	25W @ 48VDC (per PoE port) 30W @ 51~55VDC (per PoE port)
Power Consumption	110 Watts @ 48VDC 130 Watts @ 51~55VDC
Environmental Limits	
Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Storage Temperature	-40°~85°C
Ambient Relative Humidity	5 to 95%, (Non-condensing)
Regulatory Approvals	
EMI	FCC Class A
EMS	EN6100-4-2,3,4,5,6,8 EN6100-6-2,4
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 508, UL Class 1 Division 2, ISA 12.12.01
Warranty	5 Years

ORDERING INFO

LNP-0500	5-Port Industrial PoE+ Unmanaged Ethernet Switch, w/4*10/100Tx (30W/Port) + 1*10/100Tx
LNP-0500-T	5-Port Industrial PoE+ Unmanaged Ethernet Switch, w/4*10/100Tx (30W/Port) + 1*10/100Tx, EOT: -40°~75°C

Optional Accessories

DR-75-48	75W Industrial Single Output DIN-Rail Power Supply – 48VDC / 1.6 Amps
SDR-120-48	120W Industrial Slim High-Efficiency Single Output DIN-Rail Power Supply – 48VDC / 2.5 Amps
SDR-240-48	240W Industrial Slim High-Efficiency Single Output DIN-Rail Power Supply – 48VDC / 5.0 Amps
MDR-60-48	60W Industrial Slim Single Output DIN-Rail Power Supply – 48VDC / 1.25 Amps
DIN-RAIL-10	35mm Steel DIN-Rail Track – 10 Inches Long
DIN-RACK-2U	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height