

Optolinx FCU-3002A-SFP-DR

Gigabit Ethernet 10/100/1000BaseT to 100/1000BaseX (SFP) Media Converter




Features


- ▶ Complies with IEEE 802.3/u/ab 10/100/1000BaseT
- ▶ Complies with IEEE 802.3z 1000BaseX
- ▶ Dual Rate Fiber
- ▶ Supports Jumbo Frame (9K bytes)
- ▶ Store-and-Forward Switching Mechanism
- ▶ Auto-Crossover for MDI/MDIX in TP Port
- ▶ Auto-Negotiation in TP Port
- ▶ Supports 1 SFP Slot
- ▶ Supports Flow Control
- ▶ Supports Link Alarm
- ▶ Supports Auto & Force Mode Configuration
- ▶ 5-Year Warranty




▶ Specifications

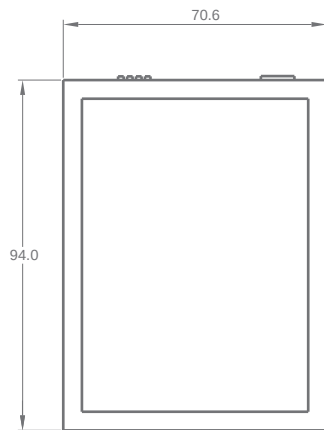

Top View

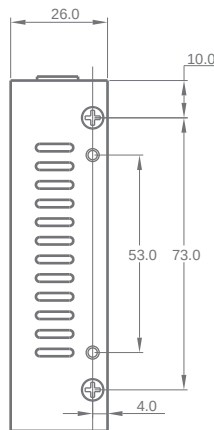

Side View



Panel View



Rear View

► Specifications

Standard

IEEE 802.3 10BaseT
IEEE 802.3u 100BaseTX/FX
IEEE 802.3ab 1000BaseT
IEEE 802.3z 1000BaseX
IEEE 802.3x Flow Control

Interface

10/100/1000BaseT: 1 x RJ45 Port
100/1000BaseX: 1 x SFP Slot

Wavelength

*See SFP Specifications

Typical Distance

*See SFP Specifications

Minimum TX Power

*See SFP Specifications

Maximum TX Power

*See SFP Specifications

Sensitivity

*See SFP Specifications

Link Budget

*See SFP Specifications

LED

Power, FDX, Status, Speed, FO Link/ACT, TX Link/ACT

MAC Address Table

1 K

Memory Buffer

32 K

Forward/Filter Rate

10M: 14,880/14,880pps
100M: 148,800/148,800pps
1000M: 1,488,000/1,488,000pps

Power Requirement

AC Input: 100VAC~240VAC
Frequency Range: 50, 60 Hz
DC output: 5V, 2A

Power Consumption

2.2 Watts

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 71 x 94 x 26 mm (2.80 x 3.70 x 1.02 inches)
Weight: 0.6 Kg (1.3 lbs)
Installation: DIN-Rail/Wall Mountable

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-3002A-SFP-DR

Gigabit Ethernet 10/100/1000BaseT to 100/1000BaseX (SFP) Media Converter, Standalone Module ***

*** SFP MODULES SOLD SEPARATELY ***

Optional Accessories

SFP-100M

100Mbps SFP Module, Multi-Mode, 2Km

SFP-100S20

100Mbps SFP Module, Single-Mode, 20Km

SFP-M

Gigabit SFP Module, Multi-Mode, 550m

SFP-S10

Gigabit SFP Module, Single-Mode, 10Km

FCU-BK

Mounting Brackets for FCU Modules

DIN-RAIL-KIT

DIN-Rail Mounting Kit

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>


www.antaira.com