

# LNP-1002G-10G-SFP

10-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch – 8\*10/100/1000Tx (PSE: 30W/Port) and 2\*10G SFP+ Slots



## Features

- ▶ Supports 8\*10/100/1000Tx Ethernet Ports (w/8\*PSE: 30W/Port) and 2\*10G SFP+ Fiber Slots
- ▶ IEEE 802.3at PoE+ Compliant (support 802.3af PoE)
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 16K MAC Address Table
- ▶ 9,216 bytes Jumbo Frame Support
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 48~55VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range: -40°C to 60°C
- ▶ 5-Year Warranty


## INTRODUCTION

Antaira Technologies new compact DIN-Rail industrial gigabit PoE+ unmanaged switch, the **LNP-1002G-10G-SFP**, features 8\*10/100/1000Tx Ethernet ports that support IEEE 802.3at high power PoE (30W/Port), and two 10G SFP+ slots for long-distance fiber connections. The device is designed with high EFT and ESD protection and supports extreme operating temperature environments (-40° to 60°C).

The LNP-1002G-10G-SFP provides extensive connectivity solutions for the continuously growing demand for bandwidth to support applications under a variety of outdoor or harsh environments, such as security surveillance, traffic monitoring, and campus or sport venue-wide network infrastructure.

## DIMENSIONS

Dimensions (unit = mm)

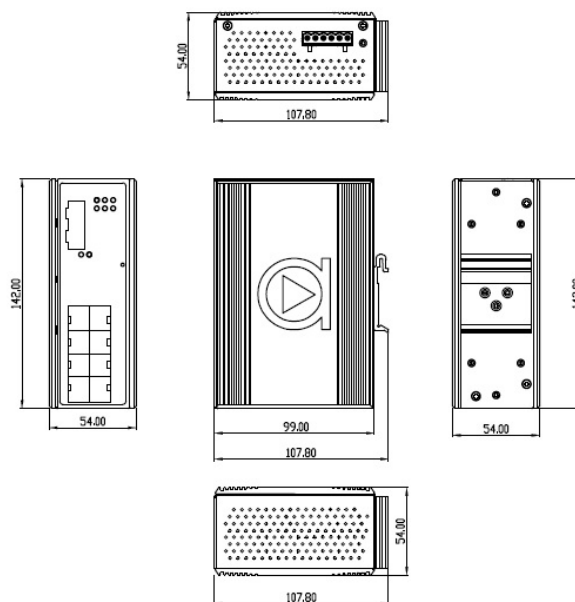

## SPECIFICATIONS

|                                    |  |
|------------------------------------|--|
| <b>Technology</b>                  |  |
| <b>Standards</b>                   | IEEE 802.3 10BaseTx Ethernet                                 |
|                                    | IEEE 802.3u 100BaseTx Fast Ethernet                          |
|                                    | IEEE 802.3ab 1000BaseTx                                      |
|                                    | IEEE 802.3z 1000Base-X Gigabit Fiber                         |
|                                    | IEEE 802.3ae 10 Gigabit Ethernet                             |
| <b>Processing Type</b>             | Store and Forward  |
|                                    | CSMA/CD  |
| <b>Flow Control</b>                | IEEE 802.3x back pressure flow control                       |
| <b>Switch Properties</b>           |  |
| <b>Switch Architecture</b>         | Back-Plane (Switching Fabric): Non-Blocking                  |
| <b>Transfer Rate</b>               | 14,880pps for Ethernet Port                                  |
|                                    | 148,800pps for Fast Ethernet Port                            |
|                                    | 1,488,000pps for Gigabit Ethernet Port                       |
|                                    | 14,880,000pps for 10 Gigabit Ethernet Port                   |
| <b>Memory Buffer</b>               | 12 Mbytes  |
| <b>Jumbo Frame</b>                 | 9216 bytes   |
| <b>MAC Table Size</b>              | 16K  |
| <b>Interface</b>                   |  |
| <b>Ethernet Port</b>               | 8*RJ45 Ports w/10/100/1000Tx (PSE: 30W/Port)                 |
| <b>Fiber Port</b>                  | 2* 10GbE SFP+ slots  |
| <b>PoE Pin out</b>                 | V+, V+, V-, V- for pins 1,2,3,6 (Endspan, MDI Alternative A) |
| <b>Network Cable</b>               | 10Base Tx: 2-pair UTP/STP Cat. 3,4,5                         |
|                                    | 100Base Tx: 2-pair UTP/STP Cat. 5                            |
|                                    | 1000Base Tx: 2-pair UTP/STP Cat. 5/5E                        |
| <b>Power Requirements</b>          |  |
| <b>Input Voltage</b>               | 48~55VDC, Redundant Input                                    |
| <b>Overload Current Protection</b> | Present (Slow-Blown Fuse)                                    |
| <b>Connection</b>                  | 1 removable 6-contact terminal block                         |
| <b>Reverse Polarity Protection</b> | Yes  |
| <b>Power Consumption</b>           | 16 Watts for system  |
| <b>Max. PoE Power Budget</b>       | 240 Watts  |
| <b>PoE Power Output</b>            | 30 Watts max per PoE port                                    |
| <b>Relay Contact</b>               | 24VDC, 1A resistive  |

|                                   |  |
|-----------------------------------|--|
| <b>Mechanical Characteristics</b> |  |
| <b>Housing</b>                    | Metal, IP30 protection                 |
| <b>Dimensions</b>                 | 54 x 99 x 142 mm (W*D*H)               |
| <b>Weight</b>                     | Unit 3.0lbs.: Shipping Weight 3.5 lbs. |
| <b>Mounting</b>                   | DIN-Rail, wall mounting (optional)     |
| <b>Environmental Limits</b>       |  |
| <b>Operating Temperature</b>      | -40°C to 60°C                          |
| <b>Storage Temperature</b>        | -40°C ~ 85°C                           |
| <b>Ambient Relative Humidity</b>  | 5 to 95%, (non-condensing)             |
| <b>Regulatory Approvals</b>       |  |
| <b>EMI</b>                        | FCC Class A                            |
| <b>EMS</b>                        | IEC61000-4-2,3,4,5,6,8                 |
| <b>Free Fall</b>                  | IEC60068-2-32                          |
| <b>Shock</b>                      | IEC60068-2-27                          |
| <b>Vibration</b>                  | IEC60068-2-6                           |
| <b>Green</b>                      | RoHS Compliant                         |
| <b>Certifications</b>             | FCC, CE                                |
| <b>Warranty</b>                   | 5 Years                                |

## ORDERING INFO

|                          |  |
|--------------------------|--|
| <b>LNP-1002G-10G-SFP</b> | 10-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch, w/ 8*10/100/1000Tx (PSE: 30W/Port) and 2*10G SFP+ Slots |
|--------------------------|--|

|                             |  |
|-----------------------------|--|
| <b>Optional Accessories</b> |  |
| <b>DR-120-48</b>            | 120W Industrial DIN Rail Power Supply, 48VDC                                 |
| <b>SDR-120-48</b>           | 120W Industrial Single Output DIN Rail Power Supply, 48VDC                   |
| <b>SDR-240-48</b>           | 240W Industrial Single Output DIN Rail Power Supply with PFC Function, 48VDC |
| <b>SDR-480-48</b>           | 480W Industrial Single Output DIN Rail Power Supply, 48VDC                   |