


HN-PTT Push-to-talk Microphone


- Superior voice reproduction
- User-friendly operation
- Durable construction
- Dynamic transduce
- Remote switching contact
- Optional component of X-DCS2000/EN and X-NPMR



Response Curve

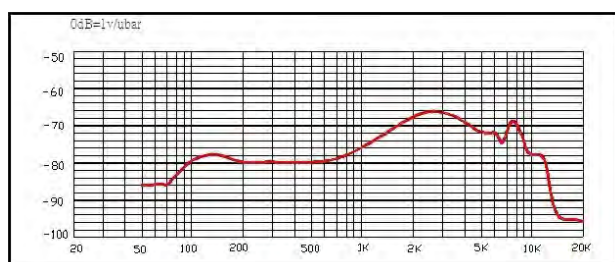

Test Range

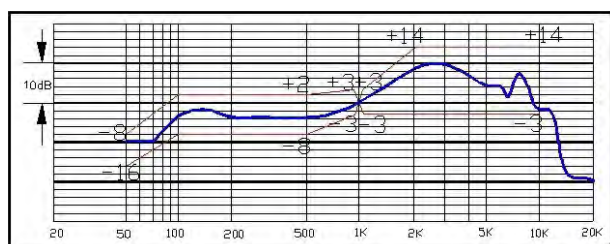

Technical Specifications

Parameter	Value
Type	Dynamic
Net Weight	30g
Impedance	500Ω±30% at 1KHz
Pattern	Hyper cardioid
Sensitivity	0°-77dB±3dB (0dB=1v/ubar 1KHz)
Frequency Response	50Hz~15KHz See response curve

Honeywell Audiovisuals

No. 257, Junye Road
Guangzhou GETDD East
510530 China

Tel: +86 20 2839 9600
Fax: +86 20 2820 8706
www.honeywellav.com

1013704022_EN1.0

Mar 2014

© 2014 Honeywell International Inc.

Honeywell