



## PT/SPT SERIES PHOTOCONTROL

### THERMAL, NON METALLIC HOUSING, WIRE-IN

#### KEY FEATURES

- Fixed or adjustable swivel base
- Heavy-duty thermal bi-metal switch
- UL | CSA Listed
- 30 - 45 second time delay
- 2000 watt rating
- Fail mode is ON

TE Connectivity's (TE) PT/SPT Series offers a durable control with an optional swivel base allowing maximum mobility for installation.

The PT/SPT Series controls combine the superior performance of the AT Series with an economical, yet highly durable, polycarbonate housing.

Controls include a heavy-duty bi-metal switch that provides a 30 - 45 second time delay. This virtually eliminates unwanted lamp cycling that could be caused by lightning, car headlights, or other sudden changes in ambient light level.

Although the Turn-ON level is pre-set at the factory, each PT and SPT control is furnished with an adjustable slide bar that allows field adjustment to satisfy specific needs. The SPT is also equipped with an adjustable swivel base to provide installation flexibility.

**Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.**




TE's photocontrols can be used to safely control luminaries with incandescent, HID, LED, or compact fluorescent lamps.

| TECHNICAL INFORMATION |                                                           |
|-----------------------|-----------------------------------------------------------|
| Switch                | SPST thermal bi-metallic, Exceeds 5,000 ON/OFF operations |
| Fail Mode             | ON (contacts normally closed)                             |
| Housing               | Polycarbonate with UV stabilized window                   |
| Lead Wires            | 6", #14 AWG, rated 105°C (all other models)               |
| Nipple                | 1/2" pipe                                                 |
| Nut                   | 1/2" pipe, die-cast                                       |

| SPECIFICATION |                                                   |
|---------------|---------------------------------------------------|
| Physical      | Enclosure: designed to meet UL 773A               |
|               | Power consumption: less than 0.9 watts at 120 VAC |
| Temperature   | Minus 40°C to plus 65°C at 96% RH                 |
| Load Rating   | 2000 Watt Tungsten<br>1900 VA ballast             |
| Light Sensor  | Cadmium Sulfide Cell                              |

Figures A & B:  
Illustrates front and side view of PT Model

Figures C & D:  
Illustrates front and side view of SPT Model

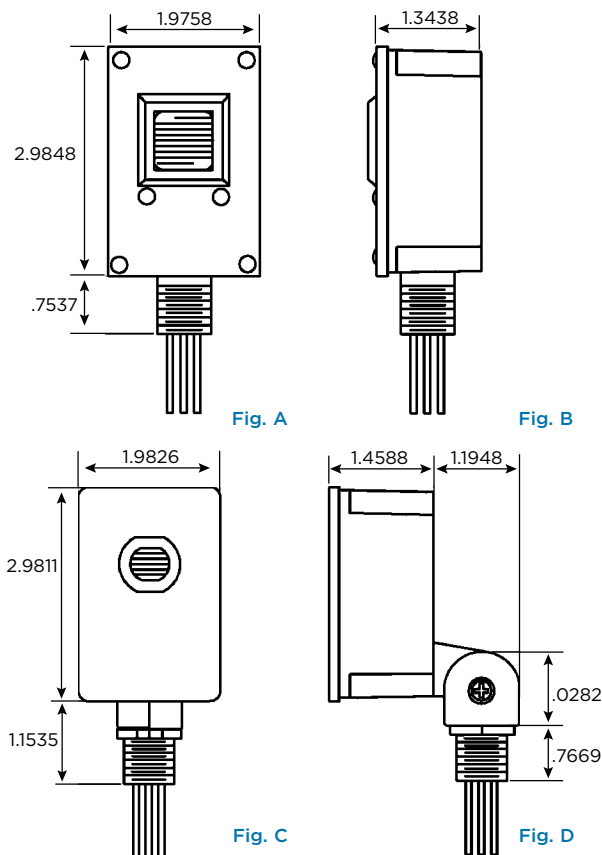

| PRODUCT SELECTION INFORMATION |        |                 |               |                              |                          |              |              |
|-------------------------------|--------|-----------------|---------------|------------------------------|--------------------------|--------------|--------------|
| Description                   | Base   | Rated Volts     | Range (Volts) | Load Rating Tungsten (Watts) | Load Rating Ballast (VA) | Turn ON (Fc) | OFF/ON Ratio |
| PT-15                         | Fixed  | 120             | 105 - 130     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| PT-168                        | Fixed  | 208/240/277     | 185 - 305     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| PT-20                         | Fixed  | 120/208/240/277 | 105 - 305     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| PT-347**                      | Fixed  | 347             | 310 - 380     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| SPT-15                        | Swivel | 120             | 105 - 130     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| SPT-168                       | Swivel | 208/240/277     | 185 - 305     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| SPT-19*                       | Swivel | 480             | 420 - 530     | 2000                         | 1900                     | 1.5          | 4 : 1        |
| SPT-347**                     | Swivel | 347             | 310 - 380     | 2000                         | 1900                     | 1.5          | 4 : 1        |

Note: 6" Lead Wires

\* Not UL or CSA Listed

\*\* CSA Listed Only



te.com/energy

©2008, 2012, 2014 TE Connectivity Ltd. family of companies. All Rights Reserved. 9-1773453-4 E335 10/2014

TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

#### FOR MORE INFORMATION: TE Technical Support Centers

USA: +1 800 327 6996  
 France: +33 380 583 200  
 UK: +44 0870 870 7500  
 Germany: +49 896 089 903  
 Spain: +34 916 630 400  
 Benelux: +32 16 351 731  
 Canada: +1 (905) 475-6222  
 Mexico: +52 (0) 55-1106-0800  
 Latin/S. America: +54 (0) 11-4733-2200  
 China: +86 (0) 400-820-6015