


VITALink®

14 AWG Stranded 2/C Non-Shielded Circuit Integrity Cable

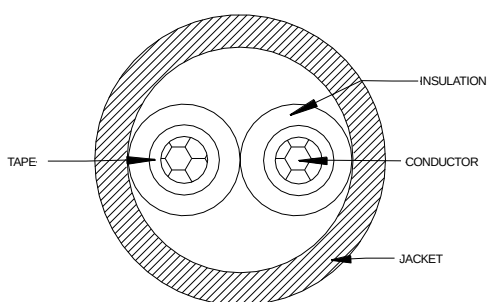

1. Construction:

- 1.1. Conductors: 14 AWG (2.1 mm²) Stranded Bare Copper, 0.071" (1.80 mm) Nominal Diameter
- 1.2. Tape: Flame Retardant Tape
- 1.3. Insulation: Low Smoke Zero Halogen Thermoset Fire-Roc® Insulation 0.150" (3.81 mm) Nominal Diameter & 0.029" (0.73 mm) Nominal Wall Thickness
- 1.4. Color Code: Red, Black
- 1.5. Cable Assembly: Cable (2) Conductors 5" (127 mm) Nominal LHL
- 1.6. Jacket: Non Halogen Flame Retardant Polyolefin Compound, Nominal Overall Diameter, 0.368", (9.34 mm) Nominal Wall Thickness 0.034" (0.86 mm) Color: RED

1.7. Jacket Print:

COMTRAN LSZH VITALink® FPLR-CI-LS CL3R-CI-LS 2/C 14AWG 105C SUN RES WET FRR-2HR FOR USE IN FHIT SYSTEM 40A & FHIT7 SYSTEM 40A MAX VOLTAGE 72V ULC-S139 W/HOSE STREAM OR CSA FAS105 LL14444 PN36340 (MMYY) 000002 (01-12345)

NOTE: MMY is 4 Digit Month/Year
Sequential Footage Markings Every Two Feet

2. Compliance:

- 2.1. (UL) Listed Type FPLR-CI-LS
- 2.2. (UL) Listed CL3R-CI-LS
- 2.3. CSA Listed FAS 105
- 2.4. UL Subject 1424 Power Limited Fire Alarm Circuits; 300V/105°C Classified
- 2.5. UL Subject 13 Power Limited Circuit Cables; 300V/105°C Classified
- 2.6. ANSI/UL 2196 2-Hour Fire Rating for use in FHIT System 40A
- 2.7. CAN/ULC-S139 2-Hour Fire Rating with Hose Stream for use in FHIT7 System 40A
- 2.8. NFPA 70 & 72
- 2.9. NFPA 130
- 2.10. NFPA 502
- 2.11. California State Fire Marshal Approved
- 2.12. NYC Electrical Advisory Board #54502, April 2017
- 2.13. RoHS Compliant

3. Physical Characteristics:

- 3.1. Nominal Conductor DCR @ 68F (20 °C): 2.58Ω / 1000 Ft.
- 3.2. Nominal Weight per 1000 FT: 65 Lbs. (29.4 kg)
- 3.3. Min Bend Radius: 3" (76.2 mm)
- 3.4. Maximum Pull Tension – Straight runs: 66 Lbs. /Ft. (30 kg/Ft.)
- 3.5. Passes Cold Bend Test @ -20C

TITLE:		DESCRIPTION:	COMTRAN 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		 COMTRAN Innovative Systems. Engineered Solutions.  A Marmon Wire & Cable/ Berkshire Hathaway Company	
DS36340		14 AWG Stranded 2 Conductor VITALink® Non-Shielded Circuit Integrity Cable				
Rev	Date	Detail	Eng.	App.		
09	02/27/19	Add regulatory approvals	PB	WC		
08	01/29/19	Change logo and basic corrections	SM	PB		
07	10/31/18	Add LL# to print	PB	WC	ECN 18-118	
06	05/24/18	FAS 90 to 105	PB	WC	ECN 18-067	
05	10/5/17	Update to legend	PB	RN		
04	08/09/17	Convert to DS Spec	PB	RN		
03	05/10/17	Update print and compliance sections	PB	RN		
02	08/16/16	Finalize Print	PB	RN		
01	08/01/16	First Release	PB	RN		

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document