


DESCRIPTION

The U-43S is an AUX module to be used in conjunction with the 900 series and AX-1000 amplifier. It has a voice-activated muting control output.

SPECIFICATIONS

Power Source	24 VDC
Current Consumption	Less than 15 mA
Input Sensitivity (Rated Output 100 mV)	100 – 3,600 mV (adjustable)
Low Cut Filter (100 Hz)	-5 – -15 dB
High Cut Filter (10 kHz)	-7 – -13 dB
Noise Output (20 Hz – 20 kHz BPF)	Less than 10 μ V
Distortion	Less than 0.05 %
Frequency Response	20 Hz – 20 kHz
Signal-Activated Muting	6 – 15 mV
Input Connector	3P terminal block
Output Connector	6P card edge-connector
Dimensions	35 (W) $\times$ 78 (H) $\times$ 88 (D) mm
Weight	50 g

APPEARANCE

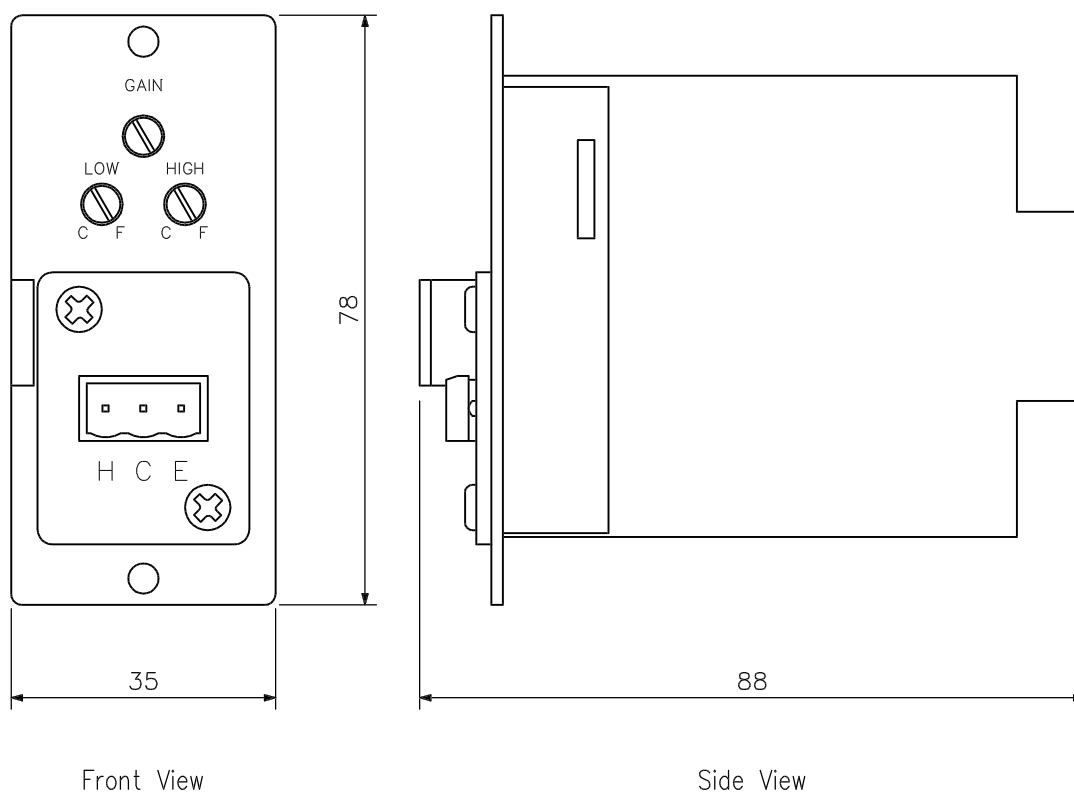

CONNECTION	H: Hot C: Common E: Earth
------------	---------------------------------

UNIT:mm SCALE:1/1