


VITALink®

18 AWG 4-Pair Shielded Ethernet Cable – Patent Pending

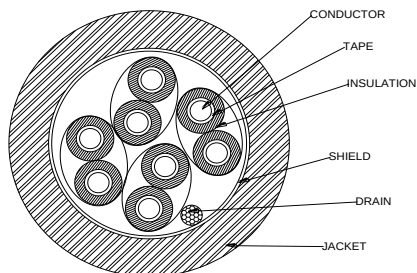

1. Construction:

- 1.1. Conductors: 18 AWG Solid Bare Copper, 0.040" Nominal Diameter (1.01 mm)
- 1.2. Tape: Flame Retardant Tape
- 1.3. Insulation: LSZH Thermoset Fire-Roc™, 0.110" (2.794 mm) Nominal Diameter, 0.025" (0.635 mm) Nominal Wall Thickness
- 1.4. Pairs: Conductors Twisted to Varying Lays
- 1.5. Colors: Red & Black Printed
- 1.6. Cable: Cable 4 Pairs
- 1.7. Drain: 18 AWG (0.82 mm²) Stranded Bare Copper
- 1.8. Shield: 0.005" (0.12 mm) Copper/Polyester Shield, 25% Minimum Overlap
- 1.9. Jacket: Red Non-Halogen Flame Retardant Polyolefin, 0.510" (12.954 mm) Nominal Diameter, Nominal Wall Thickness, 0.042" (1.067 mm)

1.10. Jacket Print:

COMTRAN LSZH VITALink® c(UL)us CMR-LS or (UL) FPLR-LS CL3R-LS 4P18 AWG SHLD 105C FT4 SUN RES WET or FAS105 ST1 FT4 LL14444 FRR-2HR FOR USE IN FHIT & FHIT7 SYSTEMS 40A MAX VOLTAGE 72V PN36513 (MM/YY) 000002 (01-12345) PATENT PENDING

MMYY is 4 Digit Month/Year
(01-12345) = Traceability Code
000002 FT – Sequential Footage every 2 feet

2. Compliance:

- 2.1. c(UL)us CMR-LS
- 2.2. (UL) Listed Type FPLR-LS
- 2.3. (UL) Listed CL3R-LS
- 2.4. CSA Listed FAS105 ST1 FT4
- 2.5. UL Subject 444 Communication Cables; 300V/105°C Classified
- 2.6. UL Subject 1424 Power Limited Fire Alarm Circuits; 300V/105°C Classified
- 2.7. UL Subject 13 Power Limited Circuit Cables; 300V/105°C Classified
- 2.8. ANSI/UL 2196 2-Hour Fire Rating for use in FHIT System 40A
- 2.9. CAN/ULC-S139 2-Hour Fire Rating with Hose Stream for use in FHIT7 System 40A
- 2.10. NFPA 70 & 72
- 2.11. NFPA 130
- 2.12. California State Fire Marshal Approved
- 2.13. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Meets Category 3 Channel Requirements per TIA-568-C.2 throughout UL2196 Flame and Hose Stream Testing
- 3.2. Nominal DC Resistance of Conductor: 6.52 Ω/1000'

4. Physical Characteristics:

- 4.1. Cable Weight: 126 Lbs./1000 Ft.
- 4.2. Min Bend Radius: 4"
- 4.3. Maximum Pull Tension – Straight Runs: 104 Lbs./Ft.

TITLE:		DESCRIPTION	COMTRAN 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		 COMTRAN Innovative Systems. Engineered Solutions.  A Marmon Wire & Cable/Berkshire Hathaway Company	
DS36513		18AWG 4-Pair Shielded VITALink® Ethernet Cable --- Patent Pending				
Rev	Date	Detail	Eng.	App.		
5	01/29/19	Add metric measurements/Patent Pending	PB	WC		
4	01/11/19	Rebranding	PB	WC		
3	12/3/18	Change print,				
2	10/05/18	Updated Compliance Section	WC	RN		
1	08/29/18	Initial specification	PB	WC	S-2097-1/CD0890	

Comtran Cable LLC Reserves the right to change the information above without prior notification. Comtran Cable LLC assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document