



DB9 Male to DB9 Female, 6 ft.
Model 9PAMF6

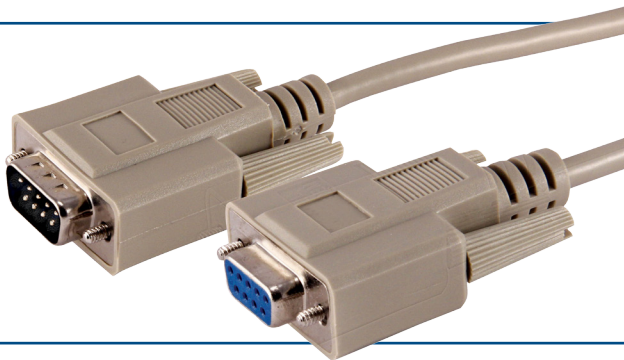

PRODUCT FEATURES

- + Fully molded backshell with strain relief for added protection
- + 28 AWG stranded conductors for flexibility
- + Thumbscrews for tool-less termination

MECHANICAL DIAGRAM

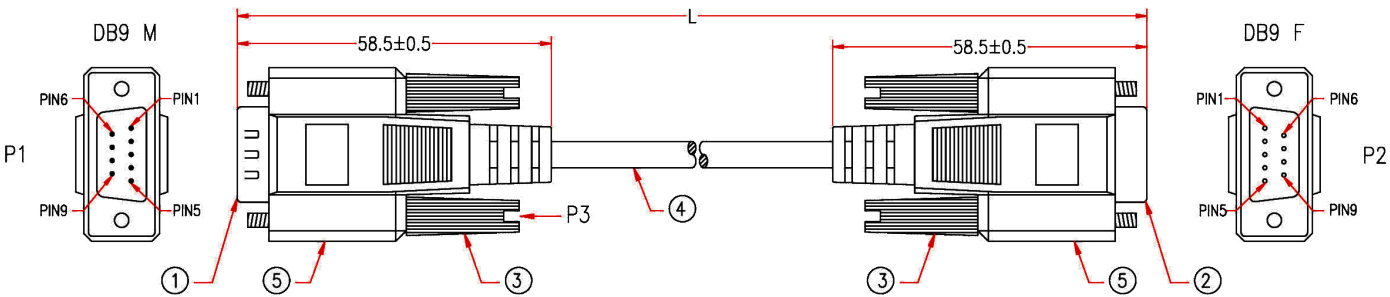

P1	1006	P2	
1	1	1	BROWN
2	2	2	RED
3	3	3	ORANGE
4	4	4	YELLOW
5	5	5	GREEN
6	6	6	BLUE
7	7	7	PURPLE
8	8	8	GREY
9	9	9	BLACK
SHIELD		SHIELD	

*NOTE: All relevant materials are complied with RoHS directive

5	BLACK PVC TUBE $\varnothing 3.0 \times 22\text{mm}$
	ALUMINUM FOIL 33*65mm
	MOLDED PE COLOR TRANSPARENT
	MOLDED PVC BEIGE
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR

All product specifications are subject to change without notice.
9PAMF6_4816ds