



- Deep bass with less compression
- Front access, high quality multi-tap transformer with 8-ohm bypass
- Horn-loaded for clear sound in any location
- For pendant application use with Pendant Housing KPH-525



IC-525-T FULL-RANGE 5.25" 2-WAY

FREQUENCY RESPONSE¹ (+/- 4 dB)	65 Hz - 20 kHz
POWER HANDLING²	65 watts RMS (16.5V) 260 watts peak*
MAXIMUM SPL³	104 dB (110 dB)
SENSITIVITY⁴	89 dB
NOMINAL IMPEDENCE	8 ohm*
TWEETER	1" (2.54cm) titanium diaphragm compression driver
HIGH FREQUENCY HORN	105° Tractrix® Horn
WOOFER	5.25" (12.7cm) woofer
TAP SETTINGS	3.8 watts, 7.5 watts, 15 watts, 30 watts @ 70V 7.5 watts, 15 watts, 30 watts @ 100V
ENCLOSURE TYPE	Bass-reflex via Tractrix® port
WEIGHT	8.25 lbs. (3.74kg)
CUTOUT DIMENSIONS	9.125" (23.2cm) diameter
MOUNTING DEPTH	8.31" (21.12cm)
OVERALL DEPTH	8.5" (21.59cm)
OVERALL WIDTH	10.75" (27.3cm) diameter
THRU HOLE WIDTH	9" (22.86cm)
FINISHES	Black/White
WIRE GAUGE ACCOMMODATED	14 AWG
PRE-CONSTRUCTION MUD RING	1010413

SHIPPING QUANTITY: 1 Pair

SHIPPING WEIGHT: 25.8 lbs

PART NUMBER

1008720 (Black)


1007626 (White)

NOTES:

KPH-525, KPH-650, KPH-800 PENDANT HOUSINGS

When overhead sound distribution is a challenge due to either a high ceiling or a lack of a suspended ceiling, Klipsch Pendant Housings combine with Klipsch In-Ceiling speakers for an aesthetically pleasing, great sounding solution.

- Aluminum Pendant Housing in Black, White or Paintable for customization
- Perfect for high-ceiling structures or areas with no suspended ceiling for direct, overhead distributed sound
- Includes the necessary mounting hardware for typical suspended installation scenarios

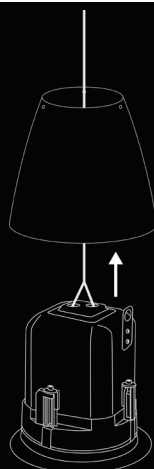

IC-650-T FULL RANGE 6.5" 2-WAY

FREQUENCY RESPONSE¹ (+/- 4 dB)	50 Hz - 20 kHz
POWER HANDLING²	80 watts RMS (18.8V) 320 watts peak*
MAXIMUM SPL³	106 dB (112 dB)
SENSITIVITY⁴	90 dB
NOMINAL IMPEDENCE	7.5 ohm*
TWEETER	1" (2.54cm) titanium diaphragm compression driver
HIGH FREQUENCY HORN	105° Tractrix® Horn
WOOFER	6.5" (16.51cm) woofer
TAP SETTINGS	7.5 watts, 15 watts, 30 watts, 60 watts @ 70V 15 watts, 30 watts, 60 watts @ 100V
ENCLOSURE TYPE	Bass-reflex via Tractrix® port
WEIGHT	11.25 lbs. (71.44kg)
CUTOUT DIMENSIONS	10.13" (23.72cm) diameter
MOUNTING DEPTH	10.63" (27cm)
OVERALL DEPTH	10.94" (27.79cm)
OVERALL WIDTH	10.75" (27.3cm) diameter
THRU HOLE WIDTH	10" (25.4cm)
FINISHES	Black/White
WIRE GAUGE ACCOMMODATED	14 AWG
PRE-CONSTRUCTION MUD RING	1010414

SHIPPING QUANTITY: 1 Pair

SHIPPING WEIGHT: 31.9 lbs

PART NUMBER

097149000001 (Black)

097096000001 (White)

NOTES:



- Deep bass with less compression
- Front access, high quality multi-tap transformer with 8-ohm bypass
- Horn-loaded for clear sound in any location
- For pendant application use with Pendant Housing KPH-650

