


Data sheet | Item number: 870-405

Push-in type jumper bar; insulated; 5-way; Nominal current 18 A; light gray

www.wago.com/870-405

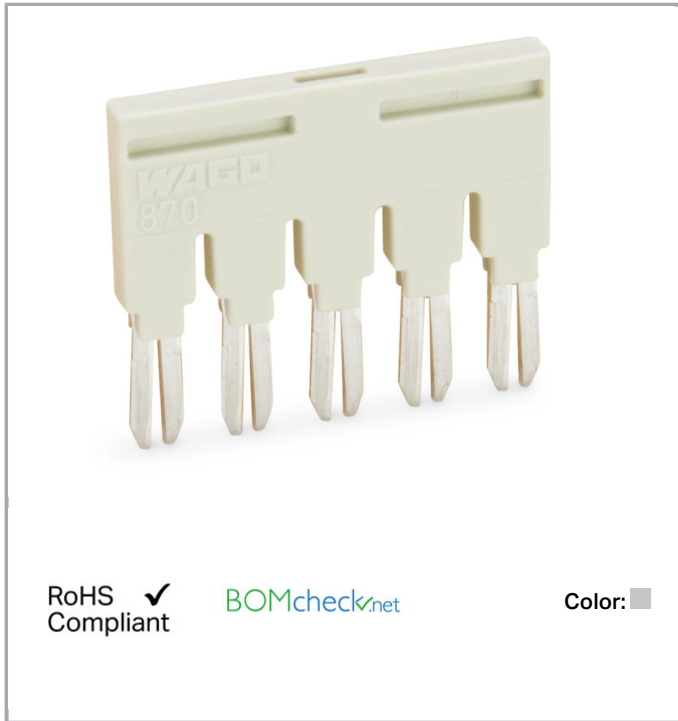

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

Geometrical Data

Width	24 mm / 0.945 inch
Depth	2,5 mm / 0.098 inch

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Material Data

Color	light gray
Fire load	0.025 MJ
Weight	2.1 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918508162
Customs tariff number	85366990990

Counterpart

Downloads

Documentation

Bid Text

870-405 GAEB X81 - Datei	Feb 19, 2019	xml 2.6 kB	Download
870-405 doc - Datei	Jan 4, 2018	doc 24.1 kB	Download

CAD/CAE-Data

CAD data

2D/3D Models 870-405	URL	Download
----------------------	-----	--------------------------

CAE data

WSCAD Universe 870-405	URL	Download
------------------------	-----	--------------------------


Installation Notes

Jumpered

Subject to changes. Please also observe the further product documentation!


WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

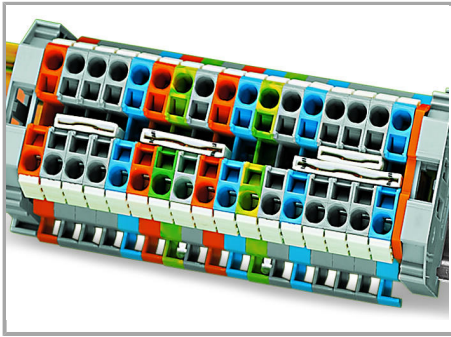

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

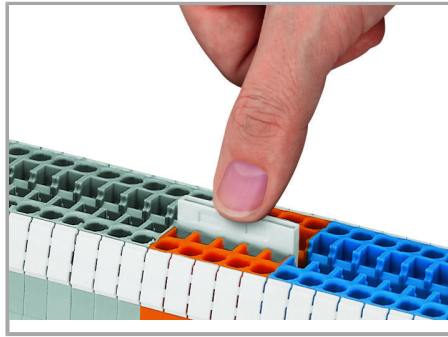

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes. Please also observe the further product documentation!