


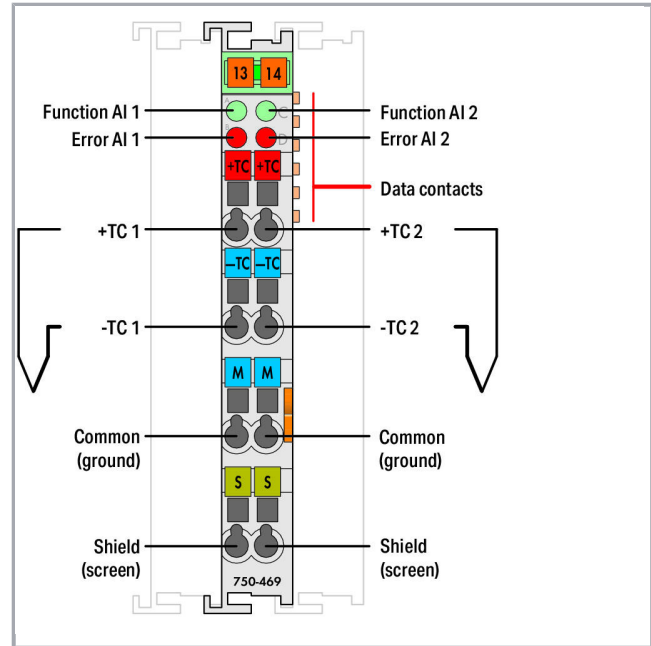

RoHS Compliant



BOMcheck.net

Color:

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

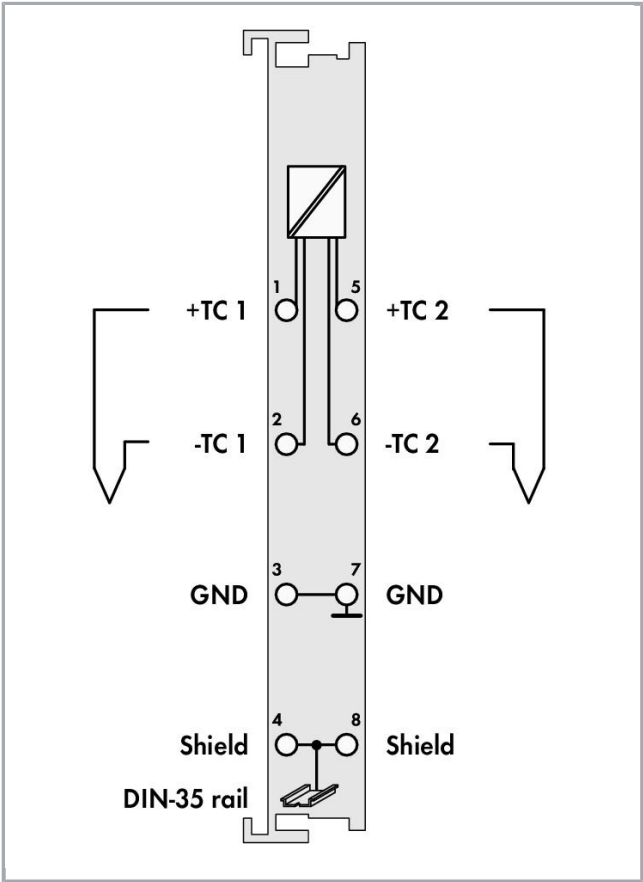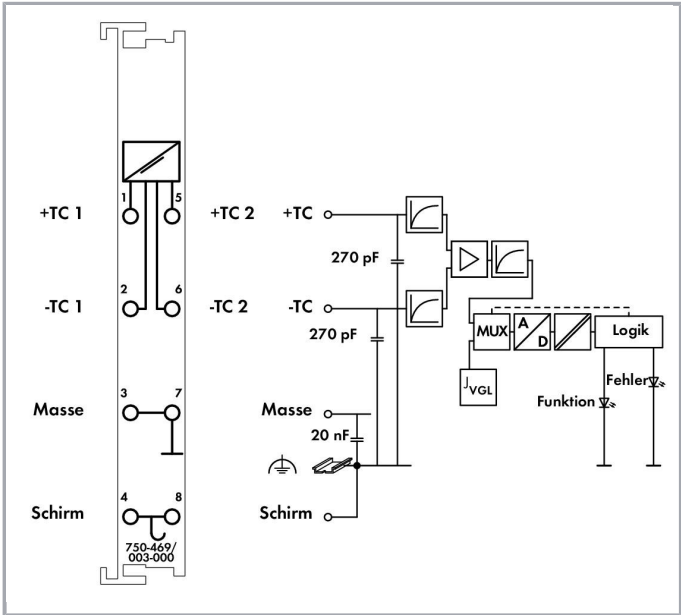

Item description

This analog input module directly connects to two thermocouples. Internal electrical isolation allows operation of grounded sensors.

The module automatically linearizes the entire temperature range.

Cold junction compensation mitigates the clamping unit offset voltage over the 0–55°C operating range.

A line break is indicated by a red LED. A green LED indicates readiness for operation and error-free communication with the coupler.

The shield directly connects to the DIN-rail.

Data  
Technical Data

|                                   |                              |
|-----------------------------------|------------------------------|
| Number of analog inputs           | 2                            |
| Total number of channels (module) | 2                            |
| Signal type                       | Thermocouple<br>Low voltages |
| Signal type (configurable)        | yes                          |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                       |                                                                                 |
|---------------------------------------|---------------------------------------------------------------------------------|
| Sensor connection                     | 2 x (2-wire)                                                                    |
| Data width                            | 2 x 16-bit data; 2 x 8-bit control/status (optional)                            |
| Internal resistance                   | 1000 k $\Omega$                                                                 |
| Resolution (over entire range)        | 0.1 °C                                                                          |
| Conversion time (typ. $\leq$ )        | 320 ms                                                                          |
| Measurement error (25 °C)             | < $\pm 6$ K (voltage input < $\pm 2$ K; cold junction compensation < $\pm 4$ K) |
| Temperature coefficient               | < $\pm 0.2$ K/K                                                                 |
| Sensor types                          | Thermocouple K; Configurable: L, J, E, T, N, U, B, R, S, mV                     |
| Temperature range                     | Sensor-specific                                                                 |
| Cold junction compensation            | at each pair of terminal blocks                                                 |
| Supply voltage (system)               | DC 5 V; via data contacts                                                       |
| Power consumption (5 V system supply) | 65 mA                                                                           |
| Isolation                             | 500 V system/field                                                              |

### Connection data

|                                       |                                              |
|---------------------------------------|----------------------------------------------|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                              |
| Connection type (1)                   | Inputs/Outputs                               |
| Solid conductor                       | 0,08 ... 2,5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor               | 0,08 ... 2,5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inch              |

### Geometrical Data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 12 mm / 0.472 inch   |
| Height                            | 100 mm / 3.937 inch  |
| Depth                             | 69,8 mm / 2.748 inch |
| Depth from upper edge of DIN-rail | 62,6 mm / 2.465 inch |

### Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material Data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate, polyamide 6.6 |
| Fire load          | 0.909 MJ                     |
| Weight             | 38.3 g                       |
| Conformity marking | CE                           |

Subject to changes. Please also observe the further product documentation!

## Environmental Requirements


|                                                                                    |                                       |
|------------------------------------------------------------------------------------|---------------------------------------|
| Surrounding air temperature (operation)                                            | 0 ... 55 °C                           |
| Surrounding air temperature (storage)                                              | -40 ... 85 °C                         |
| Protection type                                                                    | IP20                                  |
| Pollution degree (5)                                                               | 2 per IEC 61131-2                     |
| Operating altitude                                                                 | 0 ... 2000 m                          |
| Mounting position                                                                  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)                                           | 95 %                                  |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                  |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                |
| EMC immunity to interference                                                       | per EN 61000-6-2, marine applications |
| EMC emission of interference                                                       | per EN 61000-6-4, marine applications |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

## Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (Remote I/O) |
| Packaging type        | BOX             |
| Country of origin     | DE              |
| GTIN                  | 4045454393243   |
| Customs tariff number | 85389099990     |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                         | Additional Approval Text | Certificate name                  |
|------------------------------------------------------------------------------------|----------------------------------|--------------------------|-----------------------------------|
|  | ATEX<br>TUEV Nord Cert GmbH      | EN 60079-0               | TÜV 07<br>ATEX<br>554086 X<br>en. |
|  | TUEV Nord<br>TUEV Nord Cert GmbH | IEC 60079-0              | IECEX<br>TUN<br>09.0001 X         |

Subject to changes. Please also observe the further product documentation!



UL  
Underwriters Laboratories Inc. (HAZARDOUS  
LOCATIONS)

UL 121201

E198726  
Sec.1

## Country specific Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name            |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|-----------------------------|
|  | KC<br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>AIM750 |

## Ship Approvals

| Logo                                                                               | Approval                                         | Additional Approval Text | Certificate name         |
|------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|--------------------------|
|    | ABS<br>American Bureau of Shipping               | -                        | 19-<br>HG1821926         |
|   | BV<br>Bureau Veritas S.A.                        | -                        | 13453/DO BV              |
|  | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194               |
|  | KR<br>Korean Register of Shipping                | -                        | KR<br>HMB05880-<br>AC001 |
|  | LR<br>Lloyds Register                            | -                        | 02/20026 (E6)            |
|  | PRS<br>Polski Rejestr Statków                    | -                        | TE/2236<br>/880590/19    |
|  | RINA<br>RINA Germany GmbH                        | -                        | ELE066419XG              |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastraße 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## UL-Approvals

| Logo                                                                             | Approval                                                     | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------|------------------|
|  | UL<br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Counterpart

## Compatible products

## Carrier rail

|                                                                                    |                                                                                                                                        |                                                                |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|    | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm"  | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                    | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm"  | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a> |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored  | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|  | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715          | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|  | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715        | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |

Subject to changes. Please also observe the further product documentation!

**Item no.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

[www.wago.com/210-506](http://www.wago.com/210-506)**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

[www.wago.com/210-508](http://www.wago.com/210-508)**Marking accessories****Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)**Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-145/000-006](http://www.wago.com/2009-145/000-006)**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-145/000-007](http://www.wago.com/2009-145/000-007)**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-145/000-012](http://www.wago.com/2009-145/000-012)**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)**Item no.: 248-501**

Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card

[www.wago.com/248-501](http://www.wago.com/248-501)**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)**Item no.: 750-100**

Marker card; as a DIN A4 sheet; plain; white

[www.wago.com/750-100](http://www.wago.com/750-100)**Item no.: 750-103**

Group marker carrier; transparent

[www.wago.com/750-103](http://www.wago.com/750-103)**Item no.: 750-106**

Group marker carrier; transparent

[www.wago.com/750-106](http://www.wago.com/750-106)**shield connection****Item no.: 790-108**

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)**Item no.: 790-116**

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**system box****Item no.: 850-804**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip

[www.wago.com/850-804](http://www.wago.com/850-804)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 850-804/000-001**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip

[www.wago.com/850-804/000-001](http://www.wago.com/850-804/000-001)**Item no.: 850-805**

IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip

[www.wago.com/850-805](http://www.wago.com/850-805)**Item no.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)**Item no.: 850-815/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

[www.wago.com/850-815/002-000](http://www.wago.com/850-815/002-000)**Item no.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)**Item no.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)**Item no.: 850-825**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)**Item no.: 850-826**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)**Item no.: 850-828**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)**Item no.: 850-834**

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable

[www.wago.com/850-835](http://www.wago.com/850-835)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



grip



Item no.: 850-836

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)

## Downloads

### Documentation

#### Manual

|                                                                                              |         |               |          |
|----------------------------------------------------------------------------------------------|---------|---------------|----------|
| 2-channel, thermocouples, line break detection<br>Sensor types: J, K, B, E, N, R, S, T, U, L | V 1.1.0 | pdf<br>2.6 MB | Download |
|----------------------------------------------------------------------------------------------|---------|---------------|----------|

#### Bid Text

|                                     |              |                |          |
|-------------------------------------|--------------|----------------|----------|
| 750-469/003-000<br>GAEB X81 - Datei | Feb 19, 2019 | xml<br>4.9 kB  | Download |
| 750-469/003-000<br>doc - Datei      | Oct 20, 2017 | doc<br>29.2 kB | Download |

#### System Description

|                                                                                        |         |                 |          |
|----------------------------------------------------------------------------------------|---------|-----------------|----------|
| 750/753 Series I/O-System – General Product Information                                |         | pdf<br>1.7 MB   | Download |
| Design Notes<br>Basic conditions and recommendations for higher operational safety     | V 2.0.0 | pdf<br>1.5 MB   | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals                                              |         | pdf<br>780.2 kB | Download |
| Use in Hazardous Environments<br>Term definition, marking and installation regulations | V 1.0.0 | pdf<br>1.0 MB   | Download |

## Application Notes

### Application Note CoDeSys 2.3

|                                                                                                                                      |                            |               |          |
|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------|----------|
| Application Note Library ModuleAccess_01<br>These instructions describe the use of the ModuleAccess_01.lib library using 4 examples. | 05.01.2016<br>Jan 29, 2016 | zip<br>1.0 MB | Download |
| ModuleAccess_01.lib                                                                                                                  | 1.8.7                      | zip           | Download |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



The ModuleAccess\_01 library provides both module configuration and access to its process data within a CoDeSys project without the use of WAGO I/O Check.

Jan 27, 2020

2.2 MB

### Application note SIEMENS

Parametrierung analoger Ausgangsklemmen 750-469 durch SIMATIC S7 (a100904)  
Dieses Applikationsbeispiel demonstriert den Einsatz des Funktionsbausteins FB69 zur Parametrierung der Analog Eingangsklemme 750-469/003-000 aus dem S7 Anwenderprogramm heraus. Es können alle relevanten Parameter gelesen und geschrieben werden. Die Parameter sind in dem Datentyp UDT1 abgebildet. Für jeden Eingangskanal der Klemme ist eine Instanz des FB's anzulegen.

V1.0.0

Mar 2, 2010

zip

827.7 kB

Download

## Libraries

### Library

ModuleAccess\_01.lib

The ModuleAccess\_01 library provides both module configuration and access to its process data within a CoDeSys project without the use of WAGO I/O Check.

1.8.7

Jan 27, 2020

zip

2.2 MB

Download

## CAD/CAE-Data

### CAD data

2D/3D Models 750-469/003-000

URL

Download

### CAE data

EPLAN Data Portal 750-469/003-000

URL

Download

WSCAD Universe 750-469/003-000

URL

Download

## Device Files

### Device Driver

WAGO USB Service Kabel Treiber / Serie 750 und 857

6.5.3.0

Sep 10, 2014

zip

4.8 MB

Download

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



## Product family

750/753 Series – I/O System

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

---

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.