


## Data sheet | Item number: 750-408

4-channel digital input; 24 VDC; 3 ms; Low-side switching; light gray


[www.wago.com/750-408](http://www.wago.com/750-408)

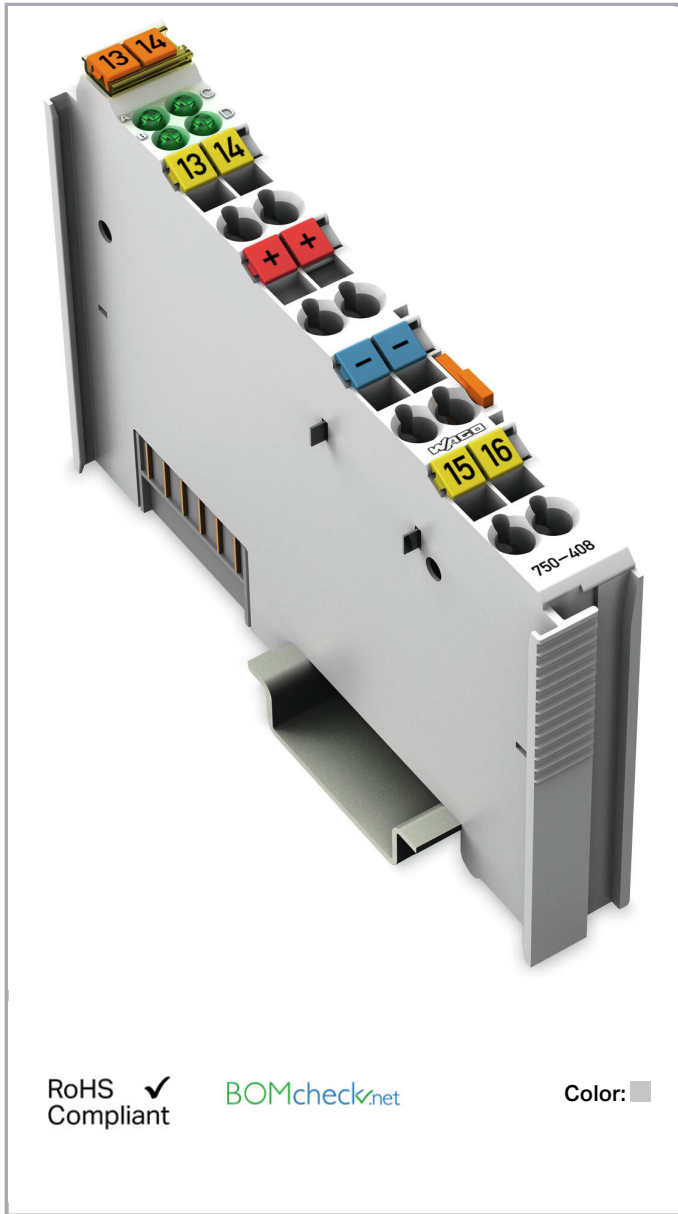

RoHS  
Compliant

BOMcheck.net



Color:

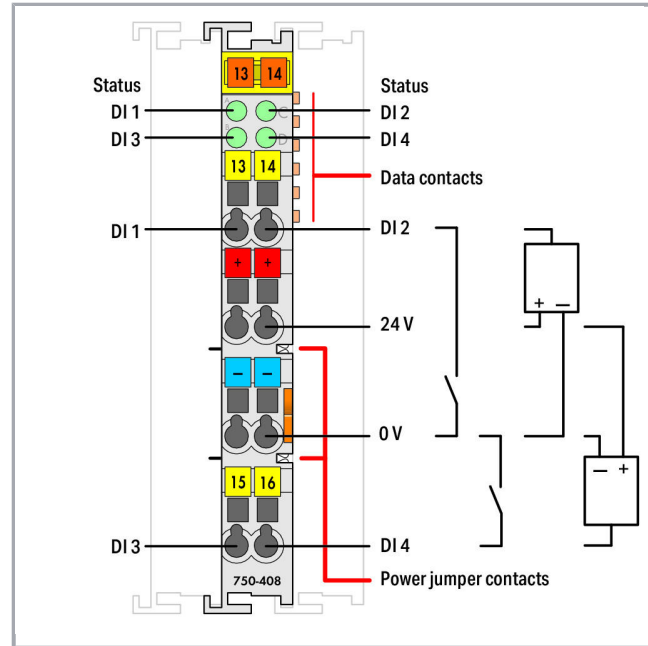

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

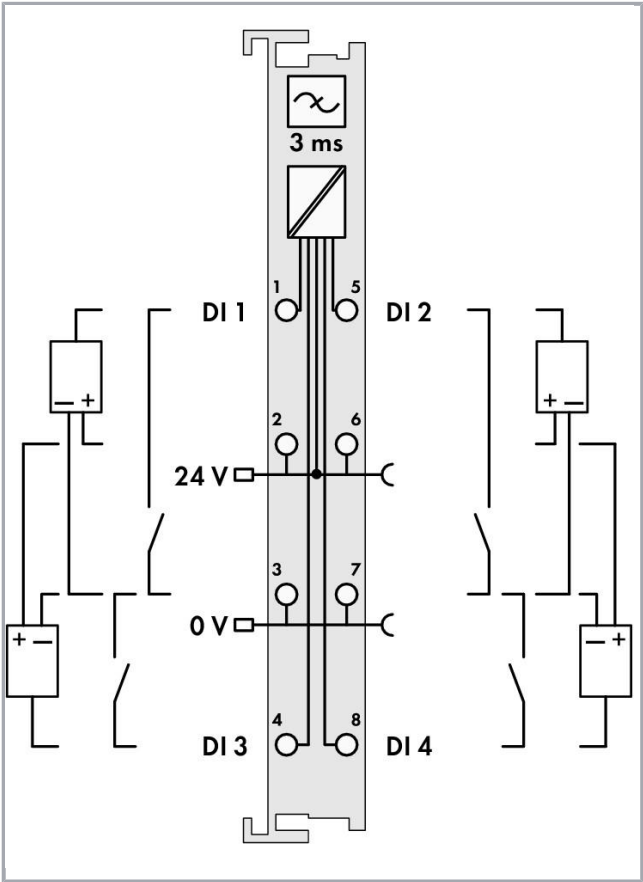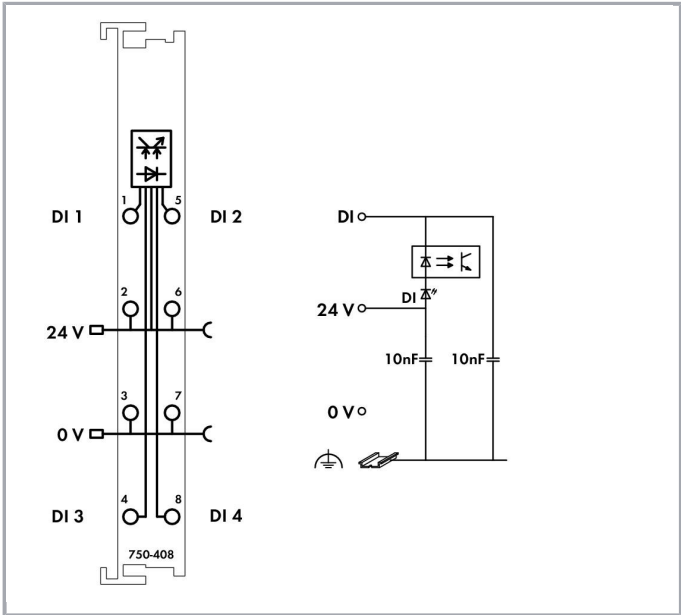

Item description

This digital input module receives control signals from field devices (e.g., sensors).

Each input module has a noise-rejection filter.

Field and system levels are electrically isolated.

Data

Technical Data

|                                   |                                                                                                                           |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Number of digital inputs          | 4                                                                                                                         |
| Total number of channels (module) | 4                                                                                                                         |
| Signal type                       | Voltage                                                                                                                   |
| Voltage signal type               | DC 24 V                                                                                                                   |
| Supply voltage (sensor)           | DC 24 V                                                                                                                   |
| Sensor connection                 | 2 x (2-wire, 3-wire); A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors. |
| Input characteristic              | low-side switching                                                                                                        |

Subject to changes. Please also observe the further product documentation!



|                                                   |                                                                                                                      |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Input filter (digital)                            | 3 ms                                                                                                                 |
| Input current per channel for signal (0) (typ.)   | 7 mA                                                                                                                 |
| Voltage range for signal (0)                      | ( $U_V - 5\text{ V}$ ) ... $U_V\text{ DC}$                                                                           |
| Voltage range for signal (1)                      | -3 VDC ... ( $U_V - 15\text{ V}$ )                                                                                   |
| Input data width (internal) (max.)                | 4 Bit                                                                                                                |
| Supply voltage (system)                           | DC 5 V; via data contacts                                                                                            |
| Power consumption (5 V system supply)             | 5 mA                                                                                                                 |
| Supply voltage (field)                            | DC 24 V (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission via spring contact) |
| Isolation                                         | 500 V system/field                                                                                                   |
| Indicators                                        | LED (A-D) green: Status DI 1 ... DI 4                                                                                |
| Number of incoming power jumper contacts          | 2                                                                                                                    |
| Number of outgoing power jumper contacts          | 2                                                                                                                    |
| Current carrying capacity (power jumper contacts) | 10 A                                                                                                                 |

### Connection data

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                  |
| Connection type (1)                   | Inputs/Outputs                   |
| Solid conductor                       | 0,08 ... 2,5 mm² / 28 ... 14 AWG |
| Fine-stranded conductor               | 0,08 ... 2,5 mm² / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inch  |

### Geometrical Data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 12 mm / 0.472 inch   |
| Height                            | 100 mm / 3.937 inch  |
| Depth                             | 69,8 mm / 2.748 inch |
| Depth from upper edge of DIN-rail | 62,6 mm / 2.465 inch |

### Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material Data

|                  |                              |
|------------------|------------------------------|
| Color            | light gray                   |
| Housing material | Polycarbonate, polyamide 6.6 |
| Fire load        | 1.535 MJ                     |
| Weight           | 46.5 g                       |

Subject to changes. Please also observe the further product documentation!

|                    |    |
|--------------------|----|
| Conformity marking | CE |
|--------------------|----|

## Environmental Requirements


|                                                                                    |                                       |
|------------------------------------------------------------------------------------|---------------------------------------|
| Surrounding air temperature (operation)                                            | 0 ... 55 °C                           |
| Surrounding air temperature (storage)                                              | -40 ... 85 °C                         |
| Protection type                                                                    | IP20                                  |
| Pollution degree (5)                                                               | 2 per IEC 61131-2                     |
| Operating altitude                                                                 | 0 ... 2000 m                          |
| Mounting position                                                                  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)                                           | 95 %                                  |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                  |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                |
| EMC immunity to interference                                                       | per EN 61000-6-2, marine applications |
| EMC emission of interference                                                       | per EN 61000-6-4, marine applications |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

## Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (Remote I/O) |
| Packaging type        | BOX             |
| Country of origin     | DE              |
| GTIN                  | 4045454392741   |
| Customs tariff number | 85389099990     |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                         | Additional Approval Text | Certificate name                  |
|------------------------------------------------------------------------------------|----------------------------------|--------------------------|-----------------------------------|
|  | ATEX<br>TUEV Nord Cert GmbH      | EN 60079-0               | TÜV 07<br>ATEX<br>554086 X<br>en. |
|                                                                                    | TUEV Nord<br>TUEV Nord Cert GmbH | IEC 60079-0              | IECEX<br>TUN<br>09.0001 X         |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**IECEX**


UL  
Underwriters Laboratories Inc. (HAZARDOUS  
LOCATIONS)

UL 121201

E198726  
Sec.1

## Country specific Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name            |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|-----------------------------|
|  | KC<br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>DIM750 |

## Ship Approvals

| Logo                                                                               | Approval                                         | Additional Approval Text | Certificate name      |
|------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|-----------------------|
|   | ABS<br>American Bureau of Shipping               | -                        | 19-<br>HG1821926      |
|  | BV<br>Bureau Veritas S.A.                        | -                        | 30389/B0 BV           |
|  | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194            |
|  | LR<br>Lloyds Register                            | -                        | 02/20026 (E6)         |
|  | NK<br>Nippon Kaiji Kyokai                        | -                        | TA17255M              |
|  | PRS<br>Polski Rejestr Statków                    | -                        | TE/2236<br>/880590/19 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



**RINA**  
RINA Germany GmbH

-

ELE066419XG

## UL-Approvals

| Logo                                                                             | Approval                                                            | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------|------------------|
|  | <b>UL</b><br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Counterpart

## Compatible products

### potential distribution




**Item no.: 750-614**  
Potential Distribution; light gray

[www.wago.com/750-614](http://www.wago.com/750-614)

### Carrier rail



**Item no.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

[www.wago.com/210-112](http://www.wago.com/210-112)


**Item no.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-113](http://www.wago.com/210-113)



**Item no.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

[www.wago.com/210-114](http://www.wago.com/210-114)


**Item no.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

[www.wago.com/210-115](http://www.wago.com/210-115)


**Item no.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-118](http://www.wago.com/210-118)


**Item no.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

[www.wago.com/210-197](http://www.wago.com/210-197)**Item no.: 210-198**

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

[www.wago.com/210-504](http://www.wago.com/210-504)**Item no.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

[www.wago.com/210-505](http://www.wago.com/210-505)**Item no.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

[www.wago.com/210-506](http://www.wago.com/210-506)**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

[www.wago.com/210-508](http://www.wago.com/210-508)**shield connection****Item no.: 790-108**

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)**Item no.: 790-116**

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**system box****Item no.: 850-804**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip

[www.wago.com/850-804](http://www.wago.com/850-804)**Item no.: 850-804/000-001**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip

[www.wago.com/850-804/000-001](http://www.wago.com/850-804/000-001)**Item no.: 850-805**

IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip

[www.wago.com/850-805](http://www.wago.com/850-805)**Item no.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

|                                                                                    |                                                                                                                                          |                                                                                |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-815/002-000">www.wago.com/850-815/002-000</a> |
|    | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-816/002-000">www.wago.com/850-816/002-000</a> |
|    | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-817/002-000">www.wago.com/850-817/002-000</a> |
|    | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                               | <a href="http://www.wago.com/850-825">www.wago.com/850-825</a>                 |
|    | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | <a href="http://www.wago.com/850-826">www.wago.com/850-826</a>                 |
|    | <b>Item no.: 850-826/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip  | <a href="http://www.wago.com/850-826/002-000">www.wago.com/850-826/002-000</a> |
|    | <b>Item no.: 850-827</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | <a href="http://www.wago.com/850-827">www.wago.com/850-827</a>                 |
|  | <b>Item no.: 850-827/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip  | <a href="http://www.wago.com/850-827/002-000">www.wago.com/850-827/002-000</a> |
|  | <b>Item no.: 850-828</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip         | <a href="http://www.wago.com/850-828">www.wago.com/850-828</a>                 |
|  | <b>Item no.: 850-828/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip | <a href="http://www.wago.com/850-828/002-000">www.wago.com/850-828/002-000</a> |
|  | <b>Item no.: 850-834</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                               | <a href="http://www.wago.com/850-834">www.wago.com/850-834</a>                 |
|  | <b>Item no.: 850-835</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | <a href="http://www.wago.com/850-835">www.wago.com/850-835</a>                 |
|  | <b>Item no.: 850-836</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | <a href="http://www.wago.com/850-836">www.wago.com/850-836</a>                 |
| <b>Supply module</b>                                                               |                                                                                                                                          |                                                                                |
|  | <b>Item no.: 750-601</b><br>Power Supply; 24 VDC; fuse holder; light gray                                                                | <a href="http://www.wago.com/750-601">www.wago.com/750-601</a>                 |

**Item no.: 750-602**

Subject to changes. Please also observe the further product documentation!



Power Supply; 24 VDC; light gray

[www.wago.com/750-602](http://www.wago.com/750-602)**Item no.: 750-610**

Power Supply; 24 VDC; fuse holder; Diagnostics

[www.wago.com/750-610](http://www.wago.com/750-610)**Item no.: 750-612**

Power Supply; 0 ... 230 V AC/DC; light gray

[www.wago.com/750-612](http://www.wago.com/750-612)**Marking accessories****Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)**Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-145/000-006](http://www.wago.com/2009-145/000-006)**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-145/000-007](http://www.wago.com/2009-145/000-007)**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-145/000-012](http://www.wago.com/2009-145/000-012)**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)**Item no.: 248-501**

Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card

[www.wago.com/248-501](http://www.wago.com/248-501)**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)**Item no.: 750-100**

Marker card; as a DIN A4 sheet; plain; white

[www.wago.com/750-100](http://www.wago.com/750-100)**Item no.: 750-103**

Group marker carrier; transparent

[www.wago.com/750-103](http://www.wago.com/750-103)**Item no.: 750-106**

Group marker carrier; transparent

[www.wago.com/750-106](http://www.wago.com/750-106)**Downloads****Documentation****Manual**

4-channel, 24VDC, 3.0ms

V 1.3.0

pdf  
2.0 MB

Download

2- to 3-wire connection, low-side switching

**Bid Text**

750-408

Jul 12, 2017

doc  
26.1 kB

Download

doc - Datei

750-408

Feb 19, 2019

xml  
3.9 kB

Download

GAEB X81 - Datei

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



## System Description

|                                                                    |         |                 |          |
|--------------------------------------------------------------------|---------|-----------------|----------|
| Design Notes                                                       | V 2.0.0 | pdf<br>1.5 MB   | Download |
| Basic conditions and recommendations for higher operational safety |         |                 |          |
| 750/753 Series I/O-System – General Product Information            |         | pdf<br>1.7 MB   | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals                          |         | pdf<br>780.2 kB | Download |
| Use in Hazardous Environments                                      | V 1.0.0 | pdf<br>1.0 MB   | Download |
| Term definition, marking and installation regulations              |         |                 |          |

## CAD/CAE-Data

### CAD data

|                      |     |          |
|----------------------|-----|----------|
| 2D/3D Models 750-408 | URL | Download |
|----------------------|-----|----------|

### CAE data

|                           |     |          |
|---------------------------|-----|----------|
| EPLAN Data Portal 750-408 | URL | Download |
| WSCAD Universe 750-408    | URL | Download |

## Device Files

### Device Driver

|                                                    |                         |               |          |
|----------------------------------------------------|-------------------------|---------------|----------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>Sep 10, 2014 | zip<br>4.8 MB | Download |
|----------------------------------------------------|-------------------------|---------------|----------|

## Installation Notes

## Product family

**750/753 Series – I/O System**  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.