


Data sheet | Item number: 870-406

Push-in type jumper bar; insulated; 6-way; Nominal current 18 A; light gray

www.wago.com/870-406

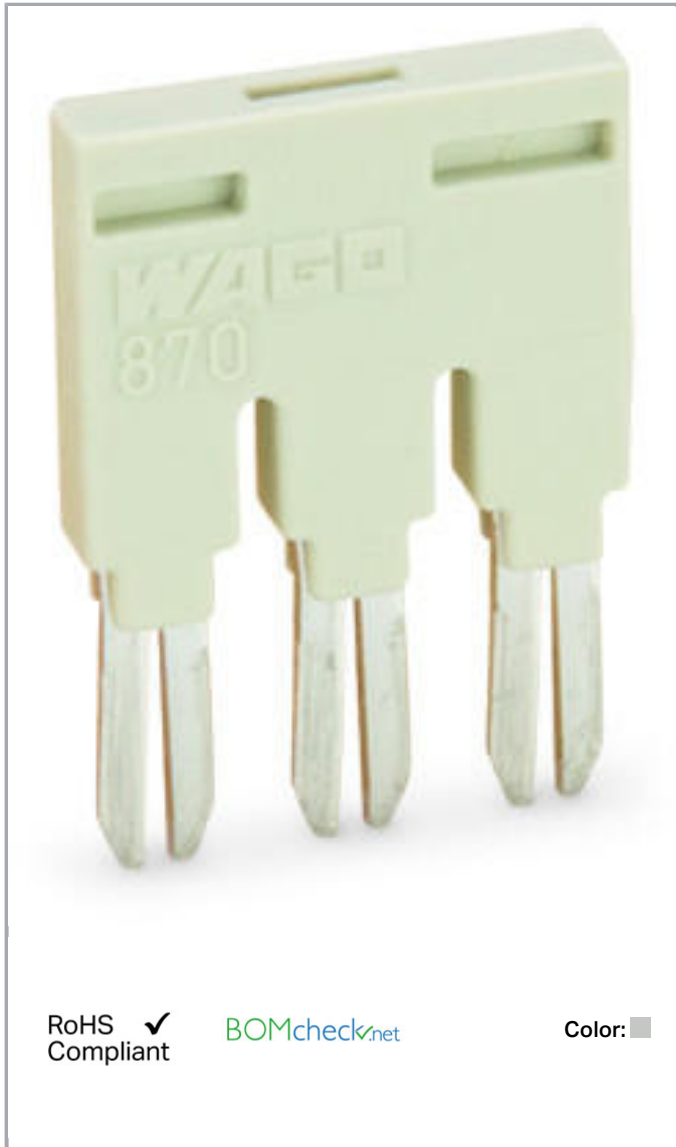

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

Geometrical Data

Width	29 mm / 1.142 inch
Depth	2,5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0.03 MJ
Weight	2.9 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918508285
Customs tariff number	85366990990

Counterpart

Downloads

Documentation

Bid Text

870-406	Jan 4, 2018	doc	Download
doc - Datei		24.1 kB	
870-406	Feb 19, 2019	xml	Download
GAEB X81 - Datei		2.6 kB	

CAD/CAE-Data

CAD data

2D/3D Models 870-406	URL	Download
----------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

CAE data


WSCAD Universe 870-406

URL

Download

Installation Notes

Jumpered

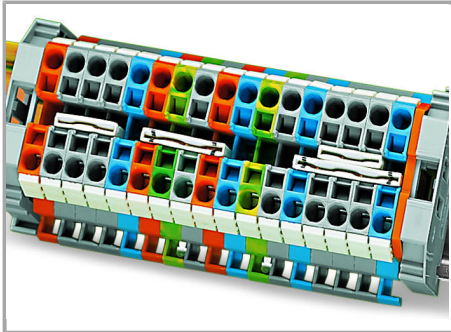

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes. Please also observe the further product documentation!