


Project		Catalog #		Type	
Prepared by		Notes		Date	

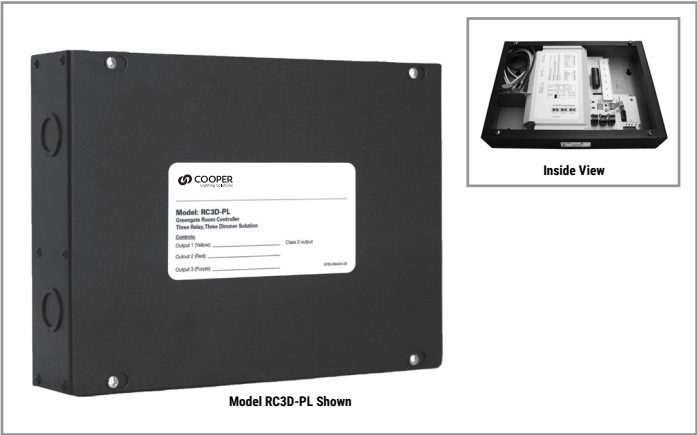

Greengate
Room Controller

Interactive Menu

- Order Information page 2
- Additional Resources page 2
- Wiring Diagrams page 4
- Connected Systems page 4
- Product Warranty


Product Certification



Top Product Features

- Click & Go ready, RJ45 connections
Preconfigured for automatic functionality upon power-up
Manual or Automatic On, bi-level, tri-level and dimming control strategies
Integral Demand Response input with four levels of preconfigured energy reduction
Built in tubular lighting control with preconfigured wallstation controls

Dimensional and Mounting Details

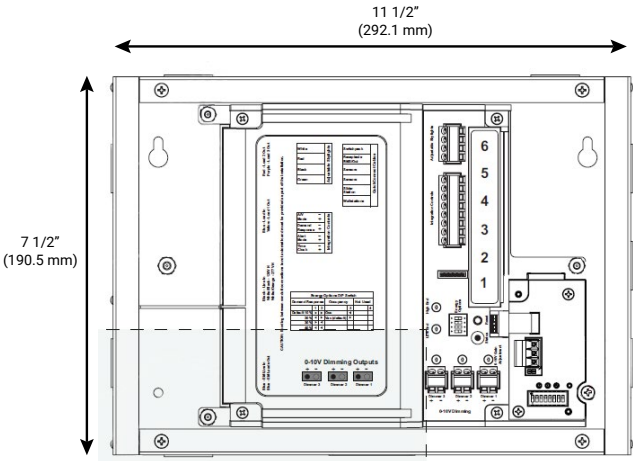

additional product diagrams

Order Information

SAMPLE ORDER NUMBER: **RC3-PL, RC3D-PL, RC3DE-PL, RC3DEHC-PL, RC3D-PL-CP, RC3DE-PL-CP, RC3DEHC-PL-CP**

Catalog Number	Description	Voltage	Ballast/Incandescent
Catalog Number	Description	Voltage	Ballast/Incandescent
RC3-PL	3 Relays, Plenum	120/277 VAC, 60 Hz	Maximum Combined Load 20A
RC3D-PL	3 Relays, 3 0-10V dimming, Plenum	120/277 VAC, 60 Hz	Maximum Combined Load 20A
RC3DE-PL	3 Relays, 3 0-10V dimming, UL 924, Plenum	120/277 VAC, 60 Hz	Maximum Combined Load 20A
RC3DEHC-PL	3 Relays, 3 0-10V dimming, UL 924 for healthcare, Plenum	120/277 VAC, 60 Hz	Maximum Combined Load 20A
RC3D-PL-CP	3 Relays, 3 0-10V dimming, Chicago Plenum Room Controller	120/277 VAC, 60 Hz	Maximum Combined Load 20A
RC3DE-PL-CP	3 Relays, 3 0-10V dimming, UL924, Chicago Plenum Room Controller	120/277 VAC, 60 Hz	Maximum Combined Load 20A
RC3DE-PL-CP	3 Relays, 3 0-10V dimming, UL924 for healthcare, Chicago Plenum Room Controller	120/277 VAC, 60 Hz	Maximum Combined Load 20A

Additional Options

Catalog #	Description
Catalog	Description
GGRC-COUPLER	RJ45 Coupler
GGRC-SPLITTER	RJ45 Splitter
GGRJ45-006-G	RJ45 cables 6 inches
GGRJ45-03-G	RJ45 cables 3 feet
GGRJ45-10-G	RJ45 cables 10 feet
GGRJ45-25-G	RJ45 cables 25 feet
GGRJ45-50-G	RJ45 cables 50 feet
GGRJ45-100-G	RJ45 cables 100 feet
GGRJ45-10P-G	RJ45 cables 10 feet plenum rated
GGRJ45-25P-G	RJ45 cables 25 feet plenum rated
GGRJ45-50P-G	RJ45 cables 50 feet plenum rated
GGRJ45-100P-G	RJ45 cables 100 feet plenum rated
Note: Please refer to the Room Controller page on our website for more information	

Product Specifications

Mechanical

Size: 11 1/2" W x 7 1/2" H x 2 1/4" D (292.1 mm x 190.5 mm x 57.15 mm)

Environment:

- **Operating temperature:** 32°F to 104°F (0°C to 40°C)
- For indoor use only

Installation

Install in accordance with National Electrical Code and any other codes that may apply.

Voltage

Input/Output Voltage:

- 120/277 VAC, 60 Hz
- Maximum 20A combined load per Room Controller
- Ballast load: 20A @ 120/277 VAC (LED)
- Incandescent load: 15A @ 120 VAC
- Motor load: 1HP @ 120 VAC

LED Drivers:

- Requires isolated LED drivers for optimal performance

Emergency Output (RC3DE/RC3DEHC only) UL 924

- LED, Ballast or Incandescent Load: 3A

Class 2 Dimming Output

- 0-10 VDC, sinks up to 100mA per (40 µA max per circuit leakage to line)
- Each 0-10V output supports up to 50 ballasts / drivers that draw the standard 2mA each

Standards/Ratings

- UL Approved
- UL 508 Listed
- UL 924 Listed

Warranty

Five year warranty standard

Overview

The Room Controllers are connected to a 120 VAC or 277 VAC 20 Amp circuit to provide unit power and input power to the individual relays. The wallstations, occupancy sensors, daylight sensors and receptacle control devices connect via QuickConnect cables (ordered separately) providing a Class 2 connection. Upon power up the pre-engraved wallstation automatically controls the On/Off relays adjust the dimming outputs. The daylight sensor will immediately adjust the lighting levels based on natural light.

The line voltage section of the Room Controller provides the installing contractor space to make all line voltage connections and direct conduit access, reducing the need for additional junction boxes, while providing easy access to line voltage circuits. Low voltage devices are connected using Cat5 cables (ordered separately).


UL 924 relay is provided on some units for automatic emergency lighting control. The UL 924 relay automatically tracks with output 1 and can be connected to any of the three 0-10V dimmers. The UL 924 relay automatically closes and disconnects the 0-10V control open loss of normal power providing adequate egress lighting control. Ladderless maintenance testing of the UL 924 relay can be achieved by pressing the ALL OFF button four times.

Wiring Diagrams

Sample Wiring Diagram

Control Systems

- Greengate

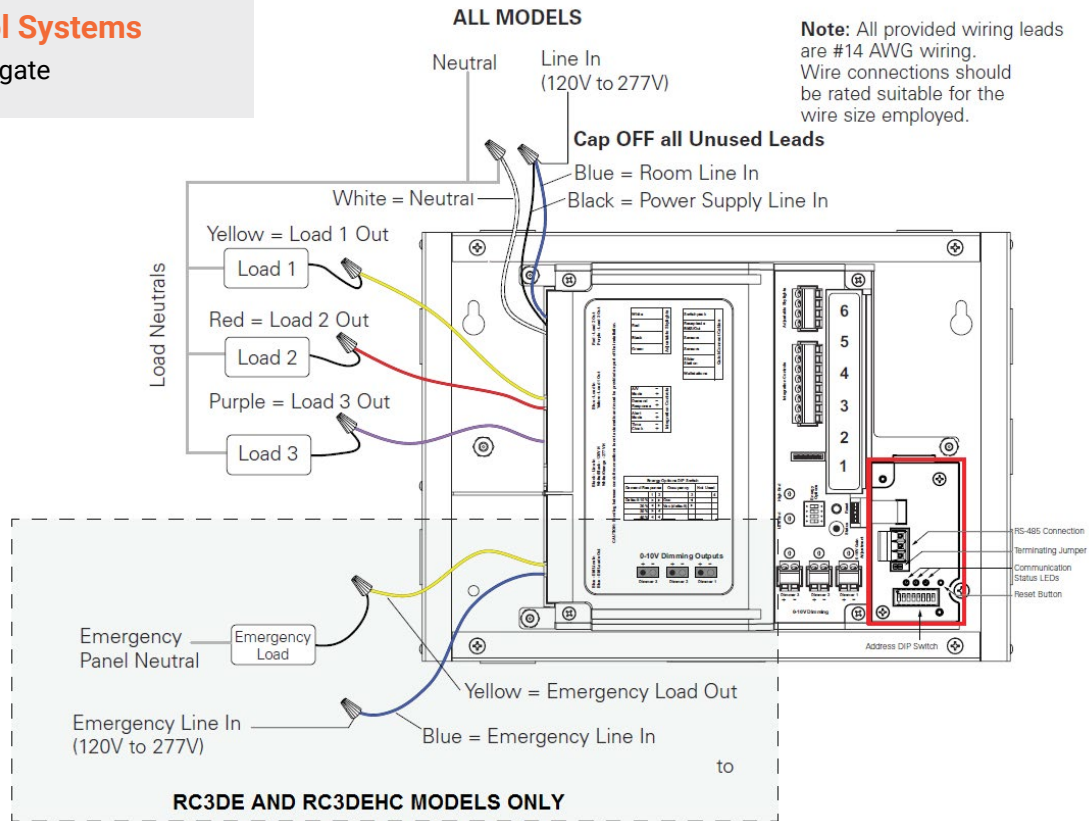

Room Connections

