

# Room Controller Network

|          |             |
|----------|-------------|
| Catalog# | Prepared by |
| Project  | Date        |
| Comments | Type        |

## Overview

The Room Controller Network includes three relays and up to three 0-10 VDC dimming outputs to control compatible dimmable luminaires. The Room Controller Network is shipped to work out-of-the-box when connected to Room Controller devices, allowing quick and easy daylighting controls, occupancy/vacancy sensing and manual switching.


Network up to 254 ControlKeeper and Room Controller Network lighting control panels for a complete network system.

## Features

- Click & Go ready, RJ45 connections
- Preconfigured for automatic functionality upon power-up
- Manual or Automatic On, bi-level, tri-level and dimming control strategies
- Local and network Demand Response input for automatic energy reduction
- Each 0-10V control supports up to 50 dimming drivers sourcing 2mA
- Integral pillow speaker connections for GPCS (RC3DEHC-PL-N)
- Integral Solatube® connection for classrooms
- Provides multi-level corridor lighting control
- Guaranteed compatibility with Cooper Lighting Solutions LED and 0-10V fluorescent fixtures
- Ladderless UL 924 Emergency Mode testing (RC3DE & RC3DEHC)
- Network up to 254 ControlKeeper and Room Controller Network lighting control panels



Model RC3D-PL-N Shown

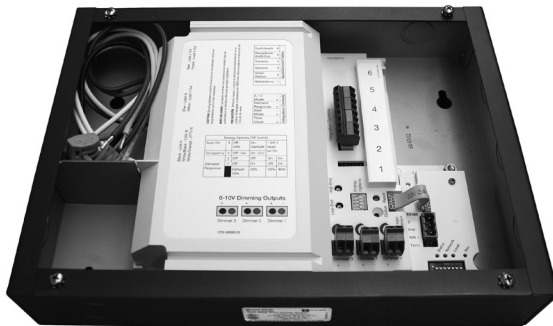

Inside View

March 2018

## Specifications

|   |  |
|---|--|
| <b>Size</b>   | 11 1/2"H x 7 1/2"W x 2 1/4"D   |
| <b>Input/Output Voltage</b>                         | 120/277 VAC, 60Hz  |
|   | Maximum 20A combined load per Room Controller  |
|   | Ballast load: 20A @ 120/277 VAC (LED)  |
|   | Incandescent load: 15A @ 120 VAC   |
|   | Motor load: 1HP @ 120 VAC  |
| <b>Emergency Output (RC3DE/RC3DEHC only) UL 924</b> | LED, Ballast or Incandescent load: 3A  |
| <b>Class 2 Dimming Output</b>                       | 0-10 VDC, sinks up to 100mA per (40 $\mu$ A max per circuit leakage to line)<br>Each 0-10V output supports up to 50 ballasts/drivers that draw the standard 2mA each |
| <b>LED Drivers</b>                                  | Requires isolated LED drivers for optimal performance  |
| <b>Operating Environment</b>                        | Temperature: 32°F to 104°F (0°C to 40°C)<br>For indoor use   |
| <b>Standards</b>                                    | UL Approved<br>UL 508 Listed<br>UL 924 Listed  |



## System Includes

- UL listed - UL 508 standard, UL 924 Optional
- NEMA 1 enclosure
- 12 Zone or Scene Wallstations
- Programmable Scene control
- Open loop three zone daylight sensor
- Time clock input
- Occupancy/Vacancy Sensor Connection
- Occupancy based receptacle control
- Occupancy based HVAC output
- RS-485 network standard
- Software programmable

## Accessories (sold separately)

- Keeper Enterprise Software
- CEPC-1-D (UL 924 0-10V Accessory)
- Ethernet Interface Module
- EISSBox OpenADR device
- Receptacle Rated Switchpack
- Zone Wallstations
- Scene Wallstations
- Dimming Slider
- Daylight Sensor
- Occupancy Sensors
- Input/Output Device
- Personal Remote
- QuickConnect Cable
- Network Repeater (RPTR)
- BACnet interface (BMSPro)

## Description/Operation

The Room Controller products can be networked together to expand their out of the box capabilities. Perfect for projects that have multiple rooms that have similar requirements. The Room Controllers can be installed and provide control capabilities on day one without requiring network programming. As the project schedule allows network programming can be completed to provide centralized control and user training.

## Installation


The line voltage section of the Room Controller provides the installing contractor space to make all line voltage connections and direct conduit access, reducing the need for additional junction boxes, while providing easy access to line voltage circuits. Low voltage devices are connected using Cat5 cables (ordered separately).

UL 924 relay is provided on some units for automatic emergency lighting control. The UL 924 relay automatically tracks with output 1 and can be connected to any of the three 0-10V dimmers. The UL 924 relay automatically closes and disconnects the 0-10V control open loss of normal power providing adequate egress lighting control. Ladderless maintenance testing of the UL 924 relay can be achieved by pressing the ALL OFF button four times.


ControlKeeper and Room Controller Network lighting control panels are joined together using a RS-485 network cable sold separately (GG9841, GG9842, GG89841P, GG89842P).

Include the Network Repeater to provide the ability to extend the lighting control network beyond the specified 4,000 feet or more than 32 panels.


## Sample Room Layout

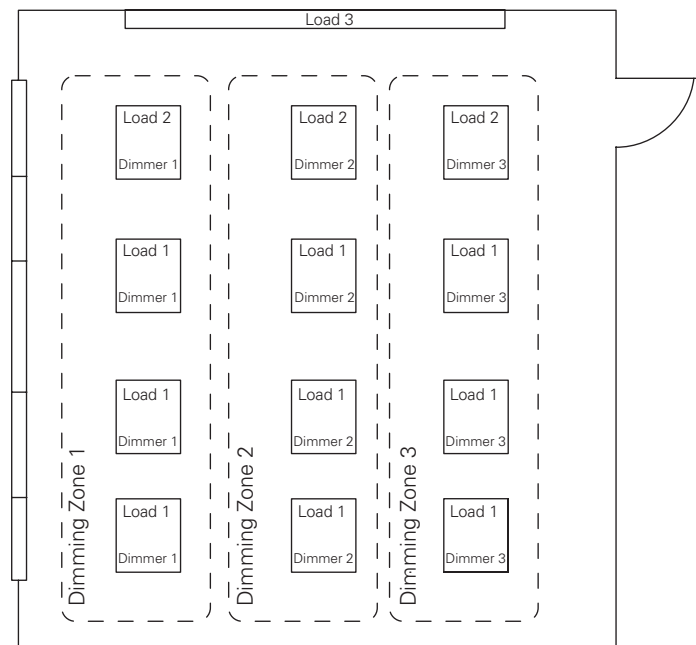

## Sample Wiring Diagram

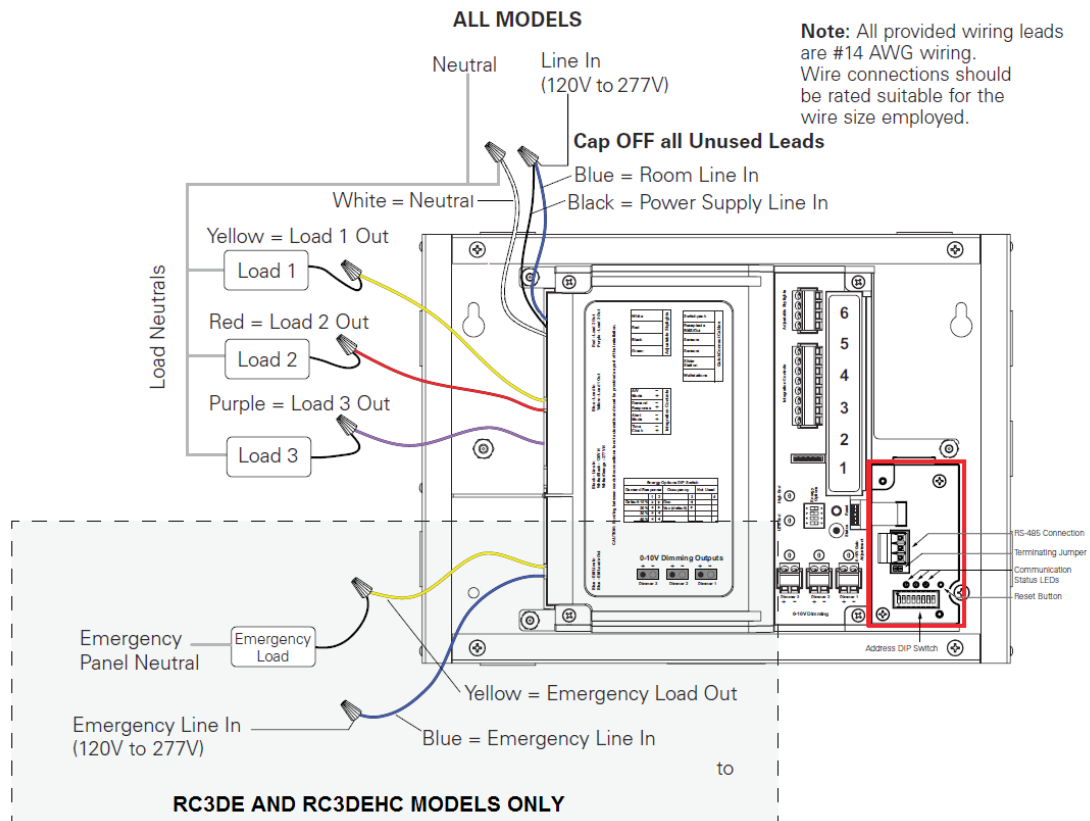

## Room Connections

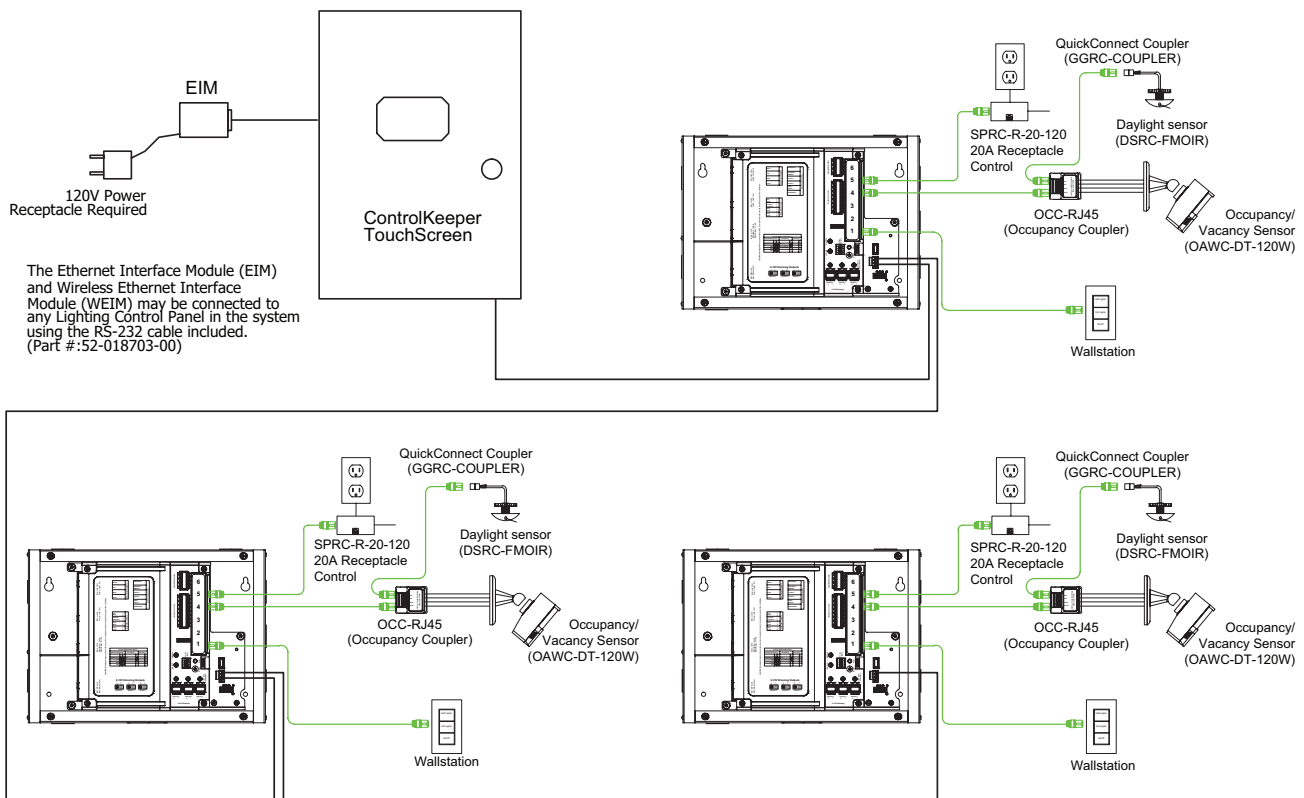

March 2018

## Ordering

| Catalog #       | Description   | Voltage            | Ballast/Incandescent      |
|-----------------|---|--------------------|---------------------------|
| RC3-PL-N        | 3 relays, Plenum, Network Room Controller   | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |
| RC3D-PL-N       | 3 relays, 3 0-10V dimming Plenum, Network Room Controller                               | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |
| RC3DE-PL-N      | 3 relays, 3 0-10V dimming, UL924 Plenum, Network Room Controller                        | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |
| RC3DEHC-PL-N    | 3 relays, 3 0-10V dimming UL924 for healthcare Plenum, Network Room Controller          | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |
| RC3D-PL-N-CP    | 3 relays, 3 0-10V dimming, Chicago Plenum Network Room Controller                       | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |
| RC3DE-PL-N-CP   | 3 relays, 3 0-10V dimming, UL924, Chicago Plenum Network Room Controller                | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |
| RC3DEHC-PL-N-CP | 3 relays, 3 0-10V dimming, UL924 for healthcare, Chicago Plenum Network Room Controller | 120/277 VAC, 60 Hz | Maximum Combined Load 20A |

## Room Controller Upgrade Ordering Option

| Catalog # | Description   |
|-----------|---|
| RCNN      | Room Controller Network Node, upgrades stand alone Room Controller to the network option.             |
| RPTR      | Network Repeater is needed every 32 network panels and/or to extend the lighting network beyond 4000' |

## Additional Options (Sold Separately)

| Catalog #     | Description                       |
|---------------|-----------------------------------|
| GGRC-COUPLER  | RJ45 Coupler                      |
| GGRC-SPLITTER | RJ45 Splitter                     |
| GGRJ45-006-G  | RJ45 cables 6 inches              |
| GGRJ45-03-G   | RJ45 cables 3 feet                |
| GGRJ45-10-G   | RJ45 cables 10 feet               |
| GGRJ45-25-G   | RJ45 cables 25 feet               |
| GGRJ45-50-G   | RJ45 cables 50 feet               |
| GGRJ45-100-G  | RJ45 cables 100 feet              |
| GGRJ45-10P-G  | RJ45 cables 10 feet plenum rated  |
| GGRJ45-25P-G  | RJ45 cables 25 feet plenum rated  |
| GGRJ45-50P-G  | RJ45 cables 50 feet plenum rated  |
| GGRJ45-100P-G | RJ45 cables 100 feet plenum rated |

**Note:** Please refer to the Room Controller page on our website for more information

**Cooper Lighting Solutions**  
 1121 Highway 74 South  
 Peachtree City, GA 30269  
 P: 770-486-4800  
[www.cooperlighting.com](http://www.cooperlighting.com)  
 For service or technical assistance:  
 1-800-553-3879

© 2020 Cooper Lighting Solutions  
 All Rights Reserved  
 Printed in USA  
 Publication No. TD503122EN  
 March 1, 2018

Specifications and  
 dimensions subject to  
 change without notice.