

Paxton10 Keypad Reader

Paxton10

Overview


The Keypad Reader brings PIN and Code support to the Paxton10 system in a stylish and simple design with a rugged IP67 construction.

Designed using cutting edge technology, the Paxton10 Keypad Reader packs a huge amount of functionality into its compact package. The new reader supports all leading tokens including HID Prox®, Mifare®, Paxton and EM, as well as offering Bluetooth for communication with long range or hands free credentials and mobile telephones via the Paxton app.

The Keypad Reader also includes LED backlighting, whilst using minimal energy during operation through its built in wake-up mechanism.

Features

- Durable hardened silicone keypad
- Backlit for easy use and identification in low light
- Brings Paxton simplicity to the plethora of token types currently on the market by supporting all of them concurrently.
- Multi-format reading technology offering compatibility with Paxton, MIFARE, HID Prox®, EM and more.
- Low power sleep mode
- Built-in Bluetooth Smart and Low Energy support to allow communication to mobile and wearable devices.
- Simple 2-part construction with encapsulated 5m cable included
- IP67 rated
- Simple 4 wire installation

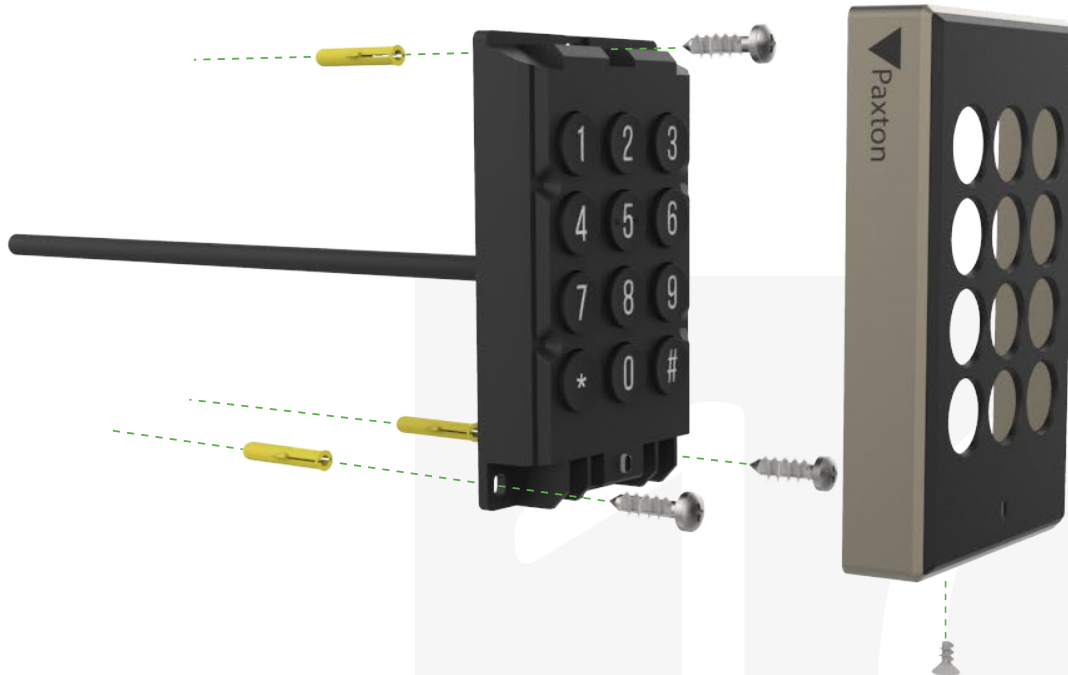



System

Token compatibility	Paxton, EM4100/02, Sony®, FeliCa Lite-S
	MIFARE® Classic, MIFARE® DESFire® EV1/EV2
	MIFARE® Plus, MIFARE Ultralight®
	MIFARE Ultralight C®, MIFARE Mini®, NFC®,
	Hitag2, HID® Prox 125kHz low frequency



Electrical

Power consumption	1W (Max)
Operating voltage	12V
Current Draw	40mA (Quiescent)
	100mA (Max)



Communication

RFID frequency	125kHz & 13.56MHz
Data connection	RS485/Paxton10 protocol
Bluetooth®	2.4GHz



Hardware

Dimensions (W x H x D)	63.8mm x 104mm x 18.2mm
	2 ³³ / ₆₄ " x 4 ³ / ₃₂ " x ²³ / ₃₂ "
Cable Type	22AWG, 4 core twisted pair
Cable Length	5m/ 16ft
Maximum cable extension length (Controller > Reader)	100m / 328ft
Sound	Piezo Buzzer
Colour	Black
Housing material	PC+ABS
Warranty	Paxton 5 year



Environment

Operating temperature	-31°F - +150°F
IP Rating	IP67
IK Rating	IK09
Mounting	Surface only
	US - Backbox Apdator

Certifications: UL 294, FCC 15C