


## **Features**

- Multi-format reading technology offering compatibility with Paxton, MIFARE \*, HID Prox and NFC
- Brings Paxton simplicity to the plethora of token types on the market, by supporting them all concurrently
- Discrete form factor for desktop mounting
- Simple USB connection
- Paxton simplicity Zero configuration installation
- Attractive slimline design



# Specifications

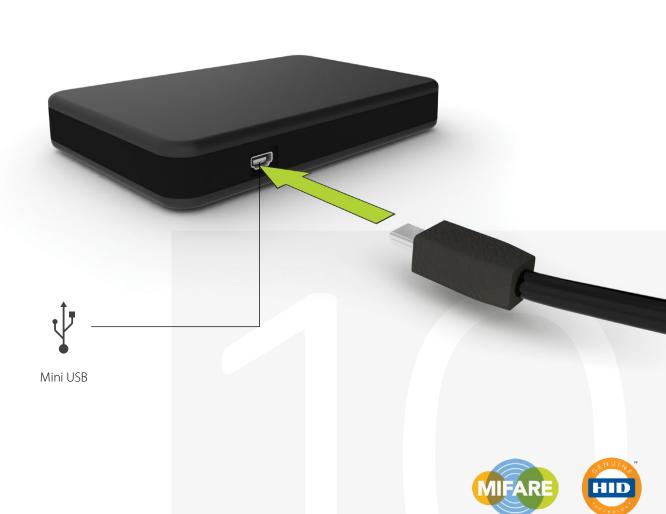



### System

Token compatibility	Paxton, EM4100/02, Sony® FeliCa Lite-S
	MIFARE * Classic, MIFARE* DESFire* EV1
	MIFARE Plus®, MIFARE Ultralight®
	MIFARE Ultralight C*, MIFARE Mini*, NFC*
	Hitag2, HID® Prox 125kHz low frequency
Proximity	Yes
Magstripe	No



#### Electrical

Power consumption	0.5 W
Operating voltage	5V (USB)



#### Hardware

Dimensions (W x H x D)	115mm x 19mm x 75 mm
	4 <sup>17</sup> / <sub>32</sub> " × <sup>3</sup> / <sub>4</sub> " × 2 <sup>61</sup> / <sub>64</sub> "
Cable type	Mini USB to USB cable (supplied)
Cable length	1.8m/ 5.9ft
Warranty	Paxton 5 year



#### Environment

Operating temperature	+32°F - +120°F
IP rating	N/A

Certifications: FCC 15C

MIFARE \*, MIFARE \* Classic, DESFire, MIFARE \* Plus and MIFARE \* Ultralight C are trademarks of NXP B.V.

\*NFC refers to NFC enabled cards and tokens and does not include the use of smartphones