




Features

- Ultra compact & fanless design
- Single HD monitor output (HDMI)
- Onvif camera discovery & RTSP source support
- Low Power Consumption
- Supports up to 32 IP cameras / encoder sources
- High performance hardware video decoding
- Layouts from 1 x 1 to 4 x 4
- Supports up to 5 user configurable static views
- Supports up to 4 user configurable view sequences
- Supports web tiles for embedding external content
- Support for Panasonic WV-CU980 network keyboard

Live HD Video Monitor



ION-R100S




IP Cameras

ION-R100S

HD Secure Display Station™

The ION-R100S is a dedicated fanless & compact video decoder designed specifically for use with any H.265/H.264/MJPEG video source such as IP cameras and encoders. The ION-R100S is capable of decoding H.265/H.264 streams at resolutions up to 4K for display on an HD monitor (HDMI). The device is capable of simultaneous decoding and display of up to 16 IP video streams.

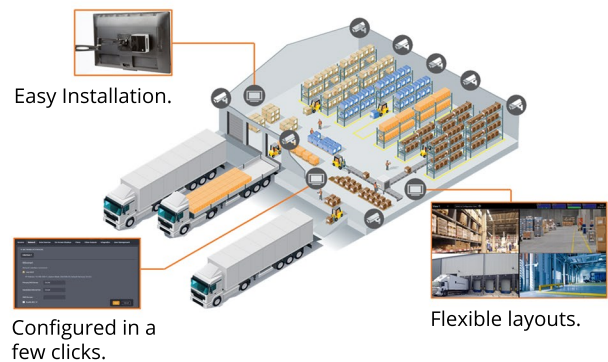

A secure way to display live video

The ION-R100S Secure Display Station™ can deliver live video on a variety of monitors without the cost, complexity and security risk of a client workstation. This is ideal in public areas, warehouses and in remote sites or facilities with no trained security staff.

Built to last

The ION-R100S is designed using the highest quality components and a software environment built from the ground up to offer a simple, yet robust user experience. The ION-R100S' robust embedded software environment ensures consistent and reliable operation even after power outages.



ION-R100S Specifications

HD Secure Display Station™

System

Network	1 x 10/100/1000 Base-T Ethernet port(s) RJ45
USB	1 x USB 3.0 (Future expansion) 4 x USB 2.0 (Mouse, Keyboard)
Video Output	1 x Full Size HDMI 1.4 * Single screen: 1080p recommended * 4K output supported with limitations
Boot Drive	Solid State Boot Drive (SSD) * Read-only, secure
PTZ Keyboard	Support for Panasonic WV-CU980 Network Keyboard

Video Processing

Resolution	Decode IP streams up to 4K resolution
Codec	H.265 (HEVC) / H.264 (MPEG-4 AVC) Motion JPEG
Data Rates	Up to 54 Mbps (total for all channels) Ex. 1 Stream @ 4K/15FPS 9 Streams @ 1080p30 12 Streams @ 720p30 16 Streams @ D1/30FPS (max. 2 streams when HDMI output in 4K)
Latency	< 200 ms
Layouts	1x1, 2x2, 3x3, 4x4, 1+2, 2+3, 1+5, 5+1 and more...
Views	Up to 5 user-configurable static views Up to 4 user-configurable view sequences
Video Sources	Up to 32 (max. 16 on-screen)
Web Tiles	Supported; max. 1 recommended

Protocols

Networking	IPv4, UDP, TCP, IGMP, ARP, DHCP, DNS, HTTP, HTTPS, BONJOUR, NTP
Camera Interface	Onvif discovery or Generic RTSP
Management	HTTP, HTTPS, Bonjour, ION API, SNMP
Security	Basic / Digest Authentication, SSL Support for 802.1X, Configurable password policy, Protection against brute-force attacks, Protection against clickjacking and cross-site scripting

Software Features

Visual Diagnostics	CPU, GPU, Memory, Network
On-Screen Display	Supported; max. 4 strings per OSD entry
Web Interface	Web GUI for remote config. / maintenance
Programming API	Bonjour discovery protocol ION API and Genetec API for configuration
Software Update	Fault-tolerant, remote accessible

Mechanical / Environmental

Dimensions	3.74" x 2.58" x 1.77" (W x D x H)
Mounting	VESA Mount (included)
Power Input	5V AC-DC power adapter (included) * North America, EU, UK, Australia
Power Consumption	6W on average / TDP
Operating Temp.	0°C to 50°C
Warranty	2 Years Standard
Compliance	CE, FCC Class A, RoHS, REACH



www.ionodes.com

Head Office
1855 Bernard-Lefebvre,
Laval, Quebec
H7C 0A5, Canada

sales@ionodes.com

1.450.696.1060
1.844.696.1060 (Toll Free)

EMEA Office
15, Rue de l'Industrie,
Bertrange, L-8069
Luxembourg

sales_eu@ionodes.com

+33 (0) 6 03 13 79 75