

AVR-HT816H

16 CH 4K UHD DIGITAL
VIDEO RECORDER




H.265 4K UHD DIGITAL VIDEO RECORDER

4K / 5MP / 4MP / 3MP / 1080P / 720P

4K HD OVER COAX & UTP

FUNCTION

- Supports Up to 16 CH TVI/AHD/CVI/8MP/5MP/4MP/3MP/1080P/720P/WD1 video input
- Supports 8CH 8MP/5MP/4MP/3MP/1080P/960P/720P IP video input
 - Standard H.265 high profile compression format
 - Intuitive and user-friendly Graphic User Interface (GUI)
- Multiple Recording Modes: Manual, Scheduled, Motion, and Sensor
 - Playback: 16 Channels Simultaneous Playback
- Search: Search by Time Slice, Time, Event (Manual, Sensor, Motion), Tag Search
 - Quick and Intuitive Backup via USB and Network
- Pentaplex Operation: Can simultaneously allow Preview, Record, Playback, Backup and Remote Access from Different Users
- Network functions such as DHCP, DDNS, PPPoE protocols supported and also access with CMS clients.
- Remote Access using Internet Explorer/Safari or CVMS: Live Preview, Playback, Backup, PTZ, and System Configuration
- Dual stream technology allows for High Quality Local Recordings and Standard Quality Video for Mobile and Remote Access
 - Allows Simultaneous Online Users to Access Device
- Support PTZ Preset and Auto-Cruise, with Up to 255 Presets and 8 Cruise Paths
 - Support NAT Function and QR Code Scanning by Mobile Apps, Eliminating the need to Configure Port Forwarding
 - Powerful Mobile Apps on iOS and Android

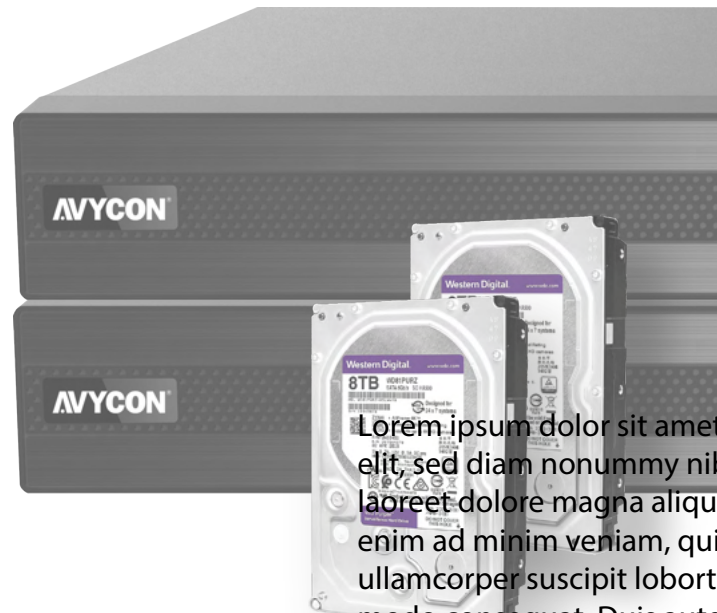

Lorem ipsum dolor sit amet
elit, sed diam nonummy nib
laoreet dolore magna aliqu
enim ad minim veniam, qui
ullamcorper suscipit lobort
modo consequat. Duis aute
hendrerit in vulputate velit
illum dolore eu feugiat null
accumsan et iusto odio dig
luptatum zzril delenit augu



AVYCON[®]



Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

AVR-HT816H

16 CH 4K UHD DIGITAL VIDEO RECORDER



DIMENSIONS



REAR PANEL



AVAILABLE HDD OPTIONS

- 1TB HDD: AVR-HT816H-1T
- 2TB HDD: AVR-HT816H-2T
- 3TB HDD: AVR-HT816H-3T
- 4TB HDD: AVR-HT816H-4T
- 6TB HDD: AVR-HT816H-6T
- 8TB HDD: AVR-HT816H-8T
- 12TB HDD: AVR-HT816H-12T
- 16TB HDD: AVR-HT816H-16T
- 18TB HDD: AVR-HT816H-18T
- 20TB HDD: AVR-HT816H-20T
- 24TB HDD: AVR-HT816H-24T
- 28TB HDD: AVR-HT816H-28T
- 32TB HDD: AVR-HT816H-32T
- 36TB HDD: AVR-HT816H-36T

DESCRIPTION AVR-HT816H

Video Input	16 Channels
Output	HDMI x 1: 3840 x 2160 / 1920 x 1080 / 1280 x 1024 / 1024 x 768 VGA x 1: 1920 x 1080 / 1280 x 1024 / 1024 x 768 BNC x 1: CVBS (used as the main or spot output)
HD-Analog Input Resolution	4K / 4K Lite / 5MP / 5MP Lite / 4MP / 4MP Lite / 3MP / 1080P / 720P / WD1 / D1
IP Input Resolution	4K / 5MP / 4MP / 3MP / 1080P / 960P / 720P
Incoming Bandwidth (Mbps)	32 (Max 64)
Outgoing Bandwidth (Mbps)	96
Video Compression	Standard H.264 / H.265
Network Input	16 Channel IPC Audio Input
Local Input	RCA x 8
Local Output	RCA x 1
2-Way Audio	Take up channel one audio input
HDMI Audio Output	Yes
Compression	G.711(U/A)
Resolution	4K / 4K Lite / 5MP / 5MP Lite / 4MP / 4MP Lite / 3MP / 1080P / 720P / WD1 / D1
Channels	4K @7/6fps (NTSC/PAL) / 4K Lite @15/12fps (NTSC/PAL) / 5MP @12fps (NTSC/PAL) / 5MP Lite @20fps (NTSC/PAL) / 4MP & 3MP @ 15fps(NTSC) & 12fps(PAL) / 4MP Lite / 1080P / 720P / WD1 / D1 @30fps(NTSC) & 25fps(PAL)
Frame Rate	30fps(NTSC) / 25fps(PAL)
Bit Rate	32Kbps ~ 8Mbps
Record Stream	Dual Stream Recording
Mode	Manual, Timer, Motion, Smart Event
Smart Search	Highlight Colors to Display Camera Record in a certain period of time, Different Colors refer to Different Record Events
Search	Time slice / Time / Event / Tag Search / Smart Search
Function	Play, Pause, Fast Forward, Fast Rewind, Digital Zoom, etc.
Simultaneous Playback	Max 16 Channels
Live/Playback	1 Channel @ 8MP / 16 Channels 1080P @ 30FPS
Alarm Input	16 Channels Local Alarm Input; IPC Alarm Input Supported
Alarm Output	4 Channels
Alarm Trigger	Manual, Motion, Exception, Smart Event
HDD Interface	SATA x 2, Max 18TB per HDD; e-SATA x 1
Network Backup	Yes
Local Backup	USB Flash Drive, USB Mobile HDD
Interface	RJ45 1,000 Mbps x 1
Protocol	TCP/ IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS
RS-485	Yes (Half-Duplex), Connect to PTZ or Keyboard
Remote Controller	Optional
USB	USB 2.0 x 2
Power Supply	DC 12V/4A
Power Consumption	≤ 30W (Without HDD)
Working Environment	14°~122°F (-10°~50° Celcius)
Working Humidity	10%~90% (Non-Condensing)
Dimensions	14.96" x 10.55" x 1.77" (380mm x 268mm x 45mm)

insectetuer adipiscing
uismod. Ut wisi
erat volutpat. Ut wisi
ostrud exercitation
sl ut aliquip ex ea com-
el euismod in
e molestie consequat, vel
cilisis at vero eros et
im qui blandit praesent
is dolore te feugait nulla

MOBILE APP

AVYCON APP ON



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606 / 888-833-4611 (Canada Toll-Free)

email: info@avycon.com

social: @avycon_aivo

website: avycon.com