


PRODUCT SPECIFICATION

| DATE | REV | ECN | DESCRIPTION |
|----------|-----|-----|----------------|
| 2/8/2013 | B | | ADDED MIN TEMP |

Parent Number: **F4T034-**

Description: 4/0 19x111/30 TC AWM 3340 or 3374 CL
1503 or AWM I A/B

DIAMETER: 0.720
TOLERANCE \pm : 0.015

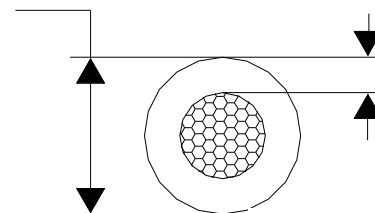

MIN AVG WALL: 0.080

MINIMUM WALL: 0.072

Stranding: 19x111/30 TC Unilay

Style: UL: AWM 3340 or 3374 CSA: CL 1503 or AWM I A/B

Insulation: POE (EPDM)

Print Legend: 4/0 AWG (107.2mm²) E57498 (PLANT ID CODE) (AWM LOGO) AWM STYLE 3340 OR 3374 125C(FLEX)/150C(NO-FLEX) 600V EP -- 156205
CSA CL1503 150C 600V OR AWM I A/B 125C 600V FT2 -- MADE IN USA

Voltage: 600V

Temperature: 125C (FLEX)/150C (NO-FLEX)

- Notes:
1. Bend Radius is twice the diameter of the finished wire per the Cold Bend Test requirements of UL 758.
 2. Min Temp Rating: -40C

This product complies with European Directive 2015/863 -- RoHS 3.

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ Date: _____

Title: _____ Company Name: _____



Southwire

Copperfield®

1115 W. North Street

Bremen, IN 46506

Phone: 1-574-546-5115