

LJK6CCHD


Part Number: **LJK6 CC HD**
Base Colour

CC = Colour Code / Available in:

White, Blue, Black, Green, Ivory, Orange, Red and Yellow.*

Application:

For ISO/IEC 11801 Class E UTP installations. Compatible with Liberty Face-plates, Surface Mount Boxes and Modular Patch Panels. Recommended for use in Commercial, MDU and Residential network applications.

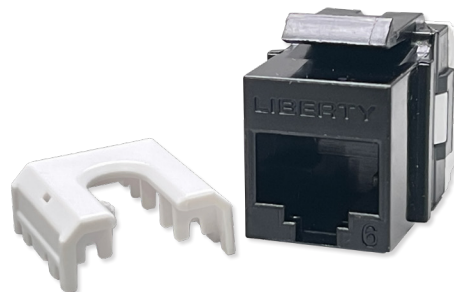

Construction Materials:

Housing	High Impact ABS Plastic, UL 94 v-0 Rated
PCB	FR4, 1.6mm Thickness
IDC	Phosphor Bronze Alloy Plated W/100 Micro-Inch of Tin Spring Wire Phosphor Bronze Alloy Plated W/50 Micro-Inch Of Gold Over 70 ~ 100 Micro-Inch of Nickel


Termination:

Liberty One Punch tool NJKCRIMPHD or 110 Termination tool

Mechanical Specifications:

Conductor Gauge, Solid	22 AWG 24 AWG 26 AWG
Conductor Gauge, Stranded	22 AWG 24 AWG
Wiring	T568A T568B

Mechanical Drawings:

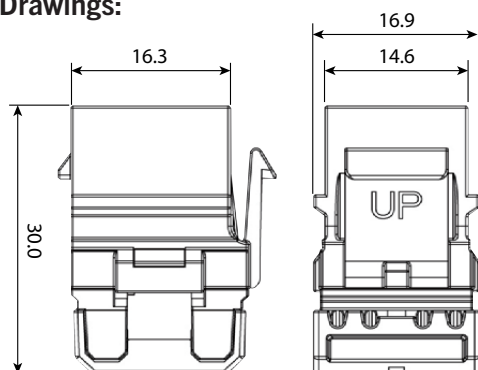

Part # Colour Legend:

CC

White	WH
Blue	BL
Black	BK
Ivory	IV
Green	GN
Orange	OR
Red	RD
Yellow	YL

* Other Colours available subject to minimum orders

Standards Compliance:

ANSI/TIA 568 D.2
ISO 11801 Class E Category 6, IEC 60603-7-4
ANSI/TIA 1096-A (formerly FCC part 68)
UL 1863 Safety Listed
UL 94V-0 Flammability standard
RoHS 2011/65/EU
Supports Remote Powering IEEE 802.3bt type 1-4

Dimensions:

Depth	30 mm 1.18 in
Height	16.9 mm 0.665 in
Width	14.6 mm 0.575 in

Country of Origin:

Made in Taiwan

