

100Gig™ QSFP28 Active Optical Cable Assemblies


Low Latency 100Gb/s Fiber Optic Interconnect Solution for Leaf to Spine Switching and Top of Rack Applications

As virtualization, consolidation, and convergence initiatives continue to grow, so do the demands placed on the physical infrastructure. To meet the needs for faster processing speeds, server inter-connect and I/O consolidation deployments, Panduit offers 100Gig™ QSFP28 Active Optical Cable Assemblies.

The QSFP28 Active Optical Cable Assemblies are constructed with a 3.0mm 8-fiber round unitary cable available in PVC rated jacket materials. These cords are available in OM4 multimode fiber type with high performance insertion loss essential for today's high-speed systems requiring very low connector insertion loss.

QSFP28 100Gig™ cable assemblies provide four channels of 25 Gb/s in one cost effective interface that offers up to four times the density of SFP28 25Gig™ cable assemblies.

End-to-end high-speed data transport systems from Panduit deliver enhanced availability, agility, and security. Visit www.panduit.com to learn more about how these solutions help customers manage risk across the physical infrastructure.

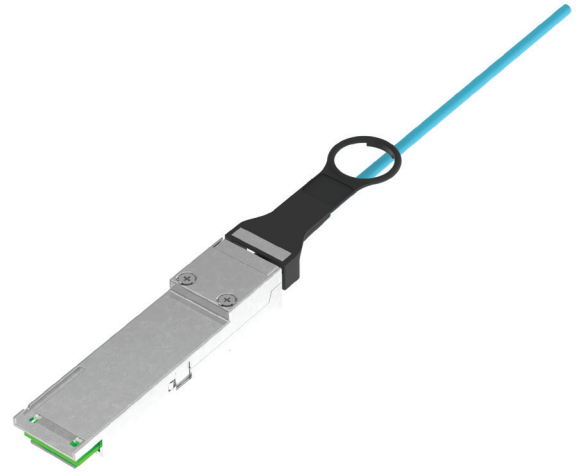

Key Features	Benefits
100% performance tested	Confidence that each assembly delivers specified performance for ensured network availability
Compliant to SFF-8636, SFF-8661 and SFF-8679	Ensuring 100 Gb/s performance when mated to any SFF-8636 QSFP28 compliant host port
Robust construction	Multimode fiber cable, factory terminated to QSFP28 100 Gb/s hot pluggable modular connectors; rated to a minimum 50 mating cycles
Low latency performance	Ideal for high performance computer clustering and other latency sensitive applications
Low power active circuitry	Provides a low cost interconnect alternative to optical transceivers that can be driven off the existing port power
Low profile	Robust easy-to-use connector latching feature allows easy installation in traditional and belly-to-belly high density installations
Small diameter cable design	Enables proper cable management and improved air flow
Built-in strain relief	Ensures proper bend radius control for reliable deployment
Variety of lengths	Available 1 to 30 meters for design flexibility

Key applications include:

- Top of Rack, End of Row, Middle of Row Switching
- I/O Consolidation
- Fibre Channel Over Ethernet (FCOE)
- 100Gig™ Ethernet
- High Performance Computer Clustering


100Gig™ QSFP28 Active Optical Cable Assemblies

Technical Information

Characteristic impedance	100 +/- 10 Ω
Temperature range	0°C to 70°C (32°F to 158°F)
IEC flame compliance	IEC 60332, 60333, 60324
Bend radius	5 x O.D. single time, 10 x O.D. repeated times; O.D. – 3.0mm
Insertion force to cage	18N (4 lbf.) maximum
Withdrawal force from cage	12.5N (2.8 lbf.) maximum
Retention force	90N (20 lbf.) minimum
ROHS status	Compliant

Ordering Information

Part Number	Length (m)	Length (Ft.)	Fiber Type	Jacket
AZ83NQ2Q2AQM001	1	3.3	OM4	PVC
AZ83NQ2Q2AQM002	2	6.6	OM4	PVC
AZ83NQ2Q2AQM003	3	9.8	OM4	PVC
AZ83NQ2Q2AQM005	5	16.4	OM4	PVC
AZ83NQ2Q2AQM007	7	23.0	OM4	PVC
AZ83NQ2Q2AQM010	10	32.8	OM4	PVC
AZ83NQ2Q2AQM015	15	49.2	OM4	PVC
AZ83NQ2Q2AQM020	20	65.6	OM4	PVC
AZ83NQ2Q2AQM025	25	82.0	OM4	PVC
AZ83NQ2Q2AQM030	30	98.4	OM4	PVC

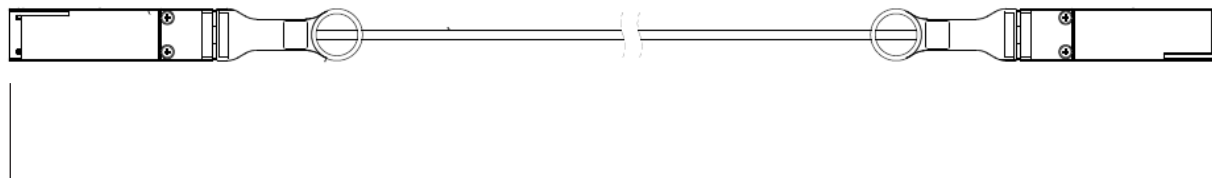

" L "

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2021 Panduit Corp.
ALL RIGHTS RESERVED.
FBCB55-WW-ENG
1/2021