


Fire
Alarm

L1604-7018

Industry Approvals:

- National Electrical Code Article 725
- UL Standard 13 Type CL3P
- National Electrical Code Article 760
- UL Standard 1424 Type FPLP
- National Electrical Code Article 800
- UL Standard 444 Type CMP
- EU Directive 2011/65/EU RoHS Compliant

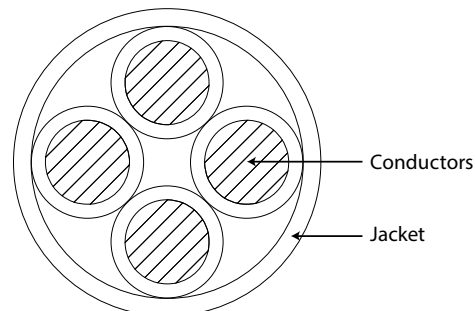

Part Number: L1604 - 7018 - CC - LL

Base Jacket Color Put Up

See Complete Part Number Legend & Example Below

Construction:

Component	Description	Specification
Conductor:	16 AWG Solid Bare Copper	0.051" Nominal diameter
Insulation:	0.009" Wall, LSPVC	0.069" Nominal diameter
Cable Assembly:	4 Conductors with a 7.50" LHL	0.167" Nominal diameter
Ripcord:	Yes	
Jacket:	0.015" Wall, LSPVC	0.200" ± .008" diameter
Sequential Footage		Every 2 feet
Print Legend:	LIBERTY L1604-7018 16 AWG 4 COND SLD BC LSPVC/LSPVC JKT 351483-(**) (UI logo) FPLP/CL3P/CMP 75c MADE IN (COO) (DATE CODE MM/YY) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 ****(FT)	

Physical & Electrical Properties:

Temperature:	-0°C to +75°C
Voltage:	300 Vrms (Maximum)
Conductor Resistance (DCR):	4.10 Ohms/1000ft (Maximum) @ 20°C
Capacitance (Cond-Cond):	35.0 pF/ft (Nominal) @ 1kHz
Characteristic Impedance:	55.0 Ohms (Nominal) @ 1MHz

Put Up Legend:

11	1000 Foot Box
11	1000 Foot Reel
50	500 Foot Box
51	500 Foot Spool in a carton

Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange	15	Natural

Conductor Color Code:

Conductor	Color
1	Black
2	Red
3	Brown
4	Blue