


Description:

22(7)BC 2 CONDUCTOR PVC/OVER ALL ALMY SHILD & DRN/PVC CMR/CL3R/FT4/FPLR

Industry Approvals:

- National Electric Code Article 800
- UL Standard 444 Type CMR
- National Electric Code Article 725
- UL Standard 13 Type CL3R
- National Electric Code Article 760
- UL Standard 1424 Type FPLR

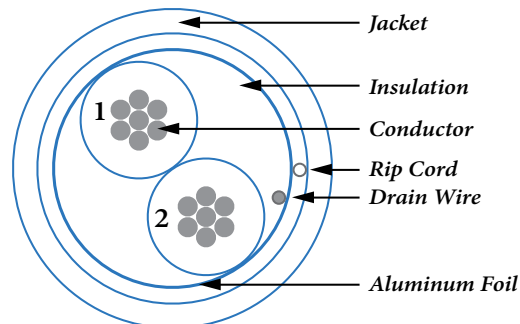

Part Number: **L2202 - 1106 - CC - LL**

Base Jacket Color Put Up

See Complete Color and Put Up Legends Below

Electrical Performance:

Temperature:	-20° to 75°
Voltage:	300 Volt RMS
Conductor Resistance (DCR):	16.9Ω/1000FT at 20°

Construction:

Conductor	2 Core (Strand)
Material	Oxygen Free Bare Copper
Size	22 AWG
Diameter	7/0.243mm

Jacket:

Material	PVC
Thickness	0.015"
Overall Diameter	0.154"
Rip Cord	Yes

Insulation:

Material	PVC
Diameter	0.0449"
Color	Red, Black
PE Tape	Yes
Drain Wire(TC)	7/0.0096"
AL Foil	Yes

Jacket Marking:

LIBERTY L2202-1106 22 AWG 2 STR BC PVC OAS & DRN PVC JKT E340599-(**) cUL)u CMR FT4 OR (UL LOGO) CL3R/FPLR 75c MADE IN (COO) (date and lot code) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 ****(FT)

Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Put Up Legend:

10	1000 Foot Boxes
11	1000 Foot Reel
50	500 Foot Boxes
52	500 Foot Coil Packs