

TECHNICAL SPECIFICATIONS

Audio
&
Security


L1404-1306

Description:

14(105)BC 4 CONDUCTOR PVC/PVC HIGH FLEX SPEAKER CABLE CMR/CL3R/FT4

Industry Approvals:

- National Electric Code Article 800
- UL Standard 444 Type CMR
- National Electric Code Article 725
- UL Standard 13 Type CL3R
- National Electric Code Article 760
- UL Standard 1424 Type FPLR

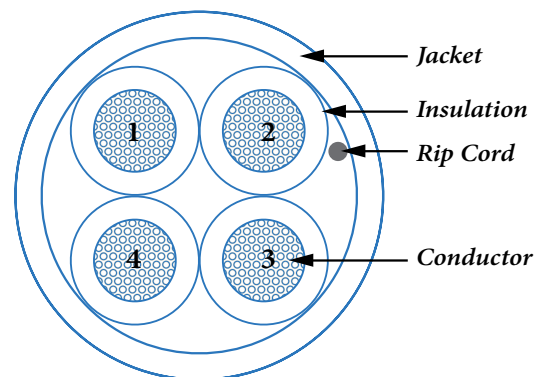

Part Number: L1404 - 1306 - CC - LL

Base Jacket Color Put Up

See Complete Part Number Legend & Example Below

Electrical Performance:

Temperature Rating	-20° to 75°
Voltage Rating	300 Volt RMS
DC Resistance	2.62Ω/1000FT at 20°C

Insulation:

Material	PVC
Diameter	0.0945"
Color	Red, Black, Green, White

Jacket:

Material	PVC
Thickness	0.015"
Overall Diameter	0.260"
Rip Cord	Yes

Construction:

Conductor	4 Core (Strand)
Material	Oxygen Free Bare Copper
Size	14 AWG
Diameter	105 Strand

Jacket Marking:

LIBERTY SPEAKER L1404-1306 14 AWG 4 COND 105 STR BC PVC/PVC JKT E340599-(**) (cULus logo) CMR FT4 75c MADE IN (COO)
(mfg date and lot code) DEVICE A B C D E F ZONE 0 1 2 3 4 5 6 7 8 9 *** (FT)

Jacket Color:

01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Put-Up:

10	1000 Foot Boxes
11	1000 Foot Reel
50	500 Foot Boxes
52	500 Foot Coil Packs