



TECHNICAL SPECIFICATIONS

Fire Alarm Cable


16/4 Solid Non-Shielded Riser

PART NUMBER: L1604 - 7016 - CC LL

See part legend below

DESCRIPTION:

16 AWG 4 Conductor Solid Twisted OFC SRPVC/FRPVC Fire Alarm Riser Cable

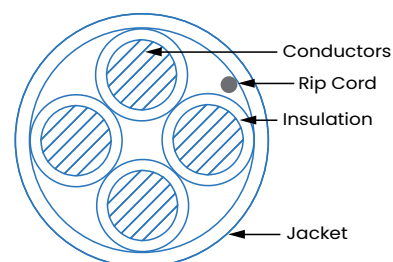

Conductor	
Assembly	4 Core Twisted with a 3.70" LHL
Material	Oxygen Free Bare Copper
Copper Size	16 AWG (Solid)
Diameter	0.051 in. : 1.30 mm

Insulation	
Material	Semi-Rigid Polyvinyl Chloride (SRPVC)
Thickness	0.009 in. : 0.22 mm
Diameter	0.069 in. : 1.75 mm
Color Code	Black, Red, Brown, Blue

Shielding	
Foil	None
Diameter	None
Drain Wire	None

Jacket	
Material	Flame Retardant Polyvinyl Chloride (FRPVC)
Thickness	0.015 in. : 0.38 mm
Overall Diameter	0.200 in. : 5.00 mm
Rip Cord	Yes

Industry Approvals

National Electric Code®	Article 725
UL Standard 13	Type CL3R
National Electrical Code®	Article 760
UL Standard 1424	Type FPLR
EU RoHS III 2015/863/EU Compliant	
EU REACH SVHC - 1907/2006/EC: 01/23/2024 (240)	

Electrical Performance

DC Resistance (68° F : 20° C)	4.10 Ω/1000FT : 13.50 Ω/KM
Capacitance	35.27 pF/FT : 115.69 pF/M
Characteristic Impedance	28.74 Ω
Voltage Rating	300V
Temperature Rating	-4° F to 167° F : -20° C to 75° C

Installation

Pull Tension	83 Lbs. : 369 N
Bend Radius	2.00 in. : 50.00 mm unloaded
Bend Radius	4.00 in. : 100.00 mm loaded

PART LEGEND

Jacket Color (CC)					
01	White	05	Yellow	09	Gray (Slate)
02	Black	06	Blue	10	Purple
03	Red	07	Brown	11	Beige
04	Green	08	Orange		

Put-up (LL)

10	1000 Foot Box
11	1000 Foot Reel
50	500 Foot Box
52	500 Foot Coil Pack