


5MP Multi Format Outdoor PTZ Camera

33x Zoom, DWDR, 450' IR, IP66

LA5PTZ33X

FEATURES:

- ◆ NDAA Compliant
- ◆ Supports TVI, CVI, AHD & 960H Formats
- ◆ 5MP Resolution (2560×1920) @20FPS
- ◆ 33X Optical Zoom (4.6 ~ 152mm)
- ◆ 12 High Power IR LED - 450' IR Range
- ◆ True Day/Night IR Cut Filter
- ◆ 360° Endless Panning
- ◆ UTC & RS-485 Control
- ◆ Pelco P & D Protocol
- ◆ 128 Preset Positions
- ◆ 4 Tours - Up to 32 Presets Each
- ◆ 4 Alarm Inputs / 1 Output
- ◆ -40° Operating Temp
- ◆ Built-in Heater & Fan
- ◆ Includes Wall Mount & 24VAC Power Supply
- ◆ IP66 Weatherproof


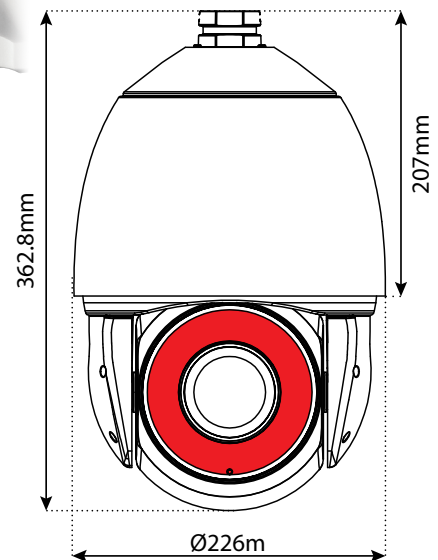


LA5PTZ33X

INCLUDED ACCESSORIES:

- 1x Quick start guide
- 3x Hex socket screws
- 2x Hex wrench
- 3x Mounting inserts & screws
- 1x 24VAC Power Adapter
- 1x Wall mount
- 2x Glove
- 3x Terminal block
- 1x Threaded mount adapter 1.5" NPT
- 1x Safety wire

WALL MOUNT DIMENSIONS

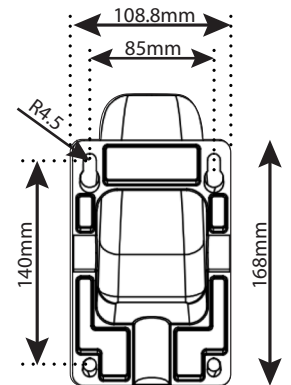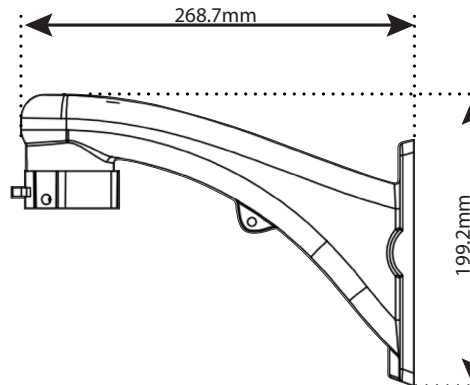

5MP Multi Format Outdoor PTZ Camera

33x Zoom, DWDR, 450' IR, IP66

LA5PTZ33X

	SPECIFICATION	LA5PTZ33X
Camera	Image Sensor	1/2.7" Progressive Scan CMOS
	Image Resolution	5MP (2560×1920)
	Frame Rate	20fps
	Min. Illumination	Color: 0.01Lux @ (F1.2, AGC ON) B/W: 0Lux @ (IR LED ON)
	White Balance	Auto / ATW / AWC-Set / Indoor / Outdoor / Manual / AWB
	AGC	Auto (1 ~ 15 Adjustable)
	S/N Ratio	More than 52dB
	2D & 3D DNR	Auto / Off / Low / Middle / High
	Backlight Compensation	Off / On, (HLC Off / On)
	D-WDR (Wide Dynamic Range)	Digital WDR
	Shutter Time	AUTO, 1/25, 1/50, FLK, 1/200, 1/400, 1/1000, 1/2000, 1/5000, 1/10000, 1/50000, X2, X4, X6, X8, X10, X15, X20, X25, X30
	True Day & Night	Yes - Mechanical IR Cut Filter
	Digital Zoom	Yes: 1 ~ 20X
	Privacy Mask	Yes: 4-Zone
Input / Output	Video Output	Single BNC Output for TVI, CVI, AHD & 960H / Dipswitch for Switching Formats
	RS-485 Interface	Yes - Protocols: Pelco P & D (Auto-sensing) only
	UTC Function	Yes - Up the Coax Control Available
IR	IR LED / Distance / nM	12 IR LEDs / Up to 450' / 850nm
	IR Intensity	Proportional to Zoom Level
Lens	Focus Mode	Auto / Semi-Automatic / Manual
	Focal Length	4.6 ~ 152mm / 33X Optical Zoom
	Zoom Speed	Approx.6.2s (Optical Wide-Tele)
	Angle of View	H: 55.2° ~ 3.2°
	Min. Working Distance	11.8"
	Aperture	F1.6 ~ F4.8 (Auto IRIS)
Pan & Tilt	Pan Range	Pan: 0° ~ 360° Endless
	Pan Speed	Pan: 200° / Second
	Tilt Range	Tilt: 0° ~ +90°
	Tilt Speed	Tilt: 180° / Second
	Proportional Zoom	Auto Adjusts Speed for Zoom Level
	Number of Preset	128
	Tour	4 Tours - Adjustable Speed & Park Time
	Pattern	355° Programmable, 4 scan
	Power-off Memory	Yes - Tour, Preset, Pattern & Scan Can be Set
	Park Action	Yes - Tour, Preset, Pattern & Scan Can be Set
	Scheduled Task	Presets / Scan / Patterns / Tour
General	Menu Language	ENG /CHN 1/CHN 2/ GER / FRA / ITA / SPA / POL / RUS / POR / NED / TUR
	Power Requirement	AC 24V / 2.5A (With the Heater On)
	Power Consumption	9W (IR OFF), 35W (IR ON)
	Operating Temperature	-40 °C ~ 60 °C (-40°F ~ 140 °F)
	Weatherproof Rating	IP66
	Certification	CE/FCC
	Dimensions	Ø226x.336.5mm - PTZ body only
	Housing / Color	Metal / White
	Included	Wall Mount & 24VAC Power Supply
	Net Weight	5Kg (11.02 lb) - PTZ body only

Optional Mounting Accessories for LA5PTZ33X:


L3PTZJB Junction box

Features:


- ◆ Manages & Protects Cables
- ◆ Hinged Door for Easy Installation
- ◆ 3/4" Conduit Access
- ◆ For Indoor & Outdoor Use



L3PTZJB



L3PTZJB Lineart




L3PTZPENDMT Pendent cap

Features:


- ◆ Pendent Mount for Dome Camera
- ◆ Aluminum Alloy
- ◆ For Indoor & Outdoor Use



L3PTZPENDMT



L3PTZPENDMT Lineart




L3PTZCRNMT Outside corner mount

Features:


- ◆ For Indoor & Outdoor Use
- ◆ Heavy Duty Steel Construction



L3PTZCRNMT



L3PTZCRNMT Lineart




L3PTZPOLEMT Pole mount

Features:

- ◆ Metal Straps Included
- ◆ For 7-8" Pole Diameters
- ◆ For Indoor & Outdoor Use



L3PTZPOLEMT

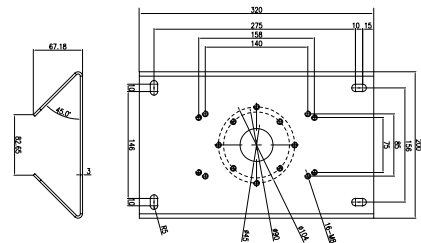

L3PTZPOLEMT Lineart