



TECHNICAL SPECIFICATIONS

Patch Panel

Category 5E 48 Port


PART NUMBER: LPP5E48P

APPLICATION:

Liberty 48 port Cat 5E patch panels are mounted in 19" relay racks and wall mount brackets.

FEATURES:

- Exceeds ANSI/TIA-568 Category 5E performance
- Supports network speeds up to 1 Gbps Ethernet
- Supports PoE applications up to 60 Watts
- Suitable for residential, MDU, small office and low-density communication closets
- Replaceable 6 port modules
- Integrated rear side cable management bar, 1 per 1U

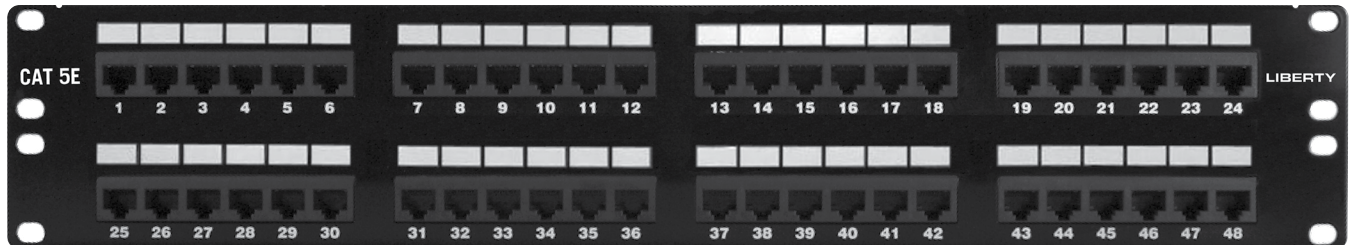

Specifications

Conductor Gauge, Solid	22 AWG 24 AWG 26 AWG
Conductor Gauge, Stranded	22 AWG 24 AWG
Wiring	T568A T568B
Termination	110 IDC

Dimensions

Length	19 in. : 482.6 mm
Height	3.5 in. : 88.9 mm
Rack Mount Units	2U

Construction

- 16 gauge steel
- PCB and plastic components are UL94V-0

Industry Standards

- ANSI/TIA-568 Cat 5E compliant and channel compliant
- ISO 11801 Class D
- ANSI/TIA 1096-A (FCC Part 68)
- IEEE 802/3bt PoE up to 60 Watts
- UL 1863 Safety Listed

Liberty specifications are nominal and subject to change without notice.
Registered trademarks are held by the respective owners.